



POWER-LITE®

Certainty at The Speed of Light



16W LED BACKLIT

PANEL

BLP16W-30/60

The POWER-LITE® LED 16W Backlit Panel is produced using state of the art automated production lines, to provide a cost effective LED panel for all applications.



APPLICATIONS

Office | Retail
Healthcare
Commercial




☎ 1800 909 306
🌐 nedlandsgroup.com.au
✉ sales@nedlandsgroup.com.au



POWER-LITE®

Certainty at The Speed of Light

DIMENSIONS

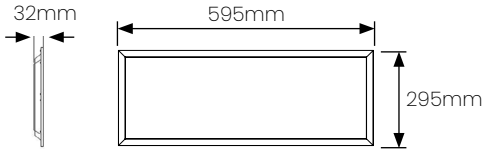

Note:

- IC Rating for panel only (driver is NOT IC-4 rated)

LED Chip
CRI80 SMD

Life Expectancy
50,000 hrs TM-21

SCDM
<6 Macadam steps

Working Temp.
-20°C to +45°C

Power Factor
>0,9

UGR
<22

Efficacy
Up to 104lm/W

LED Driver
Non-Dimmable
Flicker Free

Connection
1.5m power cable with
AU plug


Replaces
36W Fluorescent

Net Weight
3.5kg


Carton Qty
5



16W



400K
1707lm



6000K
1629lm



AC200-240V



White Frame
Colour

PRODUCT

OPTIONS

CODE

16W LED BACKLIT PANEL



4000K

BLP16W-30/60




6000K

BLP16W-30/60-CW



IP20



120°
Beam Angle



POWER-LITE®

Certainty at The Speed of Light


ACCESSORIES

CODE

FLUSH MOUNT PANEL KIT




To fit Panel Size




300mm x 600mm

Overall Frame Coverage



320mm x 620mm




302mm x 602mm

LED-LPFM-30/60

CABLE SUSPENSION KIT



Length 1m



Carton Qty 1

LED-LPCSK

LED DRIVERS

Options



DIMMABLE

BLP16W-D-DIM



EMERGENCY KIT

LPE-EP

SENSORS

Mount Type

Detection Range

Detection Distance



Recessed



360°



12m

MS-12M-360



360°



16m

MS-8M-360-MW



Surface Mount



360°



6m

MS-6M-360



360°



12m

MS-12M-360-SM



180°



12m

MS-12M-180



360°



16m

MS-8M-360-SM-MW




POWER-LITE®

Certainty at The Speed of Light

PHOTOMETRICS

BLP16W-30/60 | 4000K

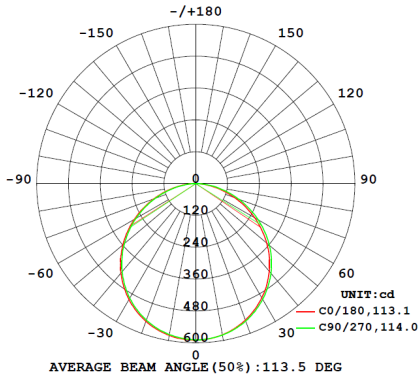

BLP16W-30/60-CW | 6000K

