



POWER-LITE®

Certainty at The Speed of Light



45W LED BACKLIT

PANEL

BLP45W-120/60-CC

The POWER-LITE® LED 45W Backlit Panel is produced using state of the art automated production lines, to provide a cost effective LED panel for all applications.



APPLICATIONS

Office | Retail
Healthcare
Domestic
Commercial




☎ 1800 909 306
🌐 nedlandsgroup.com.au
✉ sales@nedlandsgroup.com.au



POWER-LITE®

Certainty at The Speed of Light


DIMENSIONS

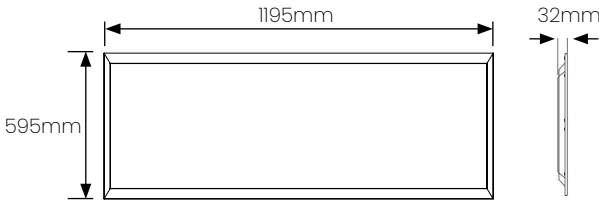

Note:

- IC Rating for panel only (driver is NOT IC-4 rated)

PHOTOMETRICS

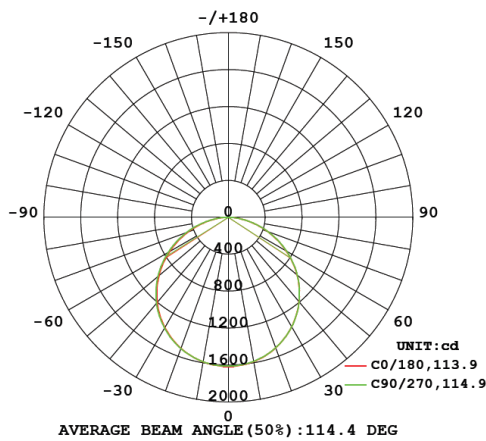

LED Chip
CRI80 SMD

Life Expectancy
50,000 hrs TM-21

SCDM
<6 Macadam steps

Working Temp.
-10°C to +40°C

Power Factor
>0,9

CRI
>80

Efficacy
Up to 120lm/W

LED Driver
Triac Dimmable
Flicker Free

Connection
1.5m Power Cable with
SAA Plug

Replaces
144W Fluorescent

Net Weight
3.2kg

Carton Qty
4

45W

3CCT

3000K
4733lm

4000K
4877lm

5700K
4795lm

AC200-240V

White Frame
Colour

PRODUCT

45W LED BACKLIT PANEL

CODE

BLP45W-120/60-CC

IP20

120°
Beam Angle



POWER-LITE®

Certainty at The Speed of Light

ACCESSORIES

CODE

FLUSH MOUNT PANEL KIT



To fit Panel Size

1195mm x 595mm

Overall Frame Coverage

1220mm x 620mm

1202mm x 602mm

LED-LPFM-120/60

CABLE SUSPENSION KIT



Length 1m

Carton Qty 1

LED-LPCSK

LED DRIVERS

Options



DIMMABLE

BLP45W-D-DIM



DALI DIMMABLE

BLP45W-DALI

EMERGENCY KIT

LPE-EP

SENSORS

Mount Type

Detection Range

Detection Distance



Recessed

360°

12m

MS-12M-360



360°

16m

MS-8M-360-MW



Surface Mount

360°

6m

MS-6M-360



360°

12m

MS-12M-360-SM



180°

12m

MS-12M-180



360°

16m

MS-8M-360-SM-MW