




POWER-LITE®

Certainty at The Speed of Light

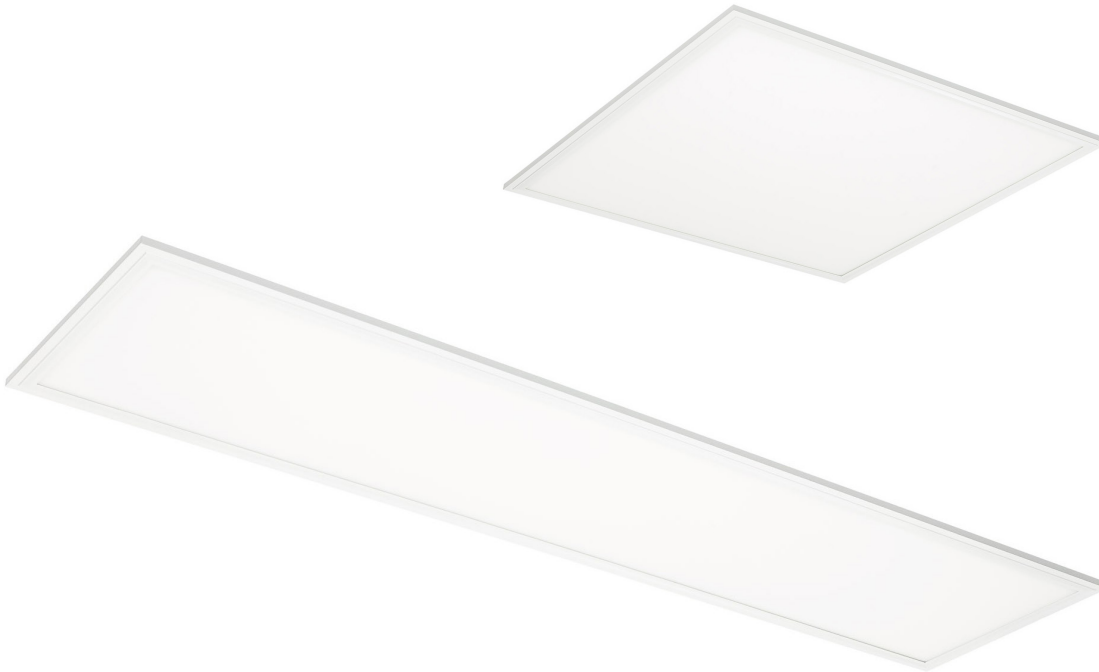

LED VEET & IPART APPROVED

PANEL

LED-LPE

The POWER-LITE® VEET & IPART approved LED light panel is designed for LED retro-fit installations in NSW & VIC. VEET & IPART approval enables the client to receive a rebate when installed in an eligible installation.



APPLICATIONS

Commercial
Healthcare
Education
Hospitality



☎ 1800 909 306
🌐 nedlandsgroup.com.au
✉ sales@nedlandsgroup.com.au




POWER-LITE®

Certainty at The Speed of Light

DIMENSIONS

(L x W mm)

LED-LPE18W-30/60	295 x 595
LED-LPE28W-60SQ	595 x 595
LED-LPE28W-120/30	1195 x 295

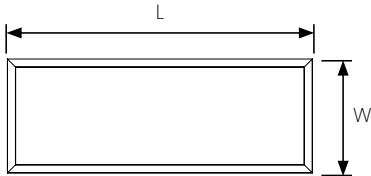

LED Chip
2835 SMD

Efficacy
Up to 116lm/W

Life Expectancy
50,000 hrs TM-21

LED Driver
Lifud flicker free

Working Temp
-20°C to +50°C

Connection
1.2m cable with SAA plug

Power Factor
>0.9


Net Weight
3.8kg

CRI
>80

Replaces
72W fluorescent

UGR
<22

Carton Qty
5



PRODUCT

SPECIFICATIONS

CODE

LED VEET & IPART
APPROVED PANEL



18W



295mm x
595mm



4000K
1958lm



5000K
1961lm



6000K
1966lm

LED-LPE18W-30/60

LED-LPE18W-30/60-5K

LED-LPE18W-30/60-CW



28W



595mm x
595mm



4000K
3030lm



5000K
3032lm



6000K
3035lm

LED-LPE28W-60SQ

LED-LPE28W-60SQ-5K

LED-LPE28W-60SQ-CW



28W



1195mm x
295mm



4000K
3024lm



5000K
3025lm




6000K
3030lm

LED-LPE28W-120/30

LED-LPE28W-120/30-5K

LED-LPE28W-120/30-CW





POWER-LITE®

Certainty at The Speed of Light

ACCESSORIES

CODE

FLUSH MOUNT PANEL KIT

	To fit Panel Size	Overall Frame Coverage		
	300mm x 600mm	320mm x 620mm	302mm x 602mm	LED-LPFM-30/60
	595mm x 595mm	626mm x 626mm	602mm x 602mm	LED-LPFM-60SQ
	1195mm x 295mm	1226mm x 326mm	1202mm x 302mm	LED-LPFM-120/30

LED DRIVERS

	Options		
	STANDARD	For 26W LED light panels	LED-LP28W-D
	DIMMABLE	For 18W LED light panels	LP18W-D-DIM
	DALI DIMMABLE	For 28W LED light panels	LP30W-D-DIM
	EMERGENCY KIT	For 28W LED light panels	LED-LPE30W-DALI
	EMERGENCY KIT	For all LED light panels	LPE-EP

SENSORS

	Mount Type	Detection Range	Detection Distance	
	Recessed	360°	12m	MS-12M-360
		360°	16m	MS-8M-360-MW
	Surface Mount	360°	6m	MS-6M-360
		360°	12m	MS-12M-360-SM
		180°	12m	MS-12M-180
		360°	16m	MS-8M-360-SM-MW




POWER-LITE®


Certainty at The Speed of Light

PHOTOMETRICS

LED-LPE18W-30/60 | 4000K, 5000K, 6000K

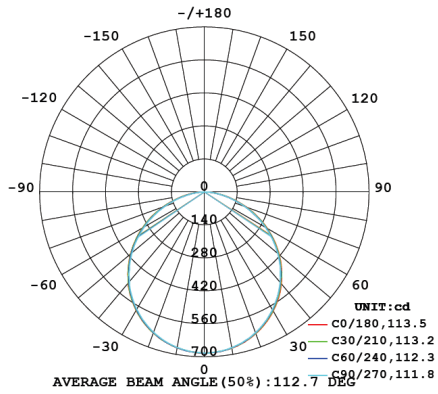

LED-LPE28W-60SQ | 4000K

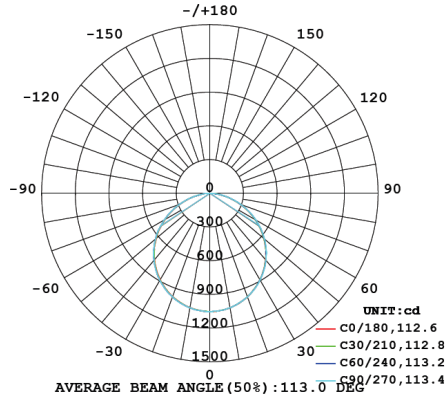

LED-LPE28W-120/30 | 4000K

