
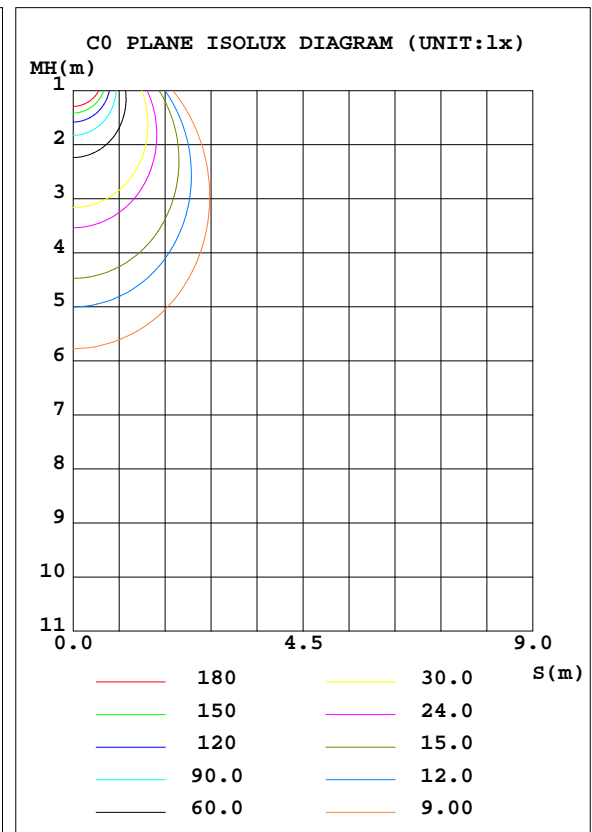


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.20V I:0.0390A P:8.7900W PF:0.9230 Freq:49.99Hz Lamp Flux:743.796x1 lm		
NAME: ID-R-8W-CC 3000K	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.005	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 84.62 lm/W			
MODEL	ID-R-8W-CC 3000K	I _{max} (cd)	299.8	S/MH(C0/180)	1.22
NOMINAL POWER(W)	8	LOR(%)	100.0	S/MH(C90/270)	1.20
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	743.80	η UP, DN(C0-180)	0.7,49.4
NOMINAL FLUX(lm)	743.796	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.6,49.4
LAMPS INSIDE	1	η up(%)	1.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	240	η down(%)	98.8	CIBSE SHR MAX	1.35

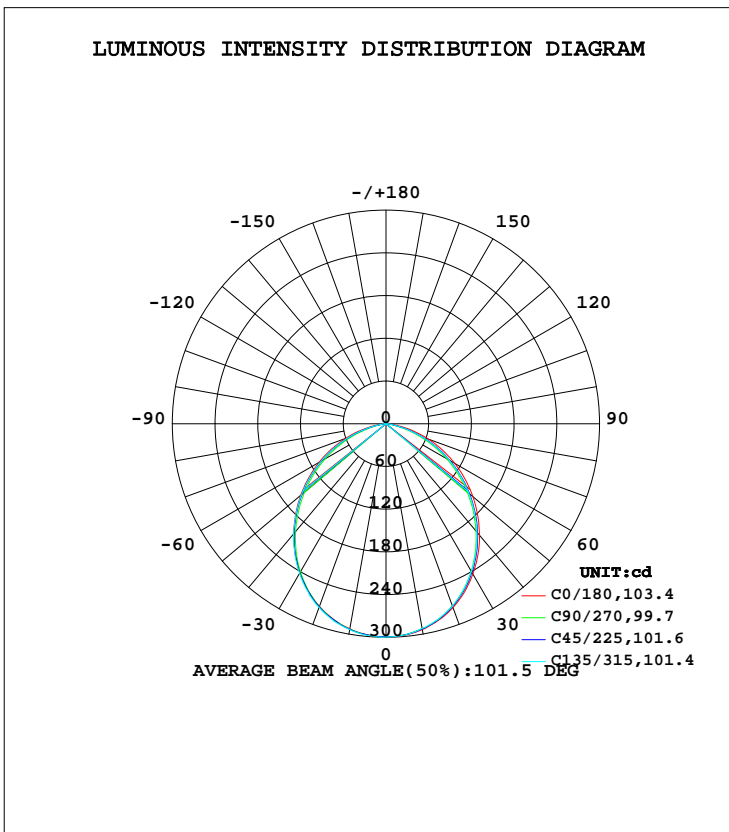

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:10.450m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	292.3	293.2	293.1	293.5	293.6	292.8	292.3	292.0	0- 10	28.28	28.28	3.8,3.8
20	273.0	273.9	273.5	274.7	274.8	273.3	272.3	272.8	10- 20	80.30	108.6	14.6,14.6
30	241.7	241.8	240.1	242.6	244.0	241.3	239.3	239.9	20- 30	119.1	227.7	30.6,30.6
40	201.6	200.7	197.5	201.9	204.3	200.1	196.5	198.7	30- 40	138.6	366.3	49.2,49.2
50	156.4	153.6	149.3	154.7	159.3	153.5	148.8	151.7	40- 50	136.6	502.9	67.6,67.6
60	108.7	104.3	98.64	105.2	111.7	103.9	98.44	102.6	50- 60	115.2	618.1	83.1,83.1
70	60.73	54.75	48.23	54.98	63.50	54.44	48.29	53.45	60- 70	78.44	696.5	93.6,93.6
80	17.37	11.60	8.140	11.46	19.45	11.26	8.403	10.99	70- 80	33.94	730.5	98.2,98.2
90	0.2813	0.4519	0.1985	0.2439	0.2274	0.2054	0.1833	0.2205	80- 90	4.118	734.6	98.8,98.8
100	0.5923	0.5652	0.4892	0.5735	0.4976	0.4172	0.4261	0.4335	90-100	0.3910	735.0	98.8,98.8
110	1.024	1.003	0.9153	0.9925	0.8785	0.8128	0.7844	0.8155	100-110	0.7356	735.7	98.9,98.9
120	1.534	1.480	1.419	1.455	1.368	1.273	1.260	1.256	110-120	1.128	736.9	99.1,99.1
130	2.032	1.948	1.925	1.897	1.763	1.713	1.685	1.697	120-130	1.434	738.3	99.3,99.3
140	2.420	2.395	2.175	2.337	2.202	2.094	2.154	2.072	130-140	1.569	739.9	99.5,99.5
150	2.785	2.732	2.775	2.682	2.509	2.444	2.491	2.461	140-150	1.507	741.4	99.7,99.7
160	2.999	3.032	3.120	2.998	2.772	2.680	2.769	2.733	150-160	1.274	742.6	99.8,99.8
170	3.116	3.222	3.152	3.174	3.043	2.988	3.025	2.990	160-170	0.8458	743.5	100,100
180	3.255	3.332	3.267	3.306	3.262	3.346	3.259	3.328	170-180	0.3014	743.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 436.12 lm

%lum = 58.6%
%lamp = 58.6%

Conical surface Flux(120deg): 618.11 lm


%lum = 83.1%
%lamp = 83.1%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:10.450m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.20V I:0.0390A P:8.7900W PF:0.9230 Freq:49.99Hz Lamp Flux:743.796x1 lm		
NAME: ID-R-8W-CC 3000K	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.005	Shielding Angle:

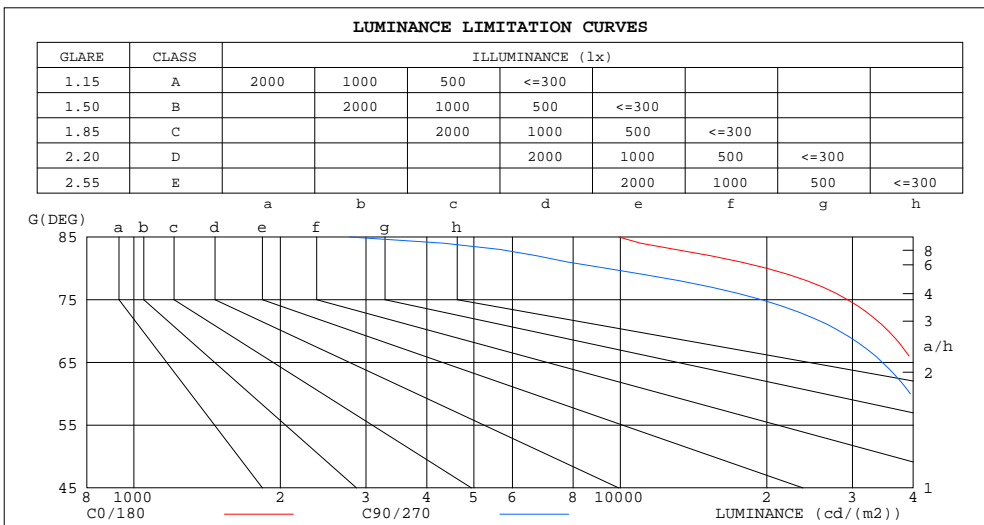

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9922	2777
80	20036	9379
75	29308	19520
70	35575	28214
65	40068	34583
60	43565	39472
55	46303	43314
50	48734	46481
45	50818	49132


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 10.450m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.20V I:0.0390A P:8.7900W PF:0.9230 Freq:49.99Hz Lamp Flux:743.796x1 lm		
NAME: ID-R-8W-CC 3000K	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.005	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.05	1.01	.98	1.03	.99	.96	.98	.96	.93	.94	.92	.90	.91	.89	.87	.85
2.0	.93	.86	.81	.91	.85	.80	.87	.82	.78	.84	.80	.76	.80	.77	.74	.72
3.0	.82	.74	.68	.80	.73	.67	.77	.71	.66	.74	.69	.65	.72	.67	.64	.61
4.0	.73	.65	.58	.72	.64	.58	.69	.62	.57	.67	.61	.56	.64	.59	.55	.53
5.0	.65	.57	.50	.64	.56	.50	.62	.55	.50	.60	.54	.49	.58	.53	.48	.46
6.0	.59	.50	.44	.58	.50	.44	.56	.49	.44	.54	.48	.43	.53	.47	.43	.41
7.0	.54	.45	.39	.53	.45	.39	.51	.44	.39	.50	.43	.38	.48	.42	.38	.36
8.0	.49	.41	.35	.48	.41	.35	.47	.40	.35	.46	.39	.34	.44	.39	.34	.32
9.0	.45	.37	.32	.45	.37	.32	.43	.36	.31	.42	.36	.31	.41	.35	.31	.29
10.0	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.38	.32	.28	.27

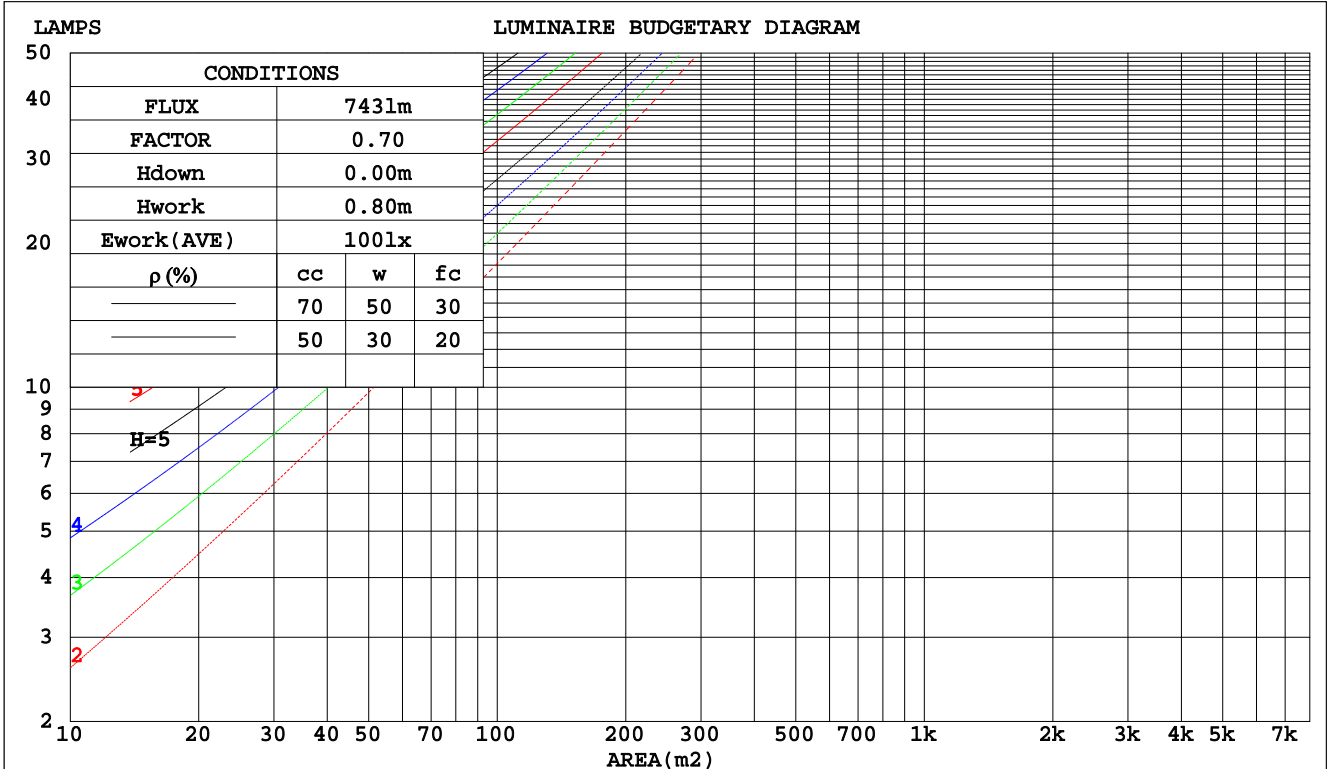

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:10.450m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.20V I:0.0390A P:8.7900W PF:0.9230 Freq:49.99Hz Lamp Flux:743.796x1 lm		
NAME: ID-R-8W-CC 3000K	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.005	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.277	.158	.050	.270	.154	.049	.256	.147	.047	.243	.140	.045	.232	.134	.043	
2.0	.268	.147	.045	.261	.144	.044	.249	.139	.043	.238	.134	.042	.228	.129	.041	
3.0	.252	.134	.040	.246	.132	.040	.235	.127	.039	.225	.123	.038	.216	.120	.037	
4.0	.235	.122	.036	.230	.120	.036	.220	.117	.035	.211	.113	.034	.203	.110	.034	
5.0	.219	.112	.032	.214	.110	.032	.206	.107	.032	.198	.104	.031	.191	.102	.031	
6.0	.204	.102	.029	.200	.101	.029	.193	.099	.029	.186	.096	.028	.179	.094	.028	
7.0	.191	.094	.027	.187	.093	.027	.181	.091	.026	.174	.089	.026	.168	.087	.026	
8.0	.179	.088	.025	.176	.087	.024	.170	.085	.024	.164	.083	.024	.159	.081	.024	
9.0	.168	.081	.023	.166	.081	.023	.160	.079	.022	.155	.078	.022	.150	.076	.022	
10.0	.159	.076	.021	.156	.075	.021	.151	.074	.021	.146	.073	.021	.142	.071	.020	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.200	.200	.200	.171	.171	.171	.117	.117	.117	.067	.067	.067	.021	.021	.021	
1.0	.188	.166	.146	.160	.142	.126	.110	.098	.087	.063	.057	.051	.020	.018	.016	
2.0	.179	.142	.110	.153	.122	.095	.105	.084	.067	.060	.049	.039	.019	.016	.013	
3.0	.171	.124	.086	.146	.107	.075	.100	.074	.053	.058	.043	.031	.019	.014	.010	
4.0	.163	.110	.070	.140	.095	.061	.096	.066	.043	.056	.039	.025	.018	.013	.008	
5.0	.156	.100	.059	.134	.086	.051	.092	.060	.036	.053	.035	.021	.017	.012	.007	
6.0	.149	.091	.050	.128	.079	.044	.088	.055	.031	.051	.033	.018	.017	.011	.006	
7.0	.142	.084	.044	.122	.073	.038	.085	.051	.027	.049	.030	.016	.016	.010	.005	
8.0	.136	.079	.039	.117	.068	.034	.081	.048	.024	.047	.028	.014	.015	.009	.005	
9.0	.130	.074	.036	.112	.064	.031	.078	.045	.022	.045	.027	.013	.015	.009	.004	
10.0	.125	.069	.033	.107	.060	.029	.075	.042	.020	.043	.025	.012	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:10.450m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.20V I:0.0390A P:8.7900W PF:0.9230 Freq:49.99Hz										
Lamp Flux:743.796x1 lm										
NAME: ID-R-8W-CC 3000K					TYPE: 8W			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.:		
MFR.:					SUR.: 0.005			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.0	27.5	26.3	27.7	27.9	25.7	27.2	26.0	27.4	27.6
3H	27.2	28.6	27.6	28.8	29.1	26.7	28.0	27.0	28.3	28.5
4H	27.6	28.9	28.0	29.2	29.4	26.9	28.2	27.3	28.5	28.7
6H	27.8	29.0	28.1	29.3	29.6	27.0	28.1	27.3	28.4	28.7
8H	27.8	28.9	28.2	29.2	29.5	26.9	28.0	27.3	28.3	28.7
12H	27.8	28.9	28.1	29.2	29.5	26.9	28.0	27.2	28.3	28.6
4H 2H	26.5	27.7	26.8	28.0	28.3	26.3	27.5	26.6	27.8	28.1
3H	27.8	28.9	28.2	29.2	29.6	27.4	28.5	27.8	28.8	29.1
4H	28.3	29.3	28.7	29.6	30.0	27.7	28.7	28.1	29.0	29.4
6H	28.6	29.4	29.0	29.8	30.2	27.7	28.6	28.2	29.0	29.4
8H	28.6	29.4	29.0	29.8	30.2	27.7	28.5	28.1	28.9	29.3
12H	28.6	29.3	29.0	29.7	30.1	27.7	28.4	28.1	28.8	29.2
8H 4H	28.4	29.2	28.8	29.6	30.0	27.8	28.6	28.2	29.0	29.4
6H	28.7	29.3	29.1	29.8	30.2	27.9	28.6	28.4	29.0	29.4
8H	28.7	29.3	29.2	29.8	30.2	27.9	28.5	28.4	28.9	29.4
12H	28.7	29.2	29.2	29.7	30.2	27.9	28.4	28.4	28.8	29.3
12H 4H	28.4	29.1	28.8	29.5	29.9	27.8	28.5	28.2	28.9	29.3
6H	28.7	29.2	29.1	29.7	30.2	27.9	28.5	28.4	28.9	29.4
8H	28.7	29.2	29.2	29.7	30.2	27.9	28.4	28.4	28.9	29.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.3					+ 0.3 / - 0.4				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.5				

CIE Pub.117, 743.8 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.0)
 Area: 0.005 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:10.450m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.20V I:0.0390A P:8.7900W PF:0.9230 Freq:49.99Hz Lamp Flux:743.796x1 lm		
NAME: ID-R-8W-CC 3000K	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.005	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	60	49	42	59	49	42	58	48	42	36
0.80	70	59	52	69	59	52	67	58	52	45
1.00	79	68	61	77	68	61	75	69	60	54
1.25	86	76	69	84	75	69	81	74	68	61
1.50	90	81	75	89	80	74	86	78	73	66
2.00	97	89	83	95	88	82	92	86	81	73
2.50	101	93	88	98	92	87	95	89	85	77
3.00	104	97	92	102	96	91	97	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	102	99	97	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:10.450m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.20V I:0.0390A P:8.7900W PF:0.9230 Freq:49.99Hz Lamp Flux:743.796x1 lm		
NAME: ID-R-8W-CC 3000K	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.005	Shielding Angle:

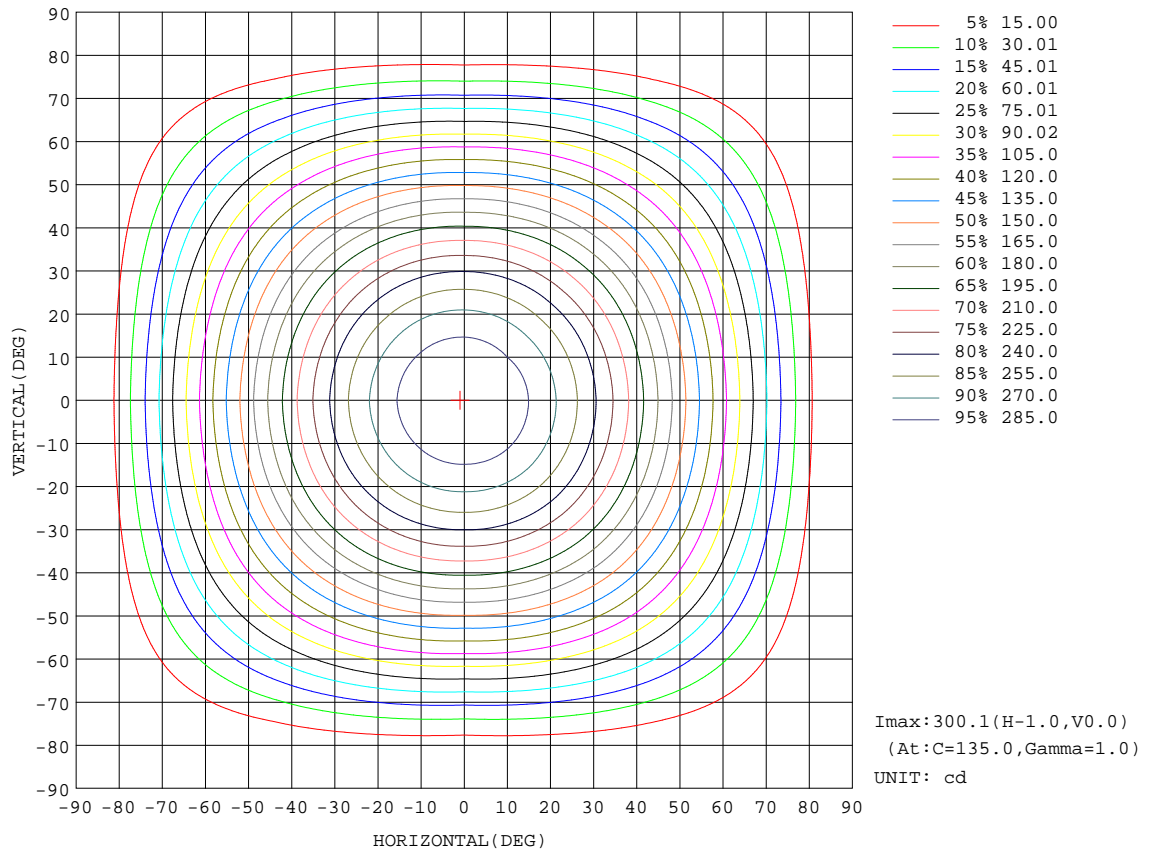


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 10.450m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.20V I:0.0390A P:8.7900W PF:0.9230 Freq:49.99Hz Lamp Flux:743.796x1 lm		
NAME: ID-R-8W-CC 3000K	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.005	Shielding Angle:

Flux out:618.1 lm

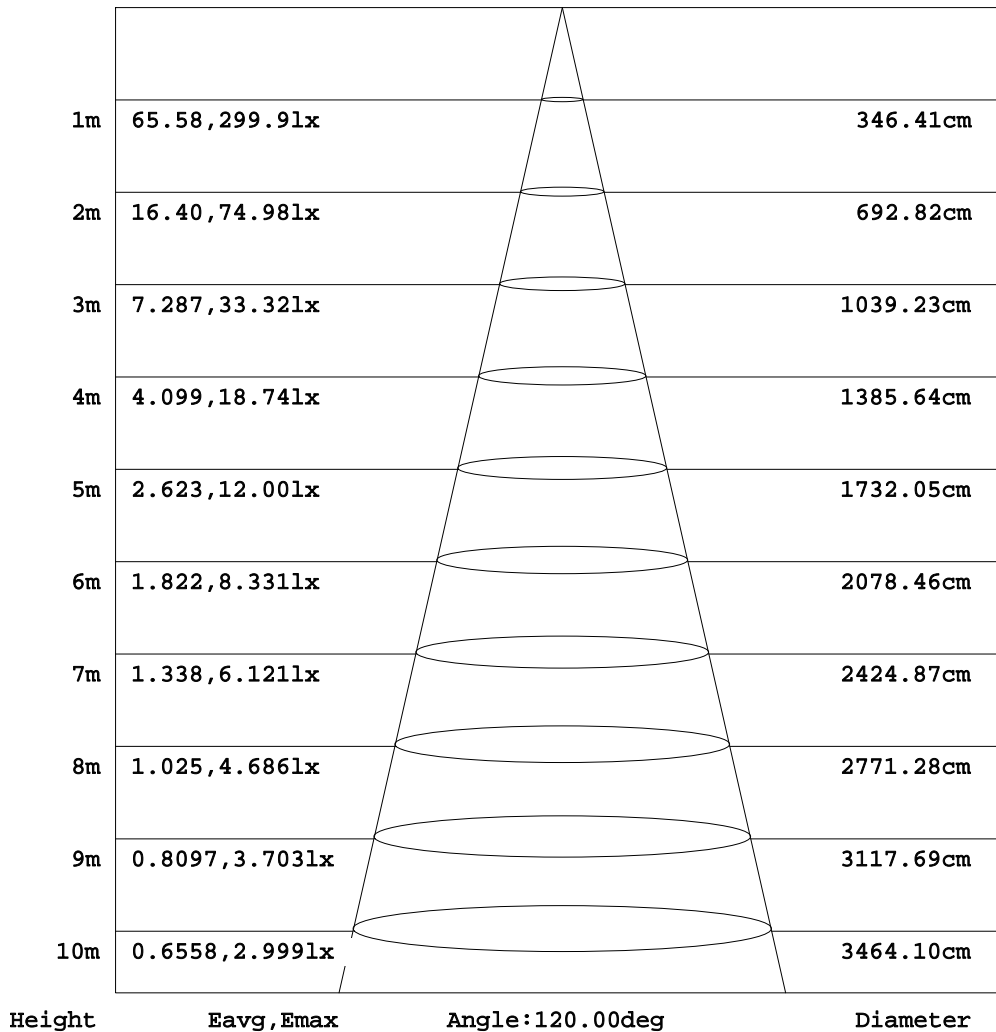


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:10.450m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:240.20V I:0.0390A P:8.7900W PF:0.9230 Freq:49.99Hz Lamp Flux:743.796x1 lm		
NAME: ID-R-8W-CC 3000K	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.005	Shielding Angle:

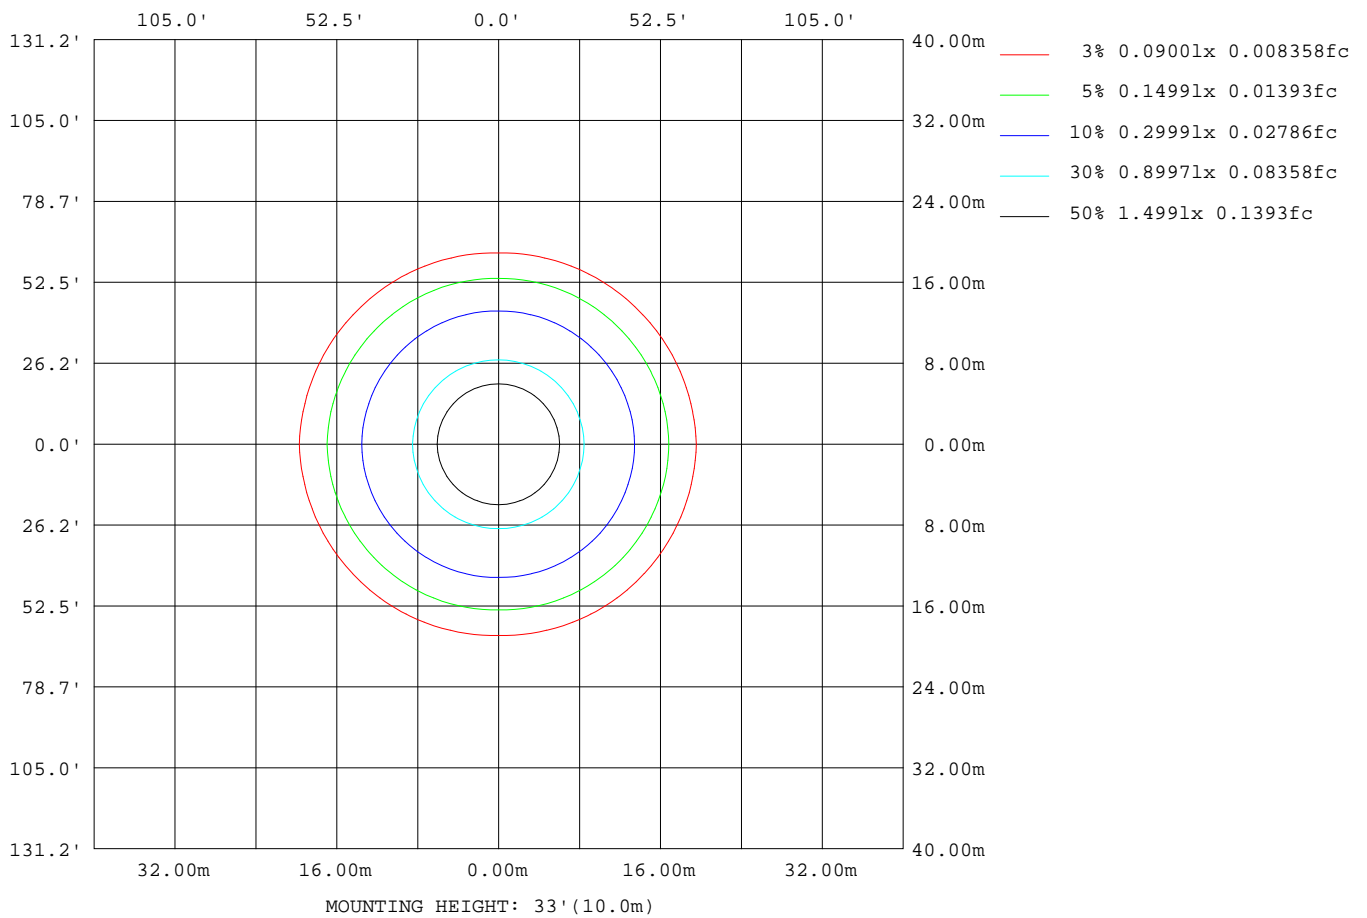

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:10.450m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.20V I:0.0390A P:8.7900W PF:0.9230 Freq:49.99Hz Lamp Flux:743.796x1 lm		
NAME: ID-R-8W-CC 3000K	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.005	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	40669
L_0~180(75)av	30240
L_0~180(85)av	10552
L_90~270(65)av	34604
L_90~270(75)av	19622
L_90~270(85)av	2909
L_45(65)av	37385
L_45(75)av	23942
L_45(85)av	4910

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:10.450m [K=1.0000]
 Remarks:

Planar Illuminance Curve

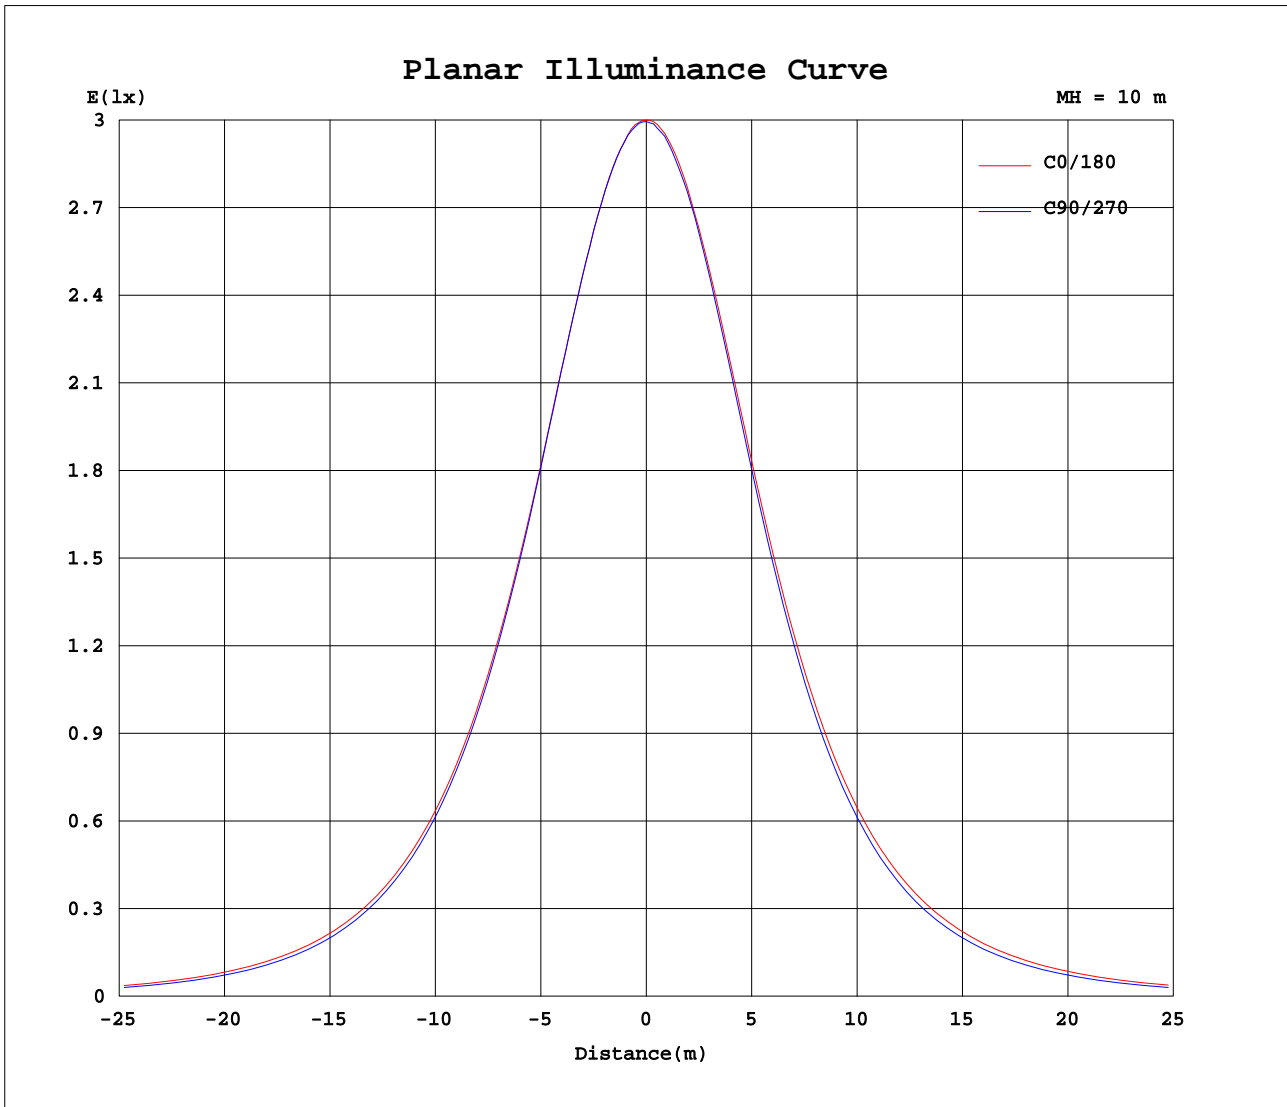

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 10.450m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.20V I:0.0390A P:8.7900W PF:0.9230 Freq:49.99Hz Lamp Flux:743.796x1 lm		
NAME: ID-R-8W-CC 3000K	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.005	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	45	90	135	180	225	270	315											
0	299	299	299	299	299	299	299	299											
5	298	298	298	298	298	298	298	298											
10	292	293	293	294	294	293	292	292											
15	284	285	285	286	286	285	284	284											
20	273	274	273	275	275	273	272	273											
25	259	259	258	260	261	259	257	258											
30	242	242	240	243	244	241	239	240											
35	223	222	220	223	225	222	219	220											
40	202	201	198	202	204	200	196	199											
45	179	178	174	179	182	177	173	176											
50	156	154	149	155	159	153	149	152											
55	133	129	124	130	136	129	124	128											
60	109	104	98.6	105	112	104	98.4	103											
65	84.5	79.3	73.0	79.9	87.4	79.0	73.2	77.7											
70	60.7	54.8	48.2	55.0	63.5	54.4	48.3	53.4											
75	37.9	31.4	25.3	31.3	40.4	31.0	25.5	30.2											
80	17.4	11.6	8.14	11.5	19.4	11.3	8.40	11.0											
85	4.32	2.25	1.21	2.13	4.88	2.10	1.33	2.07											
90	0.28	0.45	0.20	0.24	0.23	0.21	0.18	0.22											
95	0.43	0.38	0.35	0.38	0.34	0.34	0.30	0.29											
100	0.59	0.57	0.49	0.57	0.50	0.42	0.43	0.43											
105	0.79	0.77	0.69	0.76	0.69	0.59	0.61	0.60											
110	1.02	1.00	0.92	0.99	0.88	0.81	0.78	0.82											
115	1.27	1.25	1.16	1.18	1.14	1.02	1.03	1.02											
120	1.53	1.48	1.42	1.46	1.37	1.27	1.26	1.26											
125	1.80	1.72	1.66	1.68	1.54	1.48	1.47	1.51											
130	2.03	1.95	1.92	1.90	1.76	1.71	1.68	1.70											
135	2.18	2.18	2.00	2.12	1.98	1.89	1.91	1.92											
140	2.42	2.39	2.17	2.34	2.20	2.09	2.15	2.07											
145	2.45	2.57	2.40	2.52	2.38	2.22	2.33	2.30											
150	2.79	2.73	2.78	2.68	2.51	2.44	2.49	2.46											
155	2.92	2.90	2.96	2.87	2.64	2.55	2.70	2.59											
160	3.00	3.03	3.12	3.00	2.77	2.68	2.77	2.73											
165	3.13	3.12	3.24	3.09	2.90	2.88	2.90	2.89											
170	3.12	3.22	3.15	3.17	3.04	2.99	3.02	2.99											
175	3.23	3.30	3.19	3.25	3.14	3.11	3.12	3.12											
180	3.25	3.33	3.27	3.31	3.26	3.35	3.26	3.33											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:10.450m [K=1.0000]
 Remarks: