




POWER-LITE®

Certainty at The Speed of Light

BOLT PATTERN - 4 X M20 X 233 PCD
SOIL TYPE FIRM AS DEFINED IN AS/NZS 4676:2000 APP.12
DAMP CLAYS, SANDY CLAYS, DAMP SANDS
 $f_b > 100\text{KPa}$
MAXIMUM ULTIMATE BASE MOMENT - 10.1kNm
MAXIMUM BASE SHEAR 2.4 kN

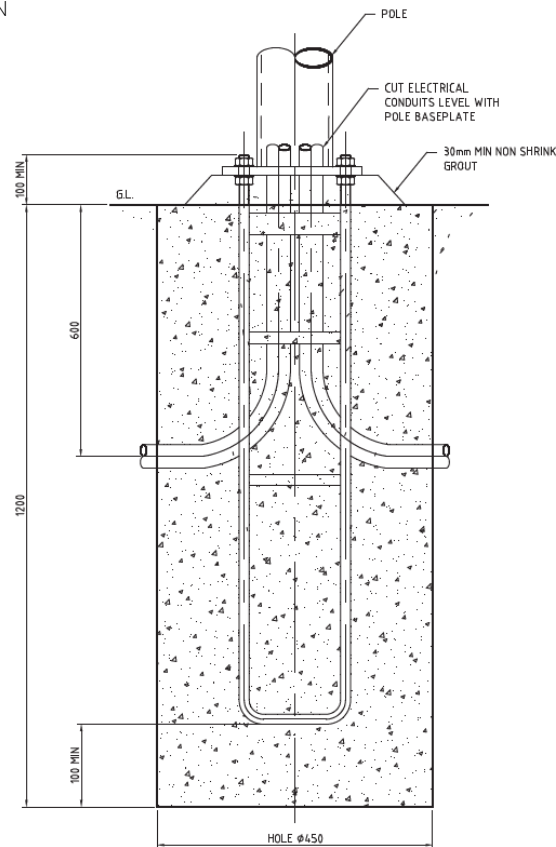

CAGE FOR 4m, 6m & 8m LIGHTING

POLE

PL-POLE-CAGE

Cage to suit our POWER-LITE Lighting Poles.



☎ 1800 909 306
🌐 nedlandsgroup.com.au
✉ sales@nedlandsgroup.com.au



POWER-LITE®

Certainty at The Speed of Light

INSTALLATION & DETAILS

1. TO BE USED AS A GUIDE ONLY. ALL PILE SPECIFICATIONS SHALL BE CONFIRMED WITH AN APPROPRIATELY QUALIFIED ENGINEER PRIOR TO CONSTRUCTION
2. ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH THE CURRENT SAA CODE AS3600 PILING - DESIGN AND INSTALLATION - WITH AMENDMENTS
3. ALL CONCRETE TO HAVE A MINIMUM CHARACTERISTIC STRENGTH OF 32MPA OR 40MPA WHERE AN EXPOSURE CLASSIFICATION OF MODERATE IS DETERMINED IN ACCORDANCE WITH AS2159 - PILING AND INSTALLATION
4. MINIMUM CLEAR CONCRETE COVER TO BE 65MM
5. ALL CONCRETE TO BE PLACED AND VIBRATED TO OPTIMUM COMPACTION
6. PILE CASINGS TO BE USED FOR CONSTRUCTION WHERE REQUIRED
7. ENGINEERING ADVICE IS TO BE SOUGHT WHERE SOILS ARE ASSESSED TO BE OF EXPOSURE CLASSIFICATIONS SEVERE OR GREATER AS DETERMINED IN ACCORDANCE WITH AS2159
8. SOIL CLASSIFICATION TO BE CONFIRMED BY A GEOTECHNICAL ENGINEER

PRODUCT

CODE

LIGHTING POLE CAGE

PL-POLE-CAGE

ACCESSORIES

CODE

LIGHTING POLE CAGE LINER



Material
Steel



1200mm x
450mm

PL-CAGE-LINER