




# POWER-LITE®

Certainty at The Speed of Light

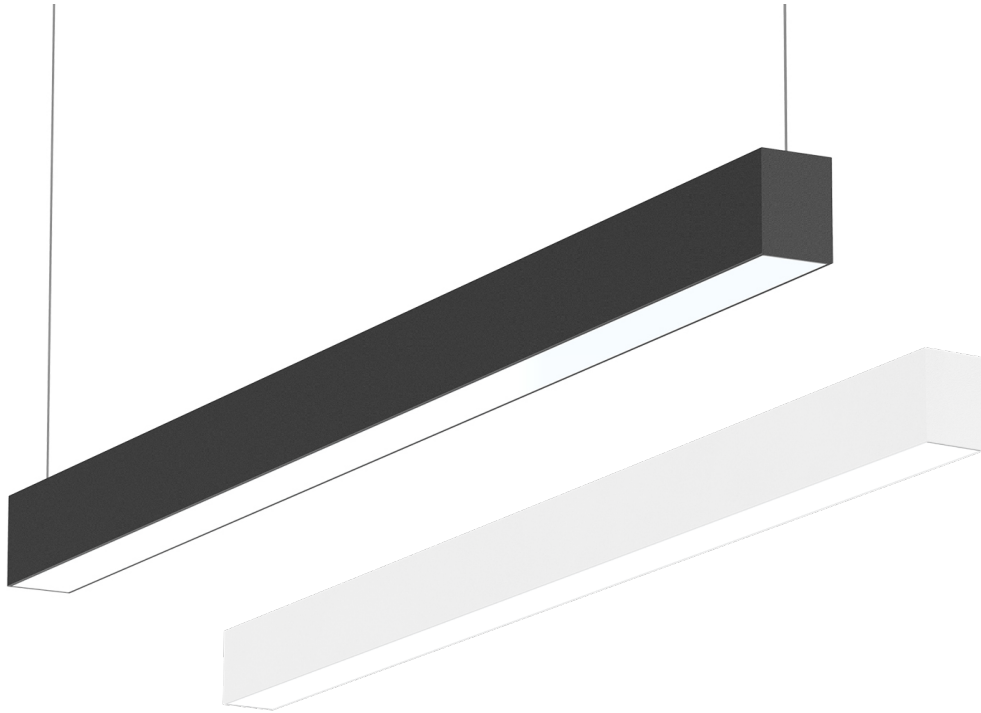

## LED LINEAR

**LIGHT**

LL

The POWER-LITE® LED Linear Light provides a low glare lighting solution whilst achieving excellent lux levels and uniformity.



### APPLICATIONS

Domestic | Retail  
Commercial  
Office  
Recreation





☎ 1800 909 306  
🌐 [nedlandsgroup.com.au](http://nedlandsgroup.com.au)  
✉ [sales@nedlandsgroup.com.au](mailto:sales@nedlandsgroup.com.au)




# POWER-LITE®

Certainty at The Speed of Light

## DIMENSIONS (mm)

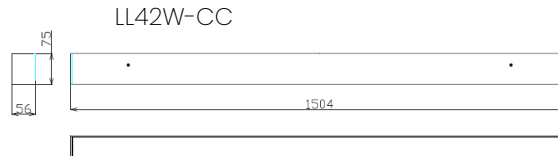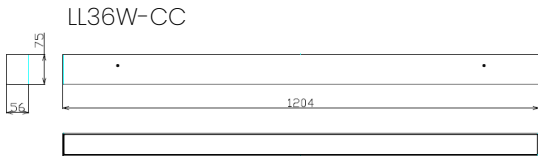

## INSTALLATION PHOTOS

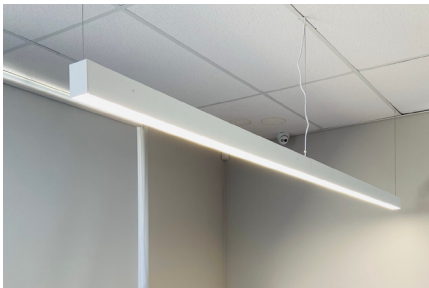

**LED Chip**  
Epistar 2835 SMD

**Life Expectancy**  
50,000 hrs TM-21

**Working Temp**  
-20°C to +45°C

**SCDM**  
<6 Macadam steps

**CRI**  
>80

**UGR**  
<19

**Efficacy**  
Up to 110lm/W

**LED Driver**  
Boke 0 to 10V Dimmable  
Built-in

**Diffuser**  
Opal

**Material**  
PC & Aluminium

**Installation Types**  
Pendant  
Surface Mounted  
Wall Mounted

**Carton Qty**  
6



## PRODUCT

## SPECIFICATIONS

## CODE

LED LINEAR LIGHT

36W

3000K  
3529lm

4000K  
3868lm

5700K  
3755lm

Black

White

LL36W-CC-B

LL36W-CC-W

42W

3000K  
4179lm

4000K  
4590lm


5700K  
4468lm

Black

White

LL42W-CC-B

LL42W-CC-W





# POWER-LITE®


Certainty at The Speed of Light

## ACCESSORIES

## CODE

### MOUNTING OPTIONS

#### SURFACE MOUNTING KIT




3 pcs

2 pcs

2 pcs

LL-SMK

#### WALL MOUNTING KIT

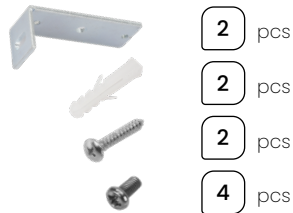

2 pcs

2 pcs

2 pcs

4 pcs

Black

White

LL-WMK

LL-WMK-W

#### PENDANT CABLE SUSPENSION KIT



5M

1M


Black

White

LL-CSK-B-5M

LL-CSK-W

#### LINEAR CONNECTORS



1 pc

1 pc

2 pcs

Black

White

LL-CC

LL-CC-W

#### CORNER

#### STRAIGHT



1 pc


Black

White

LL-SC

LL-SC-W

#### 4 WAY CONNECTOR



1 pc

1 pc

4 pcs


Black

White

LL-4WC

LL-4WC-W

#### TEE CONNECTOR

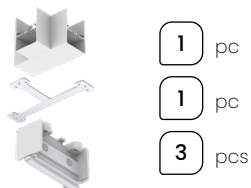

1 pc

1 pc

3 pcs

Black

White

LL-TC-B

LL-TC-W




# POWER-LITE®


Certainty at The Speed of Light

## PHOTOMETRICS


LL36W-CC | 3000K

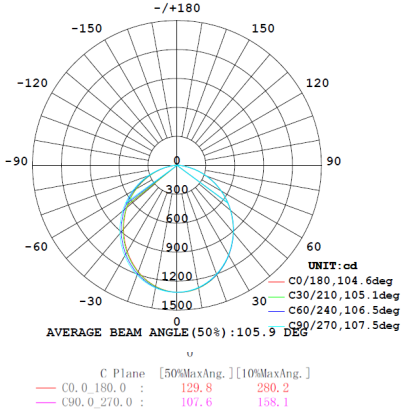


LL36W-CC | 4000K

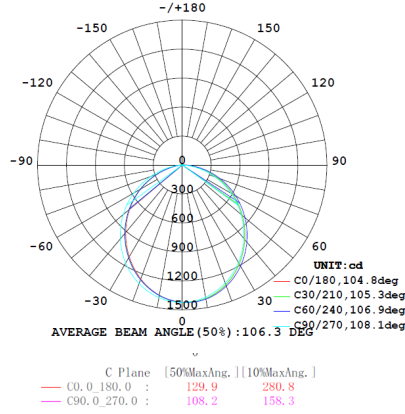


LL36W-CC | 5700K

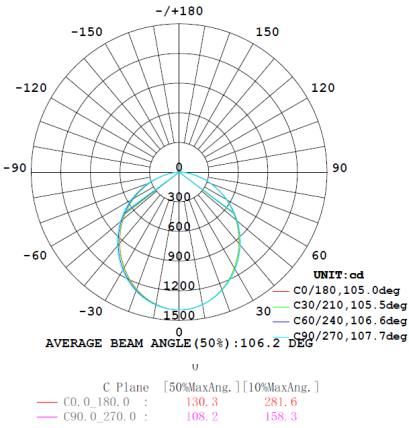

LL42W-CC | 3000K

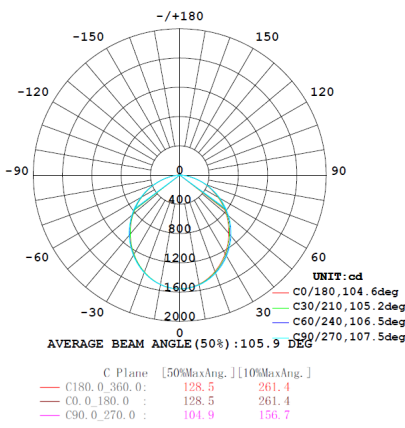

LL42W-CC | 4000K

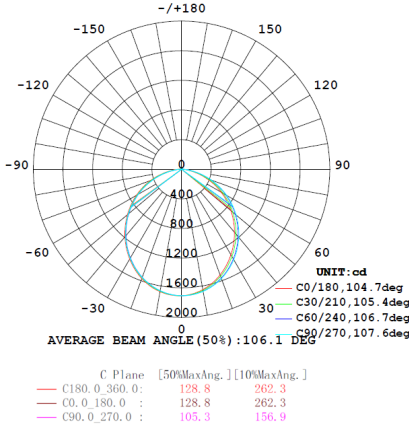

LL42W-CC | 5700K

