
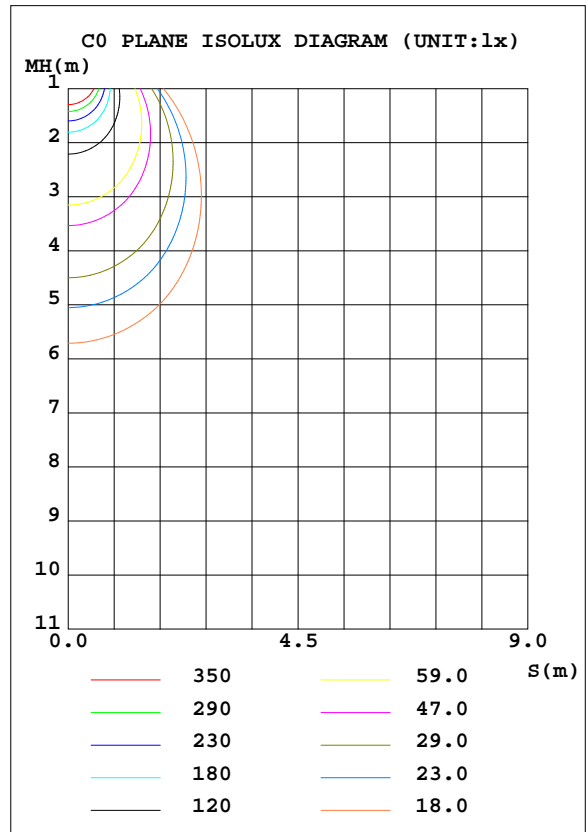


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.25V I:0.0565A P:11.646W PF:0.8949 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1344.37x1 lm		
NAME: D12W-CC 4000K	TYPE: 12W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 115.44 lm/W			
MODEL	D12W-CC 4000K	I _{max} (cd)	586.9	S/MH(C0/180)	1.20
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.17
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	1344.4	η UP, DN(C0-180)	0.4,49.8
NOMINAL FLUX(lm)	1344.37	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.4,49.4
LAMPS INSIDE	1	η up(%)	0.8	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230	η down(%)	99.2	CIBSE SHR MAX	1.30

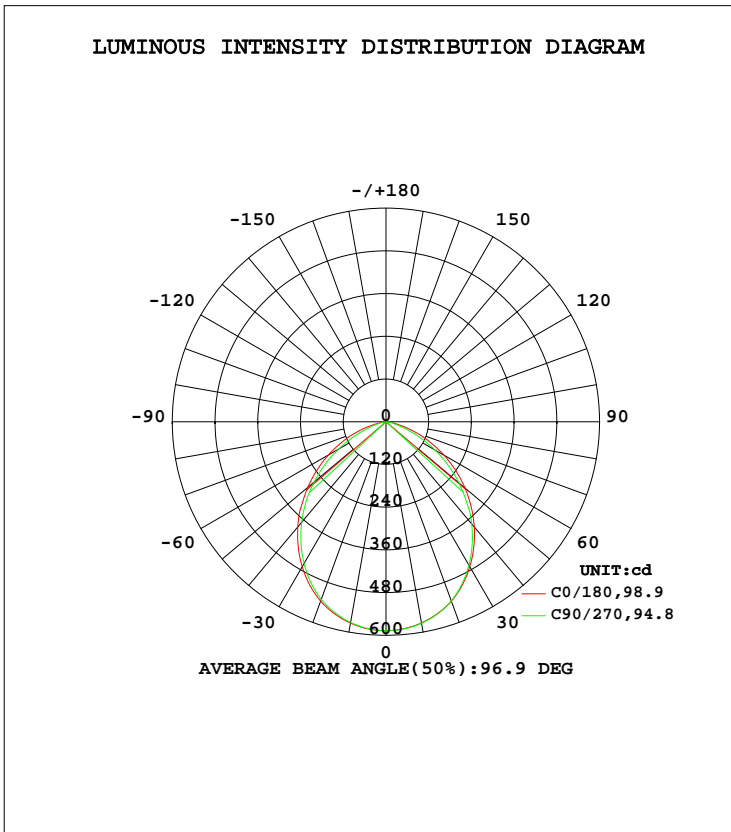

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270				γ	Φ zone	Φ total	%lum,lamp
10	573.8	574.9	574.4	572.7				0- 10	55.41	55.41	4.12,4.12
20	536.5	536.0	536.6	531.6				10- 20	157.2	212.6	15.8,15.8
30	470.6	465.6	470.4	460.3				20- 30	231.8	444.5	33.1,33.1
40	386.0	374.7	385.5	368.5				30- 40	265.2	709.7	52.8,52.8
50	289.9	267.6	286.7	263.9				40- 50	253.2	962.9	71.6,71.6
60	188.6	158.6	186.8	153.6				50- 60	200.6	1163	86.5,86.5
70	90.97	59.76	92.04	56.78				60- 70	120.2	1284	95.5,95.5
80	21.50	13.60	20.71	12.53				70- 80	42.96	1327	98.7,98.7
90	0.3238	0.1839	0.2004	0.1568				80- 90	6.956	1334	99.2,99.2
100	0.5338	0.4738	0.5129	0.3505				90-100	0.3442	1334	99.2,99.2
110	1.036	0.9474	0.9858	0.8017				100-110	0.7336	1335	99.3,99.3
120	1.647	1.526	1.543	1.386				110-120	1.213	1336	99.4,99.4
130	2.238	2.156	2.127	2.004				120-130	1.626	1338	99.5,99.5
140	2.806	2.746	2.690	2.550				130-140	1.865	1339	99.6,99.6
150	3.284	3.286	3.213	3.107				140-150	1.861	1341	99.8,99.8
160	3.703	3.748	3.647	3.586				150-160	1.594	1343	99.9,99.9
170	4.009	4.032	3.992	3.915				160-170	1.086	1344	100,100
180	4.159	4.154	4.165	4.160				170-180	0.3881	1344	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

0 - 45 DEG Zonal Flux:840.73 %lum: 62.5%

0 - 60 DEG Zonal Flux:1163.5 %lum: 86.5%

All measured values may vary less than 35 %

from the average measured value in the 0 to 130 deg. zone: 11.1%

All measured values in the 0 to 130 deg. zone


may vary less than 50% from the average value of itself: 16.0%

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.25V I:0.0565A P:11.646W PF:0.8949 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1344.37x1 lm		
NAME: D12W-CC 4000K	TYPE: 12W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

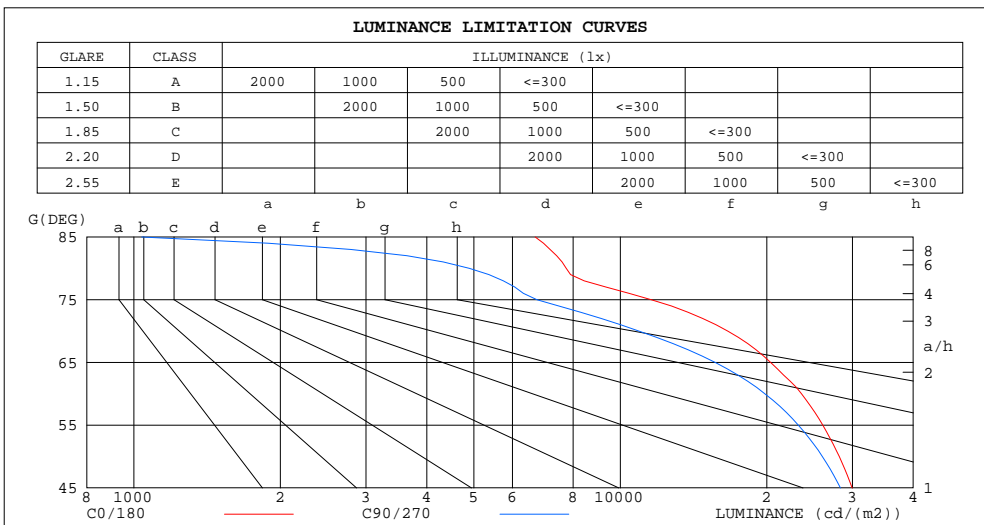

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	6683	1038
80	7739	4896
75	11579	6741
70	16626	10919
65	20379	15669
60	23574	19824
55	26080	23227
50	28189	26020
45	29963	28340


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.25V I:0.0565A P:11.646W PF:0.8949 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1344.37x1 lm		
NAME: D12W-CC 4000K	TYPE: 12W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.06	1.02	.99	1.04	1.00	.97	.99	.97	.94	.95	.93	.91	.92	.90	.88	.86
2.0	.94	.88	.83	.92	.87	.82	.88	.84	.80	.85	.81	.78	.82	.79	.76	.74
3.0	.84	.76	.70	.82	.75	.70	.79	.73	.68	.76	.71	.67	.74	.69	.66	.64
4.0	.75	.67	.60	.73	.66	.60	.71	.64	.59	.68	.63	.58	.66	.61	.57	.55
5.0	.67	.59	.53	.66	.58	.52	.64	.57	.52	.62	.56	.51	.60	.55	.51	.49
6.0	.61	.52	.46	.60	.52	.46	.58	.51	.46	.56	.50	.45	.55	.49	.45	.43
7.0	.55	.47	.41	.55	.47	.41	.53	.46	.41	.52	.45	.41	.50	.45	.40	.38
8.0	.51	.43	.37	.50	.42	.37	.49	.42	.37	.47	.41	.36	.46	.41	.36	.34
9.0	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.43	.37	.33	.31
10.0	.43	.36	.31	.43	.35	.31	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28

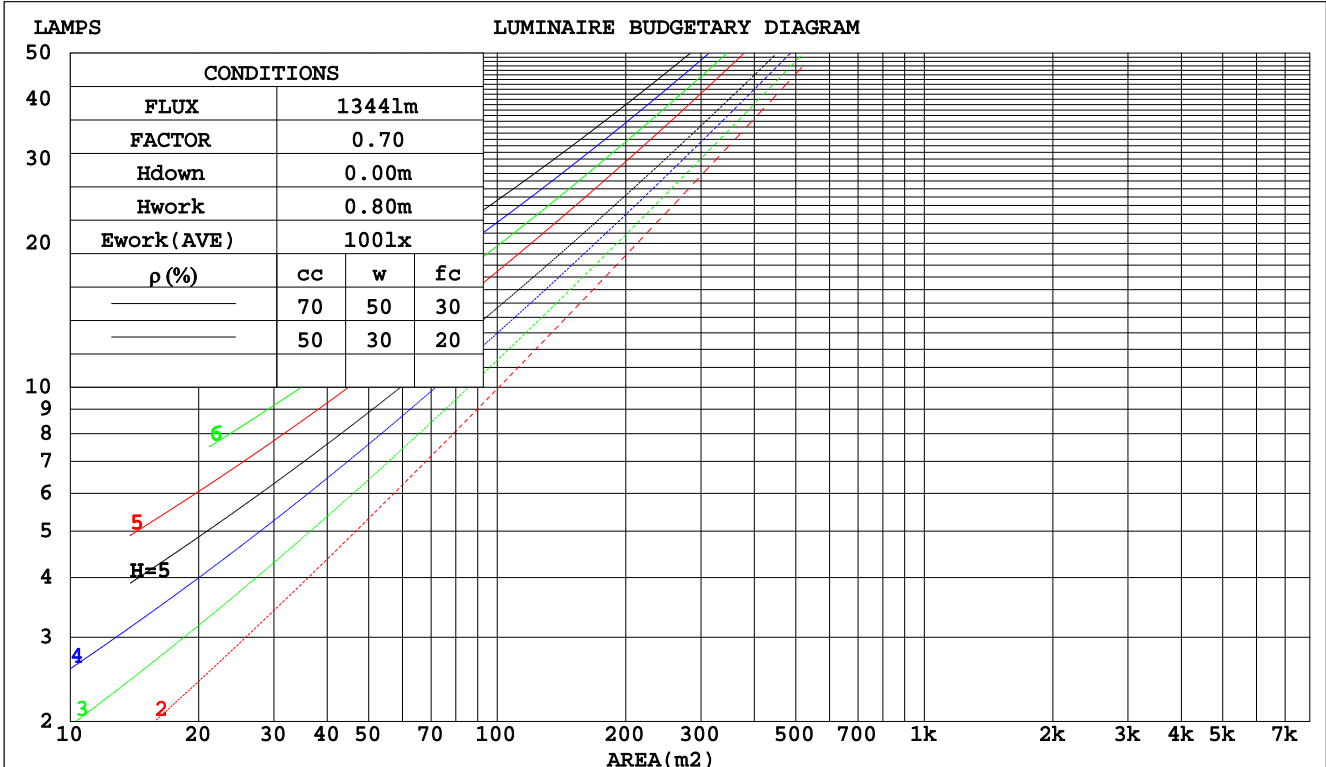

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:230.25V I:0.0565A P:11.646W PF:0.8949 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1344.37x1 lm		
NAME: D12W-CC 4000K	TYPE: 12W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.264	.150	.048	.257	.147	.047	.244	.140	.045	.231	.133	.043	.220	.127	.041	
2.0	.256	.140	.043	.250	.138	.042	.238	.132	.041	.227	.127	.040	.217	.123	.039	
3.0	.242	.129	.039	.236	.127	.038	.226	.122	.037	.216	.119	.036	.207	.115	.036	
4.0	.227	.118	.035	.222	.116	.034	.213	.113	.034	.204	.110	.033	.196	.107	.032	
5.0	.212	.108	.031	.208	.107	.031	.200	.104	.031	.192	.101	.030	.185	.099	.030	
6.0	.199	.100	.029	.195	.098	.028	.188	.096	.028	.181	.094	.028	.174	.092	.027	
7.0	.187	.092	.026	.183	.091	.026	.177	.089	.026	.170	.087	.025	.165	.086	.025	
8.0	.175	.086	.024	.172	.085	.024	.166	.083	.024	.161	.081	.024	.156	.080	.023	
9.0	.165	.080	.022	.162	.079	.022	.157	.078	.022	.152	.076	.022	.147	.075	.022	
10.0	.156	.075	.021	.154	.074	.021	.149	.073	.021	.144	.072	.020	.140	.070	.020	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.197	.197	.197	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.183	.163	.144	.157	.140	.124	.107	.096	.086	.062	.056	.050	.020	.018	.016	
2.0	.174	.138	.108	.149	.119	.094	.102	.082	.065	.059	.048	.038	.019	.015	.012	
3.0	.165	.120	.084	.142	.104	.073	.097	.072	.051	.056	.042	.030	.018	.014	.010	
4.0	.158	.107	.068	.135	.092	.059	.093	.064	.042	.054	.038	.025	.017	.012	.008	
5.0	.150	.096	.056	.129	.083	.049	.089	.058	.034	.052	.034	.020	.017	.011	.007	
6.0	.144	.088	.048	.123	.076	.041	.085	.053	.029	.049	.031	.017	.016	.010	.006	
7.0	.137	.081	.041	.118	.070	.036	.081	.049	.025	.047	.029	.015	.015	.009	.005	
8.0	.131	.075	.036	.113	.065	.032	.078	.046	.022	.045	.027	.013	.015	.009	.004	
9.0	.125	.070	.033	.108	.061	.028	.075	.043	.020	.044	.025	.012	.014	.008	.004	
10.0	.120	.066	.030	.103	.057	.026	.072	.040	.018	.042	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.25V I:0.0565A P:11.646W PF:0.8949 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1344.37x1 lm		
NAME: D12W-CC 4000K	TYPE: 12W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.9	24.3	23.2	24.5	24.7	22.4	23.8	22.7	24.0	24.2
3H	23.8	25.1	24.1	25.3	25.6	23.0	24.3	23.3	24.5	24.8
4H	24.0	25.2	24.3	25.5	25.7	23.1	24.3	23.4	24.5	24.8
6H	24.0	25.2	24.4	25.4	25.7	23.0	24.2	23.4	24.5	24.7
8H	24.0	25.1	24.4	25.4	25.7	23.0	24.1	23.4	24.4	24.7
12H	24.0	25.1	24.4	25.4	25.7	23.0	24.0	23.3	24.3	24.6
4H 2H	23.2	24.4	23.5	24.7	25.0	22.8	24.0	23.1	24.3	24.6
3H	24.2	25.3	24.6	25.6	25.9	23.5	24.6	23.9	24.9	25.2
4H	24.5	25.4	24.9	25.8	26.1	23.6	24.6	24.0	24.9	25.3
6H	24.6	25.4	25.0	25.8	26.2	23.7	24.5	24.1	24.9	25.2
8H	24.6	25.4	25.0	25.8	26.2	23.7	24.4	24.1	24.8	25.2
12H	24.6	25.3	25.0	25.7	26.1	23.6	24.3	24.1	24.7	25.1
8H 4H	24.5	25.3	24.9	25.6	26.0	23.7	24.5	24.1	24.8	25.2
6H	24.6	25.3	25.1	25.7	26.1	23.8	24.4	24.2	24.8	25.3
8H	24.7	25.2	25.1	25.7	26.1	23.8	24.3	24.2	24.8	25.2
12H	24.7	25.2	25.2	25.7	26.1	23.7	24.2	24.2	24.7	25.2
12H 4H	24.5	25.2	24.9	25.6	26.0	23.6	24.4	24.1	24.8	25.2
6H	24.6	25.2	25.1	25.6	26.1	23.7	24.3	24.2	24.7	25.2
8H	24.7	25.1	25.2	25.6	26.1	23.8	24.2	24.2	24.7	25.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.3 / - 0.4					+ 0.5 / - 0.6				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.5				
2.0H	+ 0.7 / - 0.7					+ 0.7 / - 0.8				

CIE Pub.117, 1344 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.0)
Area: 0.016 m2

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-09-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.25V I:0.0565A P:11.646W PF:0.8949 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1344.37x1 lm		
NAME: D12W-CC 4000K	TYPE: 12W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	62	51	45	61	51	45	60	50	44	38
0.80	72	62	55	71	61	55	69	60	54	48
1.00	81	71	64	79	70	64	77	71	63	57
1.25	87	78	72	86	77	71	83	76	71	64
1.50	92	84	77	91	83	77	88	81	76	69
2.00	98	91	85	97	90	85	93	88	83	76
2.50	102	95	90	100	94	89	96	91	87	79
3.00	105	99	94	103	97	93	99	94	91	83
4.00	108	103	99	106	102	98	102	98	95	87
5.00	110	106	103	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.25V I:0.0565A P:11.646W PF:0.8949 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1344.37x1 lm		
NAME: D12W-CC 4000K	TYPE: 12W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

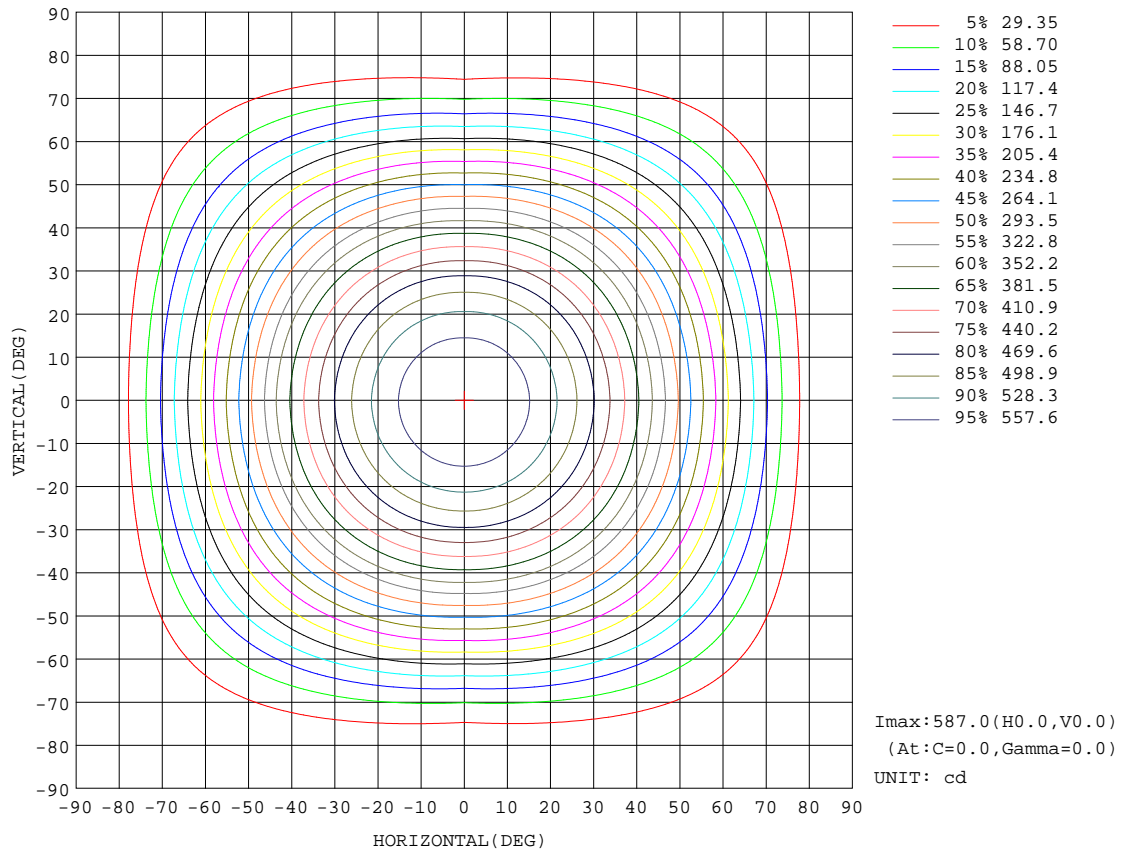


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-09-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.25V I:0.0565A P:11.646W PF:0.8949 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1344.37x1 lm		
NAME: D12W-CC 4000K	TYPE: 12W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

Flux out:1163 lm

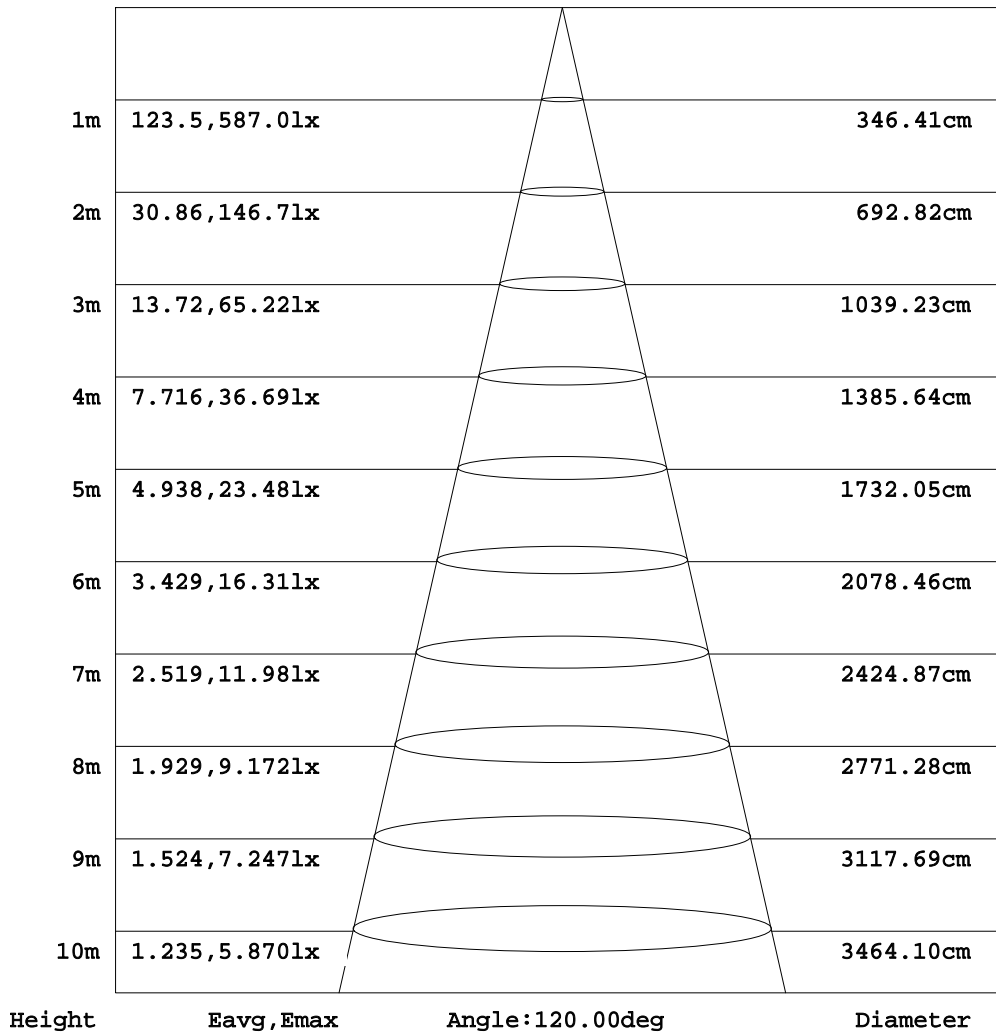


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-09-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 8.690m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.25V I:0.0565A P:11.646W PF:0.8949 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1344.37x1 lm		
NAME: D12W-CC 4000K	TYPE: 12W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

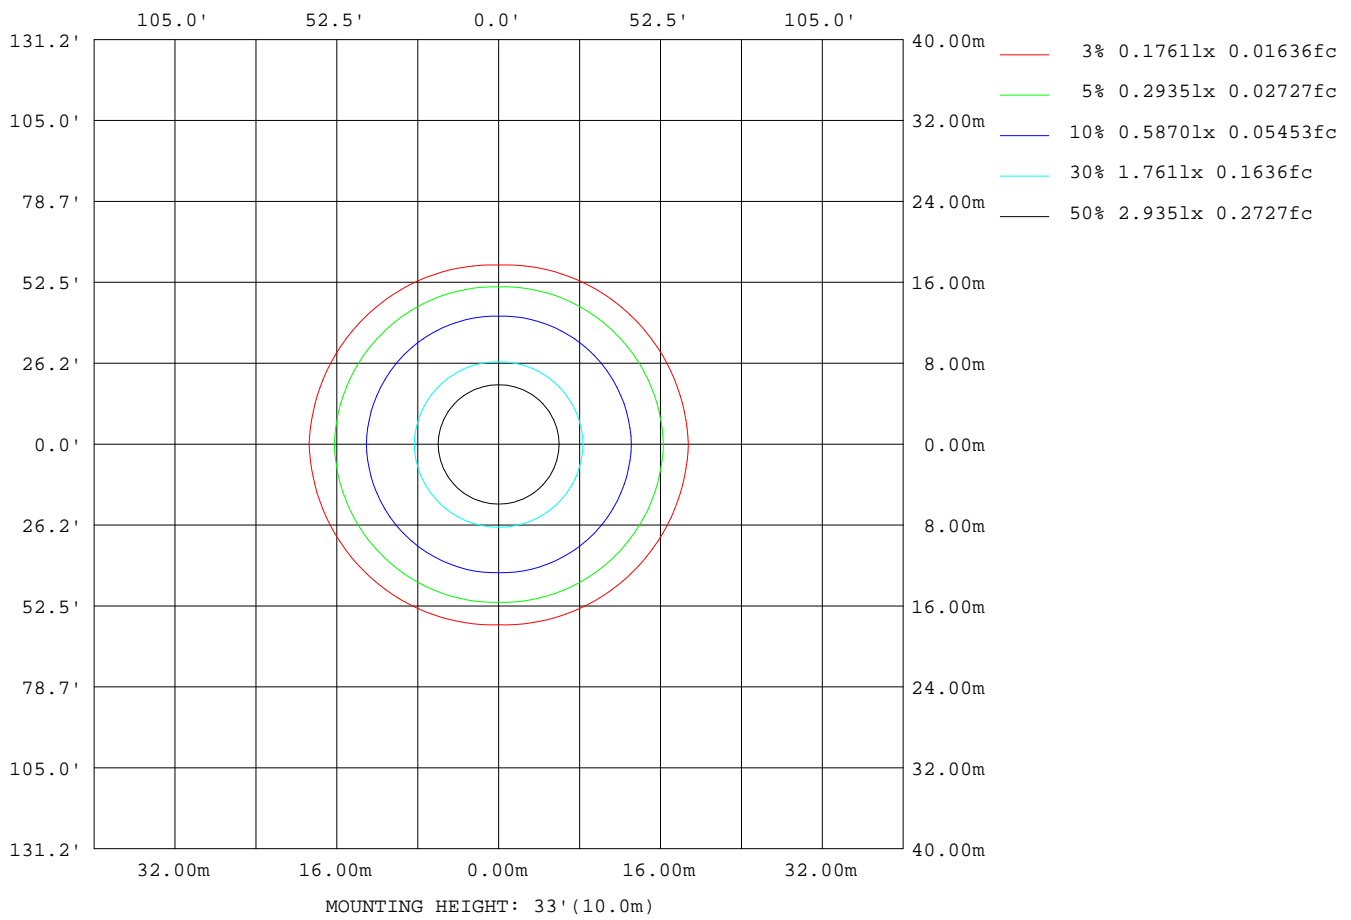

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 8.690m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:230.25V I:0.0565A P:11.646W PF:0.8949 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1344.37x1 lm		
NAME: D12W-CC 4000K	TYPE: 12W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	20415
L_0~180(75)av	11717
L_0~180(85)av	6504
L_90~270(65)av	15367
L_90~270(75)av	6583
L_90~270(85)av	869
L_45(65)av	17262
L_45(75)av	8518
L_45(85)av	2971

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

Planar Illuminance Curve

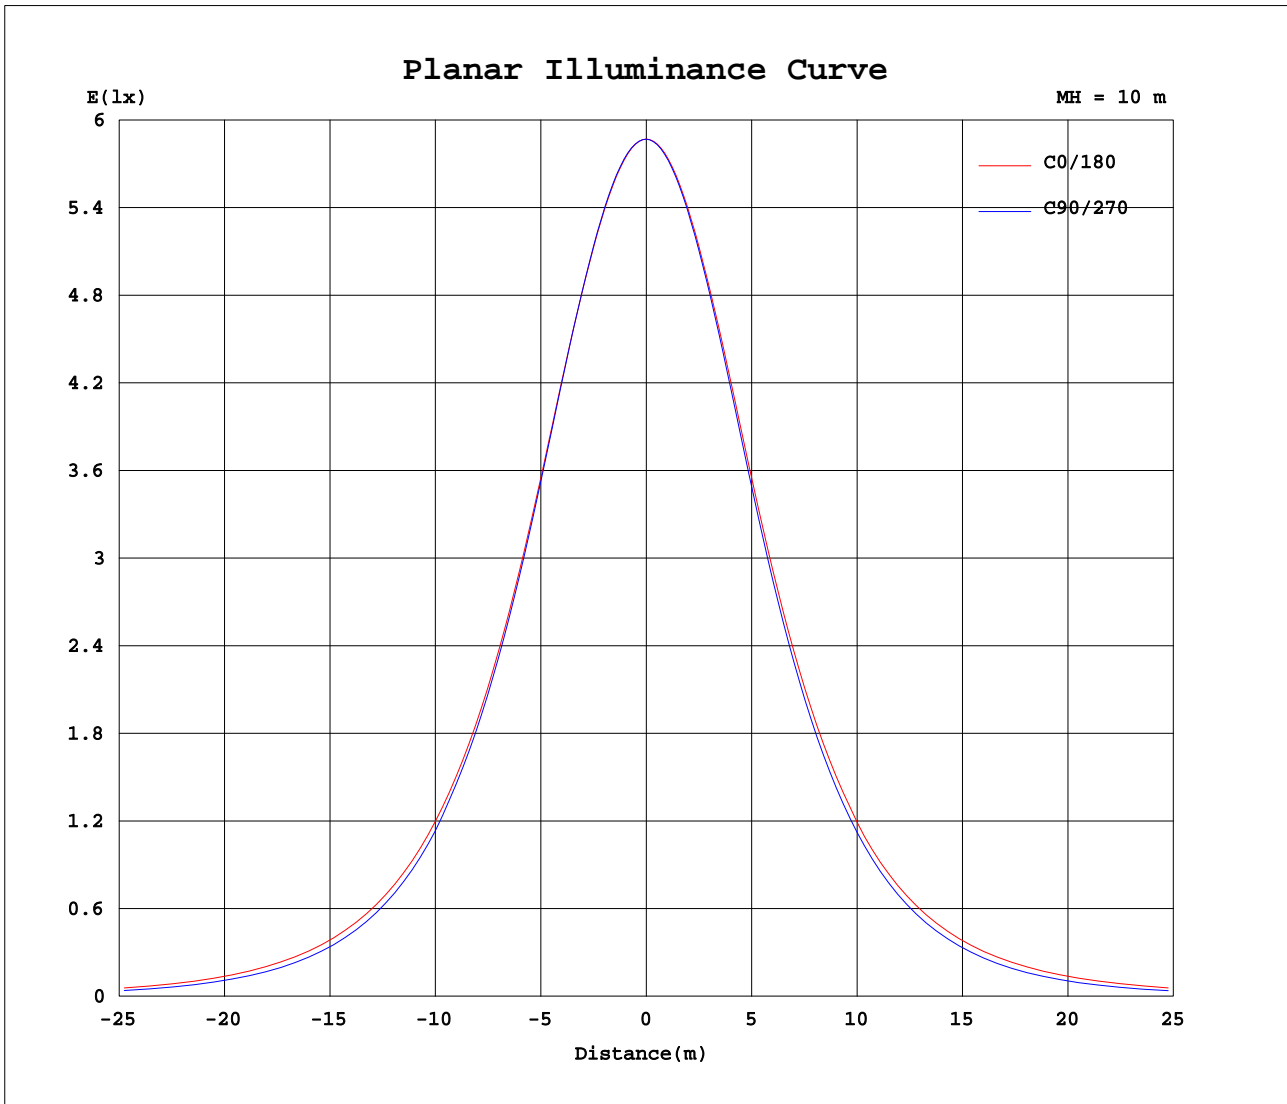

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 8.690m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.25V I:0.0565A P:11.646W PF:0.8949 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1344.37x1 lm		
NAME: D12W-CC 4000K	TYPE: 12W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	90	180	270															
0	587	587	587	587															
5	583	584	584	583															
10	574	575	574	573															
15	558	559	559	556															
20	537	536	537	532															
25	507	504	506	499															
30	471	466	470	460															
35	430	422	430	416															
40	386	375	386	368															
45	339	321	337	317															
50	290	268	287	264															
55	239	213	237	209															
60	189	159	187	154															
65	138	106	138	102															
70	91.0	59.8	92.0	56.8															
75	47.9	27.9	49.1	26.6															
80	21.5	13.6	20.7	12.5															
85	9.32	1.45	8.82	0.98															
90	0.32	0.18	0.20	0.16															
95	0.34	0.32	0.33	0.21															
100	0.53	0.47	0.51	0.35															
105	0.76	0.69	0.73	0.58															
110	1.04	0.95	0.99	0.80															
115	1.32	1.22	1.26	1.08															
120	1.65	1.53	1.54	1.39															
125	1.93	1.84	1.83	1.66															
130	2.24	2.16	2.13	2.00															
135	2.54	2.46	2.41	2.27															
140	2.81	2.75	2.69	2.55															
145	3.07	3.03	2.96	2.86															
150	3.28	3.29	3.21	3.11															
155	3.52	3.53	3.44	3.36															
160	3.70	3.75	3.65	3.59															
165	3.88	3.92	3.85	3.80															
170	4.01	4.03	3.99	3.91															
175	4.15	4.13	4.11	4.05															
180	4.16	4.15	4.16	4.16															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks: