
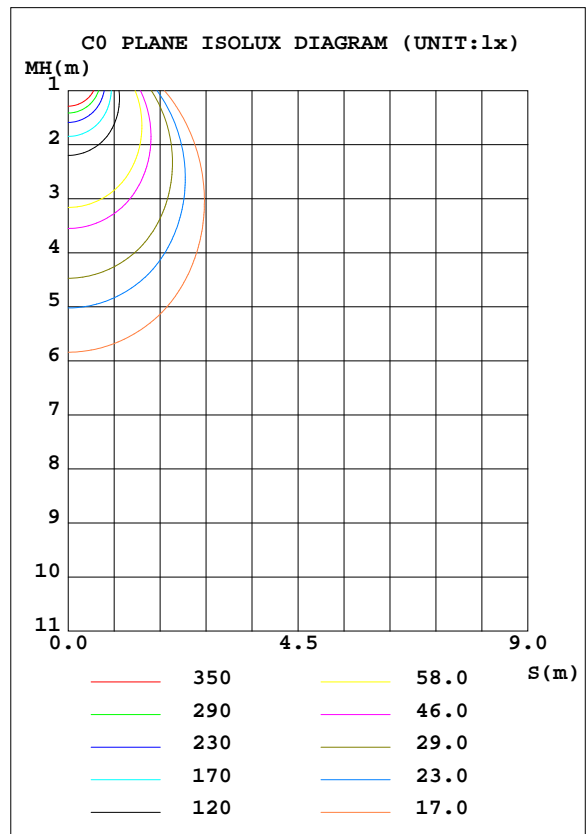


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.25V I:0.0576A P:11.902W PF:0.8975 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1328.78x1 lm		
NAME: D12W-CC 5700K	TYPE: 12W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 111.64 lm/W			
MODEL	D12W-CC 5700K	I _{max} (cd)	579.7	S/MH(C0/180)	1.20
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.18
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	1328.8	η UP, DN(C0-180)	0.4,49.8
NOMINAL FLUX(lm)	1328.78	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.4,49.4
LAMPS INSIDE	1	η up(%)	0.8	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230	η down(%)	99.2	CIBSE SHR MAX	1.30

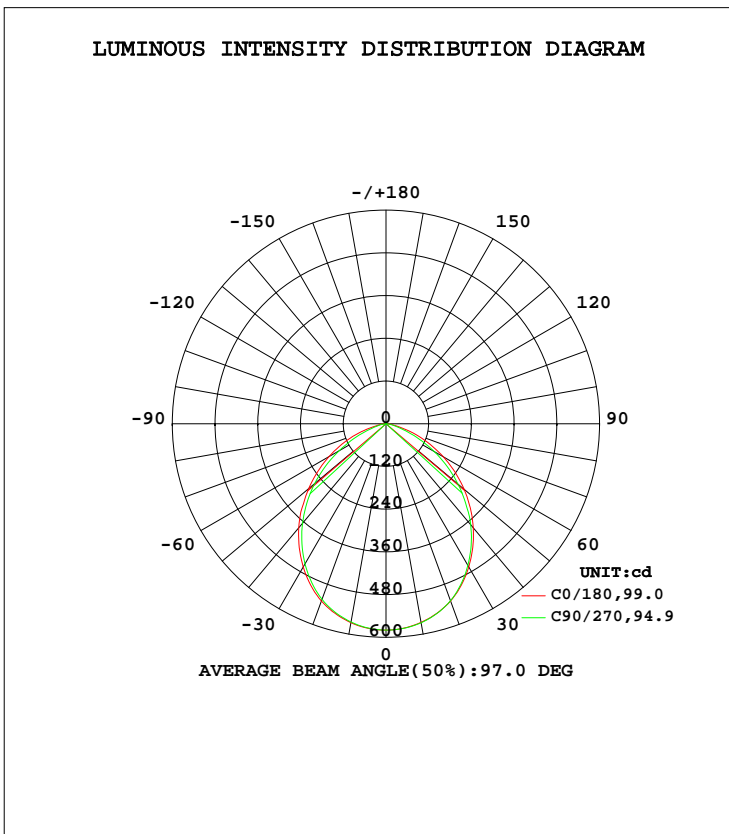

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270				γ	Φ zone	Φ total	%lum,lamp
10	566.7	567.8	567.4	565.6				0- 10	54.72	54.72	4.12,4.12
20	530.0	529.4	530.1	525.1				10- 20	155.3	210.0	15.8,15.8
30	465.0	460.0	464.9	455.0				20- 30	229.1	439.1	33,33
40	381.3	370.2	381.2	364.6				30- 40	262.1	701.2	52.8,52.8
50	286.4	264.4	283.7	261.4				40- 50	250.4	951.6	71.6,71.6
60	186.5	156.7	184.9	152.2				50- 60	198.3	1150	86.5,86.5
70	90.03	58.87	91.16	56.20				60- 70	118.9	1269	95.5,95.5
80	21.25	13.40	20.52	12.41				70- 80	42.50	1311	98.7,98.7
90	0.3143	0.1731	0.1949	0.1583				80- 90	6.874	1318	99.2,99.2
100	0.5287	0.4628	0.5013	0.3395				90-100	0.3429	1319	99.2,99.2
110	1.019	0.9363	0.9640	0.7850				100-110	0.7230	1319	99.3,99.3
120	1.592	1.515	1.520	1.364				110-120	1.197	1320	99.4,99.4
130	2.193	2.139	2.094	1.938				120-130	1.604	1322	99.5,99.5
140	2.756	2.718	2.651	2.539				130-140	1.838	1324	99.6,99.6
150	3.240	3.241	3.158	3.074				140-150	1.834	1326	99.8,99.8
160	3.652	3.698	3.603	3.524				150-160	1.570	1327	99.9,99.9
170	3.976	3.982	3.942	3.887				160-170	1.071	1328	100,100
180	4.098	4.093	4.081	4.082				170-180	0.3829	1329	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

0 - 45 DEG Zonal Flux:830.71 %lum: 62.5%

0 - 60 DEG Zonal Flux:1149.9 %lum: 86.5%

All measured values may vary less than 35 %

from the average measured value in the 0 to 130 deg. zone: 11.1%

All measured values in the 0 to 130 deg. zone


may vary less than 50% from the average value of itself: 16.0%

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.25V I:0.0576A P:11.902W PF:0.8975 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1328.78x1 lm		
NAME: D12W-CC 5700K	TYPE: 12W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

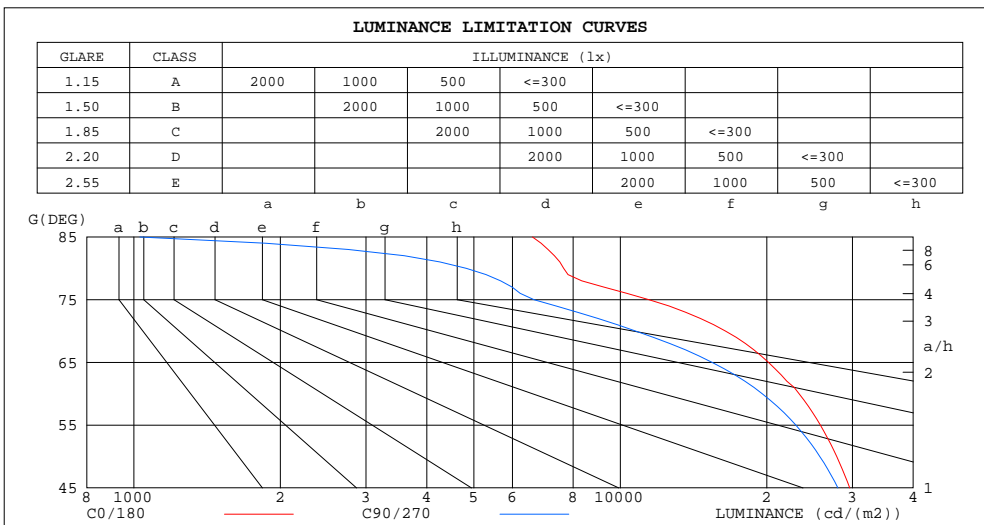

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6599	1029
80	7650	4823
75	11457	6645
70	16452	10758
65	20172	15453
60	23315	19589
55	25781	22955
50	27850	25708
45	29618	28006


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 8.690m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.25V I:0.0576A P:11.902W PF:0.8975 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1328.78x1 lm		
NAME: D12W-CC 5700K	TYPE: 12W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.06	1.02	.99	1.04	1.00	.97	.99	.97	.94	.95	.93	.91	.92	.90	.88	.86
2.0	.94	.88	.83	.92	.87	.82	.88	.84	.80	.85	.81	.78	.82	.79	.76	.74
3.0	.84	.76	.70	.82	.75	.70	.79	.73	.68	.76	.71	.67	.74	.69	.66	.64
4.0	.75	.67	.60	.73	.66	.60	.71	.64	.59	.68	.63	.58	.66	.61	.57	.55
5.0	.67	.59	.53	.66	.58	.52	.64	.57	.52	.62	.56	.51	.60	.55	.51	.49
6.0	.61	.52	.46	.60	.52	.46	.58	.51	.46	.56	.50	.45	.55	.49	.45	.43
7.0	.55	.47	.41	.55	.47	.41	.53	.46	.41	.52	.45	.41	.50	.45	.40	.38
8.0	.51	.43	.37	.50	.42	.37	.49	.42	.37	.47	.41	.36	.46	.41	.36	.34
9.0	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.43	.37	.33	.31
10.0	.43	.36	.31	.43	.35	.31	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28

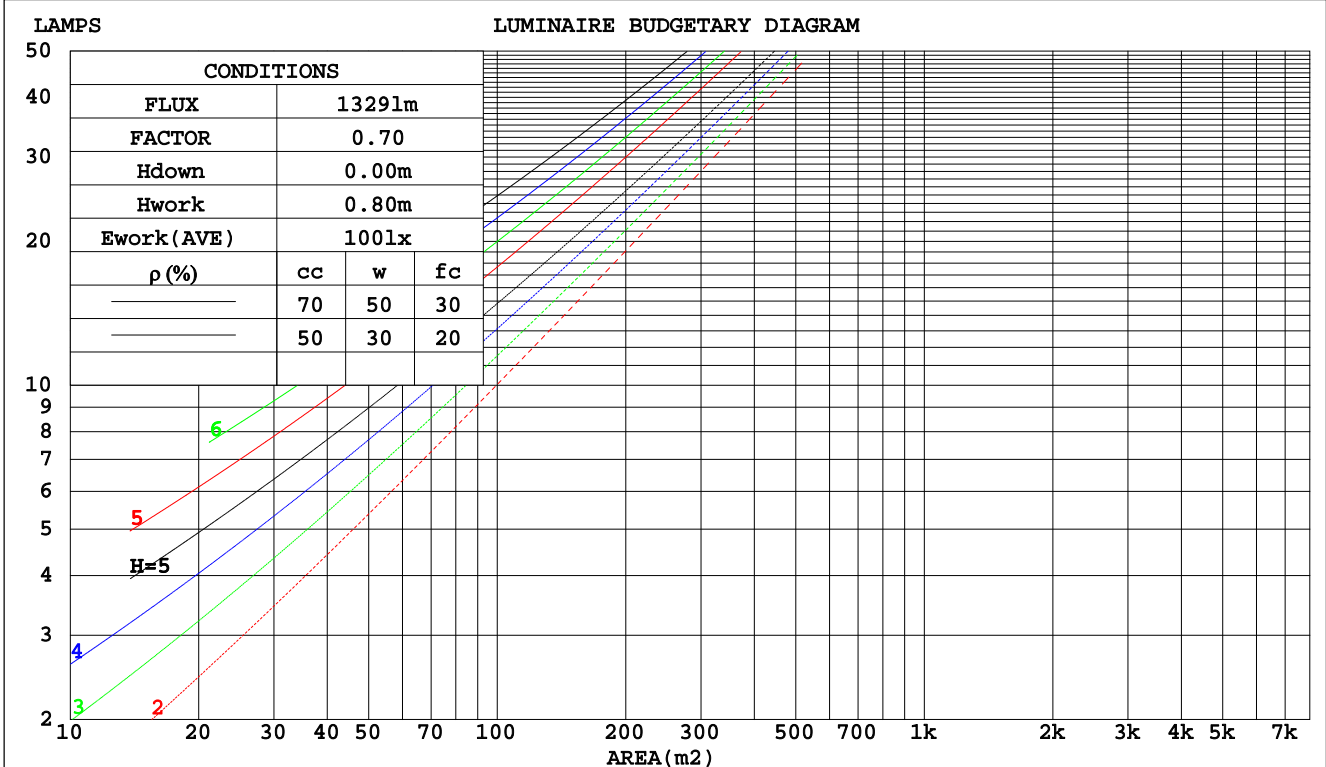

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 8.690m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:230.25V I:0.0576A P:11.902W PF:0.8975 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1328.78x1 lm		
NAME: D12W-CC 5700K	TYPE: 12W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.264	.150	.048	.257	.147	.047	.244	.140	.045	.231	.133	.043	.220	.127	.041	
2.0	.256	.140	.043	.250	.138	.042	.238	.132	.041	.227	.127	.040	.217	.123	.039	
3.0	.242	.129	.039	.236	.127	.038	.226	.123	.037	.216	.119	.036	.208	.115	.036	
4.0	.227	.118	.035	.222	.116	.034	.213	.113	.034	.204	.110	.033	.196	.107	.032	
5.0	.212	.108	.031	.208	.107	.031	.200	.104	.031	.192	.101	.030	.185	.099	.030	
6.0	.199	.100	.029	.195	.099	.028	.188	.096	.028	.181	.094	.028	.174	.092	.027	
7.0	.187	.092	.026	.183	.091	.026	.177	.089	.026	.170	.087	.025	.165	.086	.025	
8.0	.175	.086	.024	.172	.085	.024	.166	.083	.024	.161	.081	.024	.156	.080	.023	
9.0	.165	.080	.022	.162	.079	.022	.157	.078	.022	.152	.076	.022	.147	.075	.022	
10.0	.156	.075	.021	.154	.074	.021	.149	.073	.021	.144	.072	.020	.140	.070	.020	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.197	.197	.197	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.183	.163	.144	.157	.140	.124	.107	.096	.086	.062	.056	.050	.020	.018	.016	
2.0	.174	.138	.108	.149	.119	.094	.102	.082	.065	.059	.048	.038	.019	.015	.012	
3.0	.165	.120	.084	.142	.104	.073	.097	.072	.051	.056	.042	.030	.018	.014	.010	
4.0	.158	.107	.068	.135	.092	.059	.093	.064	.042	.054	.038	.025	.017	.012	.008	
5.0	.150	.096	.056	.129	.083	.049	.089	.058	.034	.052	.034	.020	.017	.011	.007	
6.0	.144	.088	.048	.123	.076	.041	.085	.053	.029	.049	.031	.017	.016	.010	.006	
7.0	.137	.081	.041	.118	.070	.036	.081	.049	.025	.047	.029	.015	.015	.009	.005	
8.0	.131	.075	.036	.113	.065	.032	.078	.046	.022	.045	.027	.013	.015	.009	.004	
9.0	.125	.070	.033	.108	.061	.028	.075	.043	.020	.044	.025	.012	.014	.008	.004	
10.0	.120	.066	.030	.103	.057	.026	.072	.040	.018	.042	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.25V I:0.0576A P:11.902W PF:0.8975 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1328.78x1 lm		
NAME: D12W-CC 5700K	TYPE: 12W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.9	24.3	23.2	24.5	24.7	22.4	23.8	22.7	24.0	24.2
3H	23.8	25.1	24.1	25.3	25.6	23.0	24.3	23.3	24.5	24.8
4H	24.0	25.2	24.3	25.5	25.7	23.1	24.3	23.4	24.5	24.8
6H	24.0	25.2	24.4	25.5	25.7	23.0	24.2	23.4	24.5	24.7
8H	24.0	25.1	24.4	25.4	25.7	23.0	24.1	23.4	24.4	24.7
12H	24.0	25.1	24.4	25.4	25.7	23.0	24.0	23.3	24.3	24.6
4H 2H	23.2	24.4	23.5	24.7	25.0	22.8	24.0	23.1	24.3	24.6
3H	24.2	25.3	24.6	25.6	25.9	23.5	24.6	23.9	24.9	25.2
4H	24.5	25.4	24.9	25.8	26.1	23.6	24.6	24.0	24.9	25.3
6H	24.6	25.4	25.0	25.8	26.2	23.7	24.5	24.1	24.9	25.2
8H	24.6	25.4	25.0	25.8	26.2	23.6	24.4	24.1	24.8	25.2
12H	24.6	25.3	25.0	25.7	26.1	23.6	24.3	24.0	24.7	25.1
8H 4H	24.5	25.3	24.9	25.6	26.0	23.7	24.5	24.1	24.8	25.2
6H	24.6	25.3	25.1	25.7	26.1	23.8	24.4	24.2	24.8	25.2
8H	24.7	25.2	25.1	25.7	26.1	23.8	24.3	24.2	24.8	25.2
12H	24.7	25.2	25.2	25.7	26.1	23.7	24.2	24.2	24.7	25.2
12H 4H	24.5	25.2	24.9	25.6	26.0	23.6	24.4	24.1	24.8	25.2
6H	24.6	25.2	25.1	25.6	26.1	23.7	24.3	24.2	24.7	25.2
8H	24.7	25.1	25.2	25.6	26.1	23.8	24.2	24.2	24.7	25.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.3 / - 0.4					+ 0.4 / - 0.6				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.5				
2.0H	+ 0.7 / - 0.7					+ 0.7 / - 0.8				

CIE Pub.117, 1329 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.0)
Area: 0.016 m2

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-09-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.25V I:0.0576A P:11.902W PF:0.8975 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1328.78x1 lm		
NAME: D12W-CC 5700K	TYPE: 12W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	62	51	45	61	51	45	60	50	44	38
0.80	72	62	55	71	61	55	69	60	54	48
1.00	81	71	64	79	70	64	77	71	63	57
1.25	87	78	72	86	77	71	83	76	71	64
1.50	92	83	77	91	83	77	88	81	76	69
2.00	98	91	85	97	90	85	93	88	83	76
2.50	102	95	90	100	94	89	96	91	87	79
3.00	105	99	94	103	97	93	99	94	91	83
4.00	108	103	99	106	102	98	102	98	95	87
5.00	110	106	103	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.25V I:0.0576A P:11.902W PF:0.8975 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1328.78x1 lm		
NAME: D12W-CC 5700K	TYPE: 12W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

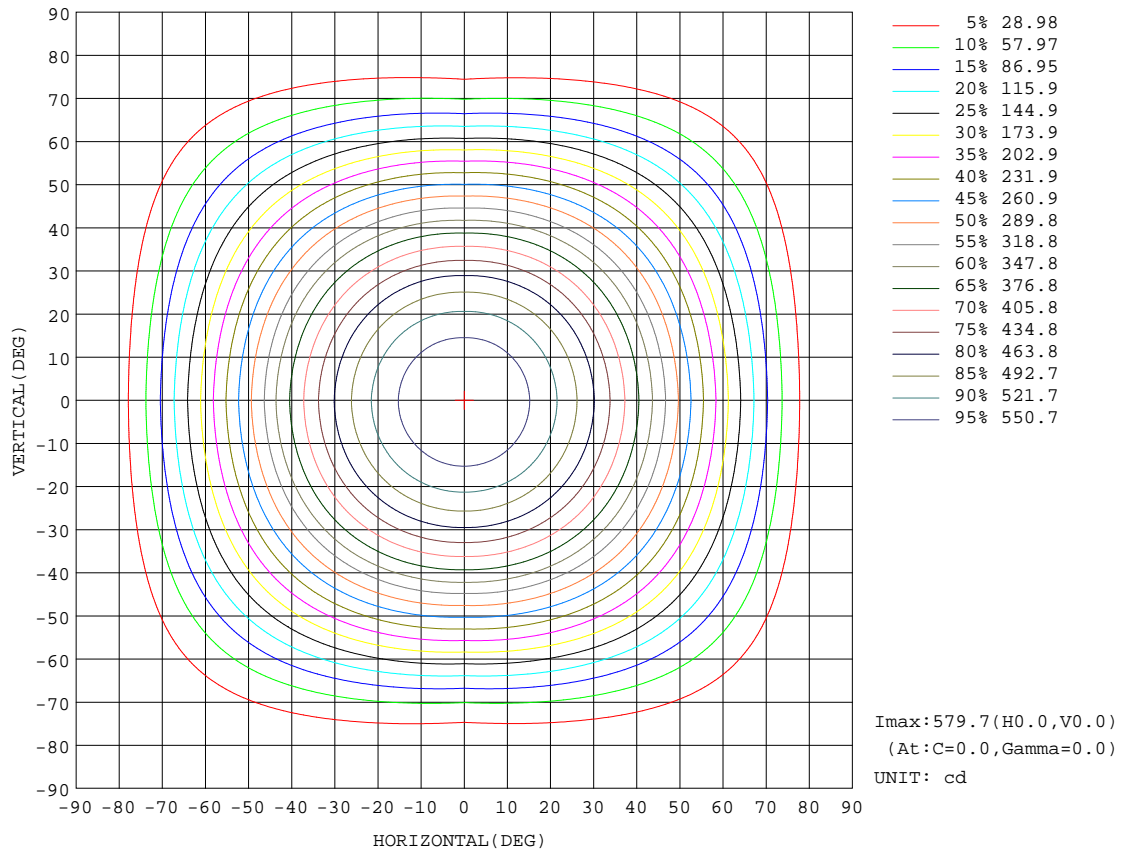


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-09-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 8.690m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.25V I:0.0576A P:11.902W PF:0.8975 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1328.78x1 lm		
NAME: D12W-CC 5700K	TYPE: 12W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

Flux out:1150 lm

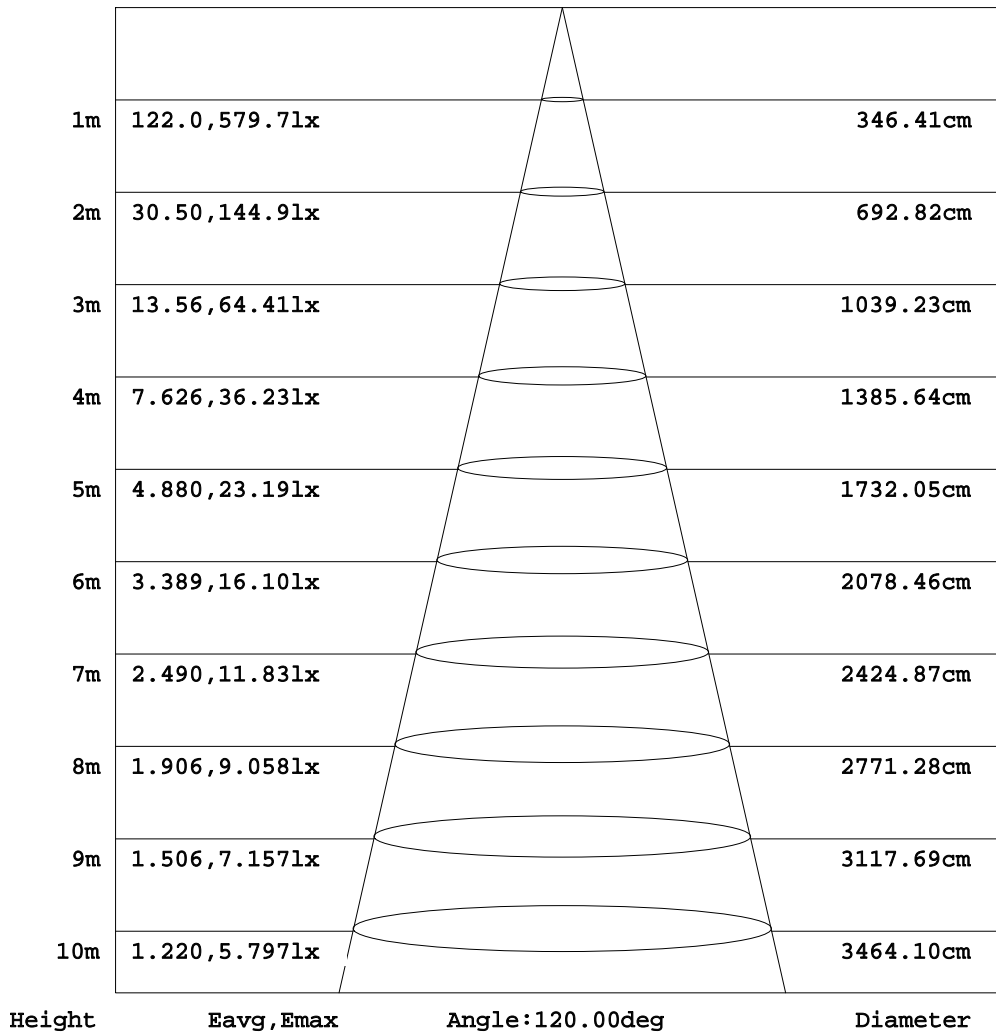


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-09-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 8.690m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.25V I:0.0576A P:11.902W PF:0.8975 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1328.78x1 lm		
NAME: D12W-CC 5700K	TYPE: 12W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

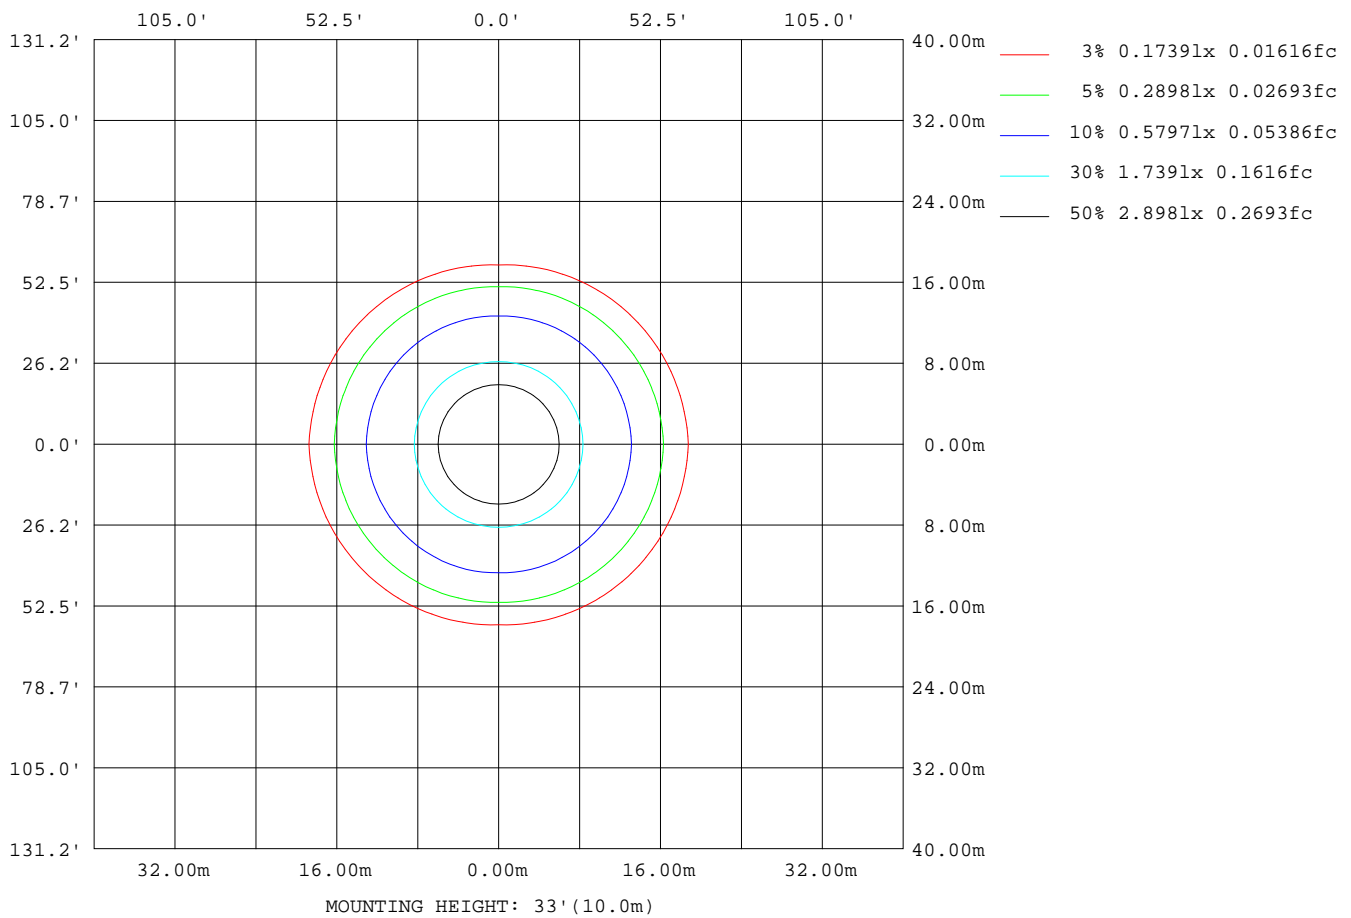

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:230.25V I:0.0576A P:11.902W PF:0.8975 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1328.78x1 lm		
NAME: D12W-CC 5700K	TYPE: 12W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	20214
L_0~180(75)av	11613
L_0~180(85)av	6442
L_90~270(65)av	15182
L_90~270(75)av	6506
L_90~270(85)av	854
L_45(65)av	17072
L_45(75)av	8431
L_45(85)av	2940

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

Planar Illuminance Curve

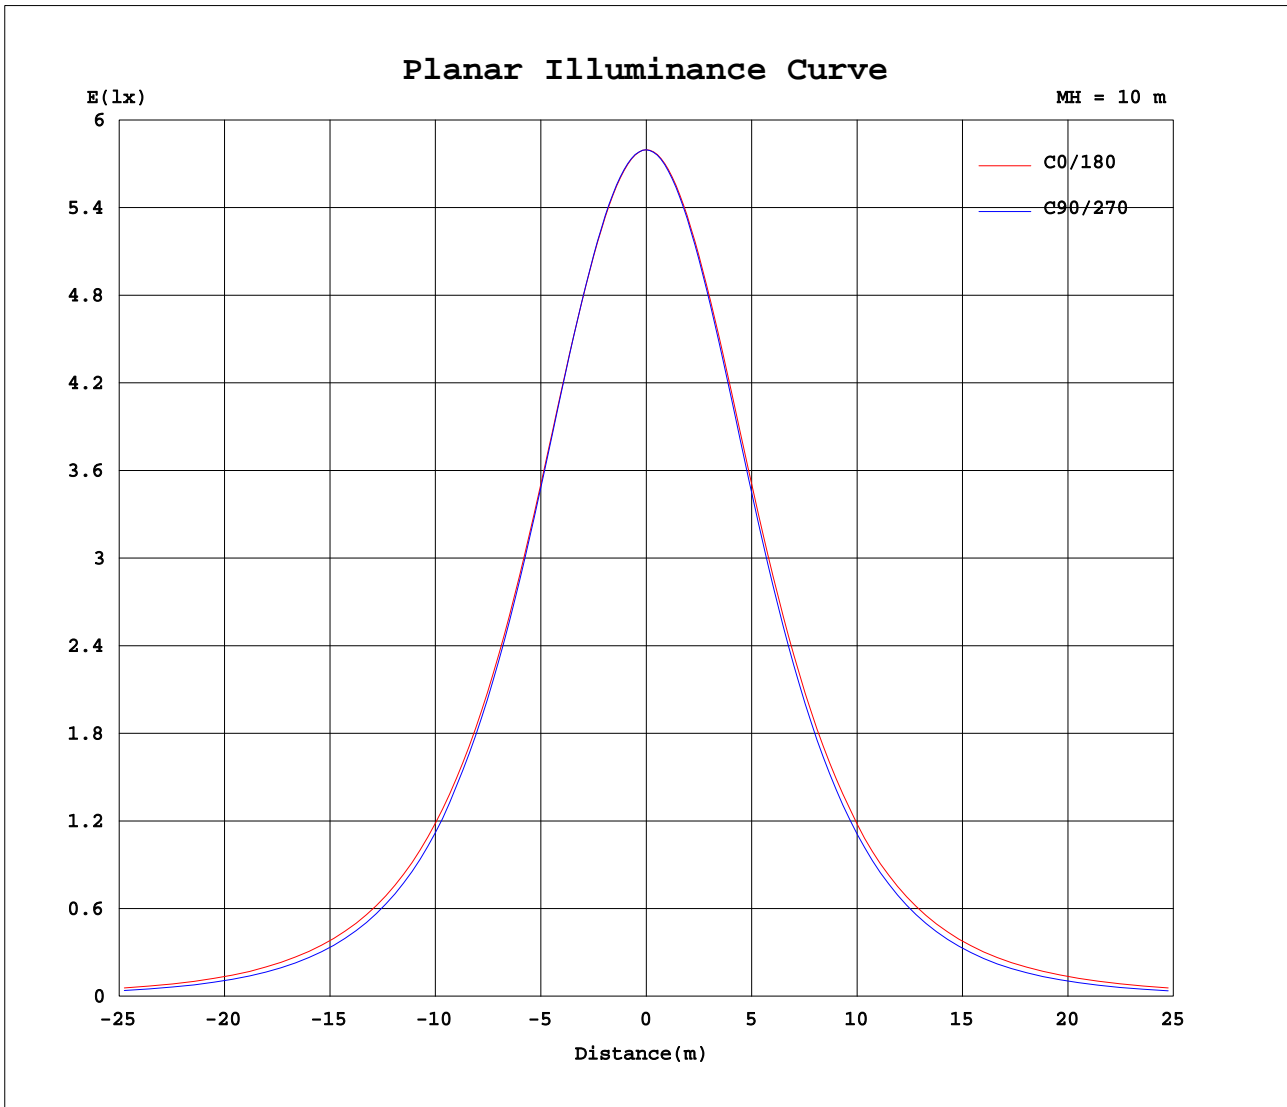

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 8.690m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.25V I:0.0576A P:11.902W PF:0.8975 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1328.78x1 lm		
NAME: D12W-CC 5700K	TYPE: 12W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.016	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	90	180	270															
0	580	580	580	580															
5	576	577	577	576															
10	567	568	567	566															
15	551	552	552	549															
20	530	529	530	525															
25	500	498	500	493															
30	465	460	465	455															
35	425	417	425	412															
40	381	370	381	365															
45	335	317	334	314															
50	286	264	284	261															
55	237	211	234	207															
60	187	157	185	152															
65	136	104	137	101															
70	90.0	58.9	91.2	56.2															
75	47.4	27.5	48.7	26.4															
80	21.3	13.4	20.5	12.4															
85	9.20	1.43	8.77	0.95															
90	0.31	0.17	0.19	0.16															
95	0.33	0.32	0.32	0.19															
100	0.53	0.46	0.50	0.34															
105	0.76	0.68	0.72	0.56															
110	1.02	0.94	0.96	0.79															
115	1.31	1.21	1.24	1.06															
120	1.59	1.51	1.52	1.36															
125	1.90	1.82	1.80	1.65															
130	2.19	2.14	2.09	1.94															
135	2.48	2.42	2.38	2.23															
140	2.76	2.72	2.65	2.54															
145	3.01	2.99	2.91	2.81															
150	3.24	3.24	3.16	3.07															
155	3.46	3.49	3.39	3.31															
160	3.65	3.70	3.60	3.52															
165	3.82	3.87	3.79	3.72															
170	3.98	3.98	3.94	3.89															
175	4.06	4.08	4.06	3.98															
180	4.10	4.09	4.08	4.08															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks: