



POWER-LITE®

Certainty at The Speed of Light



D12W-CC



D18W-CC

LED 3CCT

DOWNLIGHT

D12W-CC, D18W-CC

These POWER-LITE® LED Downlights save energy and cost as compared to standard halogen downlights. These come with an external LED driver with IC-4 insulation rating on the fitting, for easy install.



APPLICATIONS

Domestic | Retail

Commercial



1800 909 306

nedlandsgroup.com.au


sales@nedlandsgroup.com.au




POWER-LITE®

Certainty at The Speed of Light

DIMENSIONS (mm)

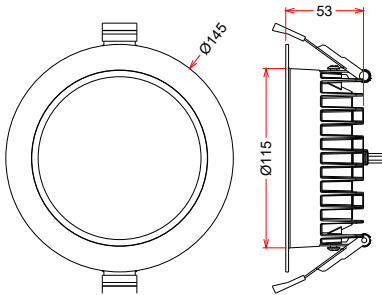

D12W-CC Cutout 120-130

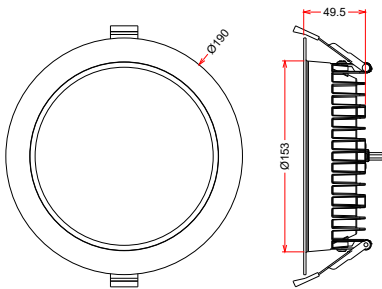

D18W-CC Cutout 160-170

Notes:

- This downlight range is compatible with C-BUS / Trailing edge dimming systems
- It is recommended to test it, before carrying out a large installation as some C-BUS systems may not be compatible.

LED Chip
Epistar

Efficacy
Around 100-130lm/w

Life Expectancy
50,000 hrs

LED Driver
Dimmable

Working Temp
-20°C to +40°C

Connection
0.6m Power Cable with AU Plug

Power Factor
>0.9

SCDM
<6 Macadam steps

CRI
>80

12W
18W

3CCT

AC200-240V

White Frame Colour

PRODUCT

SPECIFICATIONS

CODE

LED 3CCT DOWNLIGHT

	12W		3000K 1246lm
	145mm x 50mm		4000K 1344lm
	Carton Qty 24		5700K 1328lm
	18W		3000K 2106lm
	190mm x 49.5mm		4000K 2281lm
	Carton Qty 12		5700K 2329lm

D12W-CC

D18W-CC

IP54

90° Beam Angle




POWER-LITE®


Certainty at The Speed of Light

PHOTOMETRICS


D12W-CC | 3000K

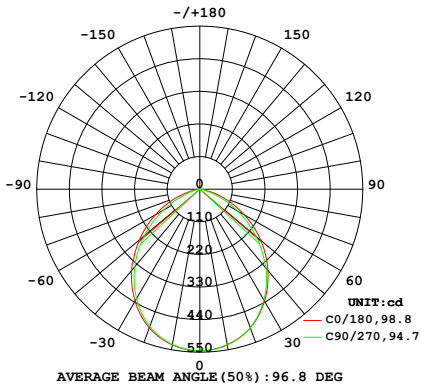


D12W-CC | 4000K

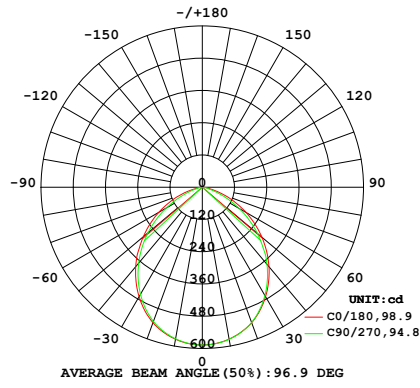


D12W-CC | 5700K

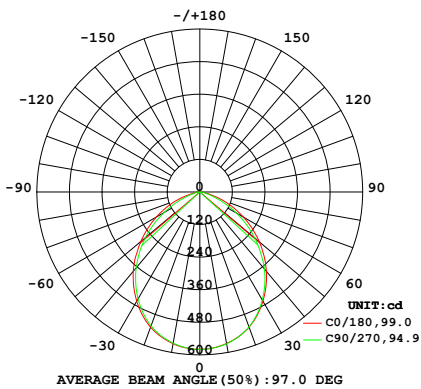

D18W-CC | 3000K

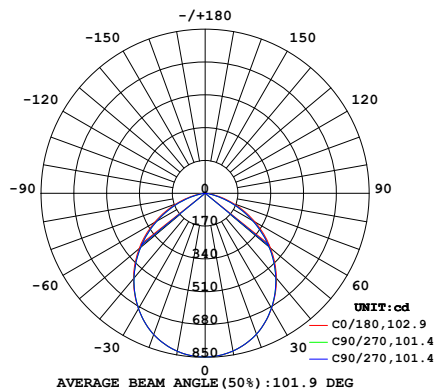

D18W-CC | 4000K

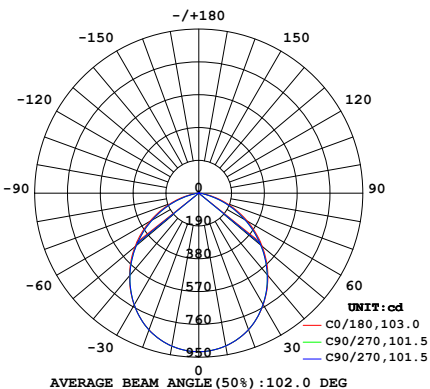

D18W-CC | 5700K

