
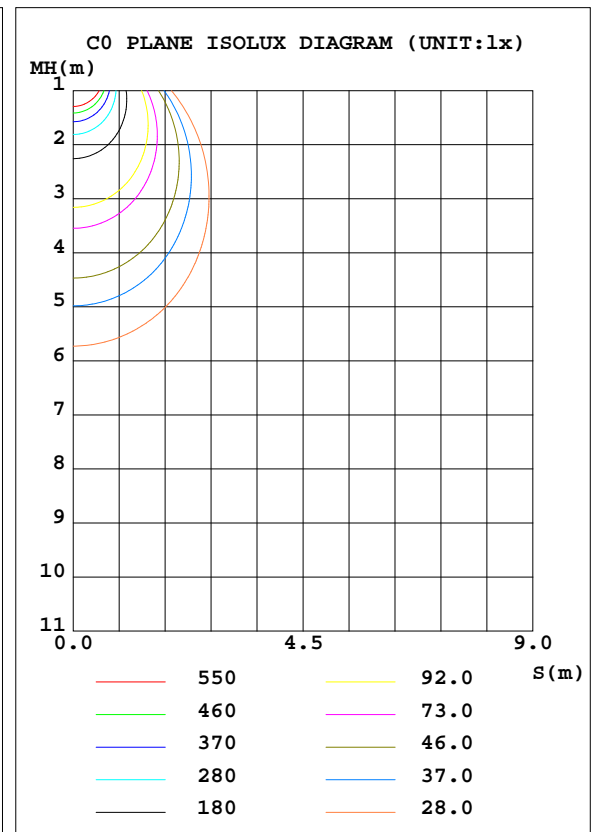


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.19V I:0.0773A P:16.895W PF:0.9394 Freq:49.99Hz UTHDi:0.25% ITHDi:20.38% KDisp:0.9589 Lamp Flux:2281.42x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 135.04 lm/W			
MODEL	D18W-CC 4000K	I _{max} (cd)	918.1	S/MH(C0/180)	1.22
NOMINAL POWER(W)	18	LOR(%)	100.0	S/MH(C90/270)	1.21
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	2281.4	η UP, DN(C0-180)	0.4,49.4
NOMINAL FLUX(lm)	2281.42	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.4,49.7
LAMPS INSIDE	1	η up(%)	0.9	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230.0	η down(%)	99.1	CIBSE SHR MAX	1.35

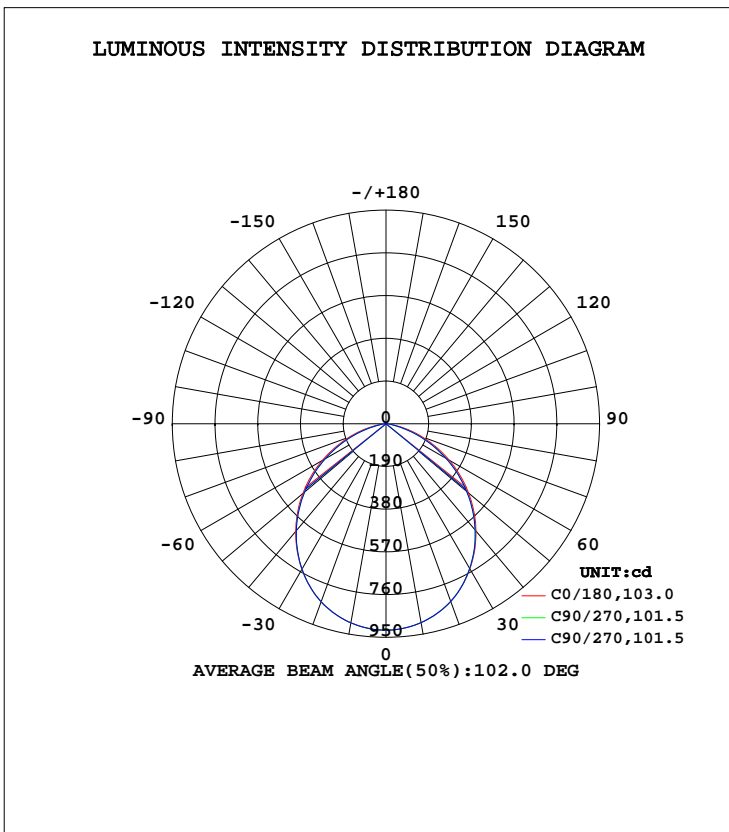

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270				γ	Φ zone	Φ total	%lum, lamp
10	898.3	898.0	899.1	899.2				0- 10	86.71	86.71	3.8,3.8
20	841.4	841.2	842.4	843.1				10- 20	246.7	333.4	14.6,14.6
30	746.2	744.3	747.8	747.2				20- 30	367.6	701.0	30.7,30.7
40	622.9	617.2	625.2	620.6				30- 40	429.2	1130	49.5,49.5
50	480.0	469.0	483.0	472.9				40- 50	424.5	1555	68.1,68.1
60	325.2	308.5	327.6	313.4				50- 60	355.8	1910	83.7,83.7
70	171.4	151.3	174.1	155.0				60- 70	237.2	2148	94.1,94.1
80	42.48	28.42	43.77	29.57				70- 80	99.20	2247	98.5,98.5
90	0.7466	0.6515	0.6149	0.5500				80- 90	14.98	2262	99.1,99.1
100	1.268	1.242	1.160	1.019				90-100	0.9420	2263	99.2,99.2
110	2.080	2.049	1.940	1.788				100-110	1.643	2264	99.3,99.3
120	3.013	2.997	2.817	2.667				110-120	2.387	2267	99.4,99.4
130	3.966	3.952	3.736	3.598				120-130	2.992	2270	99.5,99.5
140	4.838	4.859	4.631	4.523				130-140	3.295	2273	99.6,99.6
150	5.584	5.611	5.413	5.327				140-150	3.200	2276	99.8,99.8
160	6.229	6.314	6.110	6.050				150-160	2.695	2279	99.9,99.9
170	6.671	6.720	6.618	6.558				160-170	1.815	2281	100,100
180	6.868	6.881	6.856	6.839				170-180	0.6442	2281	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

Conical surface Flux(90deg): 1347.2 lm

%lum = 59.1%
 %lamp = 59.1%

Conical surface Flux(120deg): 1910.5 lm

%lum = 83.7%
 %lamp = 83.7%

0 - 45 DEG Zonal Flux:1347.2 %lum: 59.1%
 0 - 60 DEG Zonal Flux:1910.5 %lum: 83.7%


All measured values may vary less than 35 %
 from the average measured value in the 0 to 130 deg. zone: 12.0%
 All measured values in the 0 to 130 deg. zone
 may vary less than 50% from the average value of itself: 17.2%

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.19V I:0.0773A P:16.895W PF:0.9394 Freq:49.99Hz UTHDi:0.25% ITHDi:20.38% KDisp:0.9589 Lamp Flux:2281.42x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:

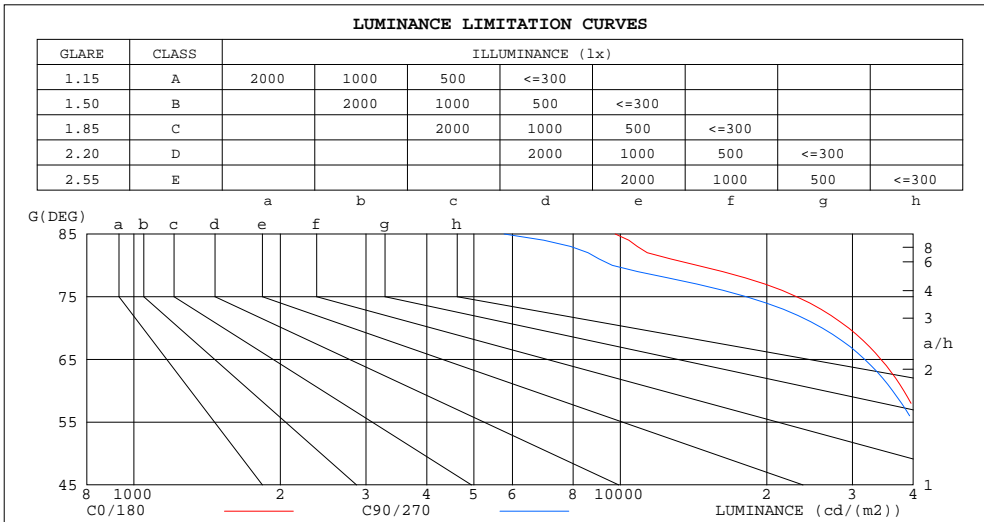

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	9763	5771
80	14389	9627
75	23041	18161
70	29479	26021
65	34347	31806
60	38255	36290
55	41373	40030
50	43925	42915
45	46034	45350


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.19V I:0.0773A P:16.895W PF:0.9394 Freq:49.99Hz UTHDi:0.25% ITHDi:20.38% KDisp:0.9589 Lamp Flux:2281.42x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.05	1.02	.98	1.03	.90	.96	.99	.96	.93	.95	.92	.90	.91	.89	.87	.85
2.0	.93	.86	.81	.91	.85	.80	.87	.82	.78	.84	.80	.76	.81	.77	.75	.72
3.0	.82	.74	.68	.80	.73	.68	.77	.71	.66	.75	.69	.65	.72	.68	.64	.62
4.0	.73	.65	.58	.72	.64	.58	.69	.62	.57	.67	.61	.56	.65	.60	.55	.53
5.0	.66	.57	.51	.64	.56	.50	.62	.55	.50	.60	.54	.49	.58	.53	.49	.46
6.0	.59	.51	.44	.58	.50	.44	.56	.49	.44	.55	.48	.43	.53	.47	.43	.41
7.0	.54	.45	.39	.53	.45	.39	.51	.44	.39	.50	.43	.39	.48	.43	.38	.36
8.0	.49	.41	.35	.48	.41	.35	.47	.40	.35	.46	.39	.35	.45	.39	.34	.33
9.0	.45	.37	.32	.45	.37	.32	.43	.36	.32	.42	.36	.31	.41	.35	.31	.29
10.0	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.38	.33	.28	.27

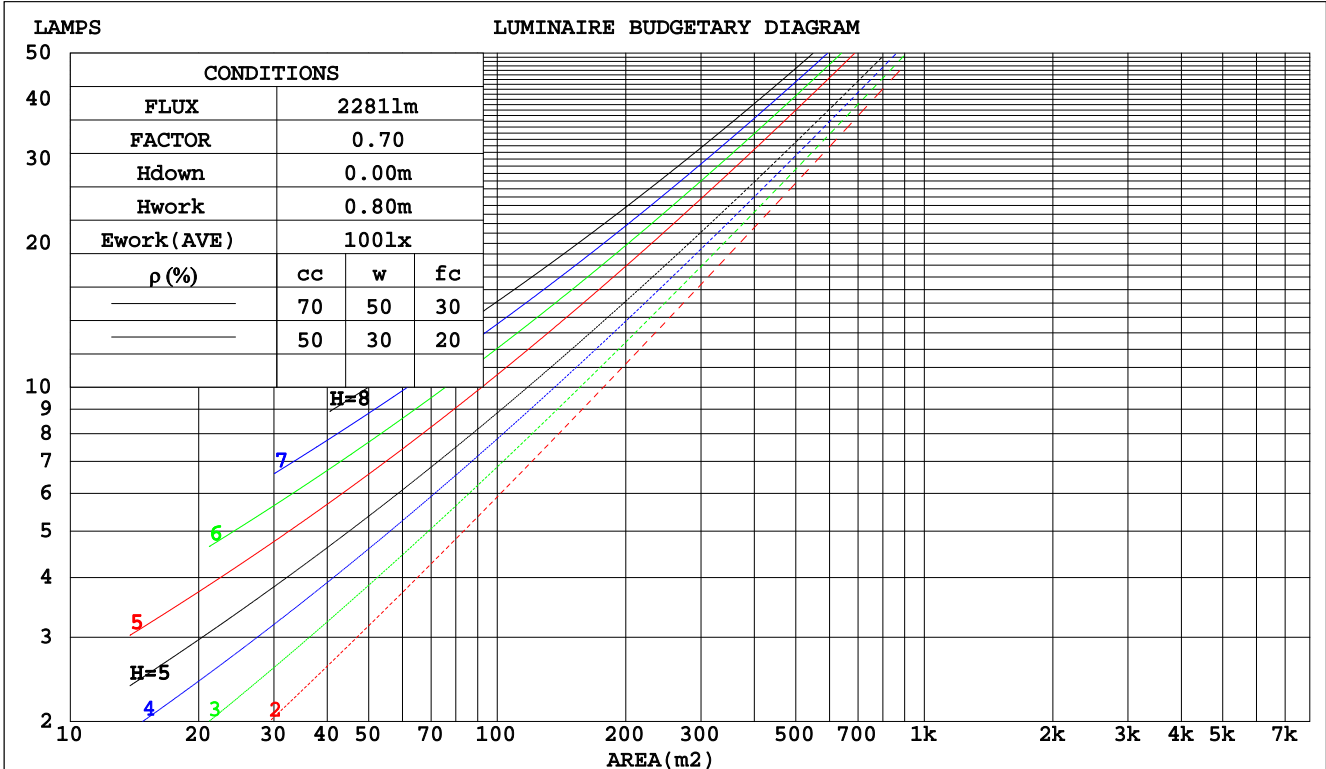

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:230.19V I:0.0773A P:16.895W PF:0.9394 Freq:49.99Hz UTHDi:0.25% ITHDi:20.38% KDisp:0.9589 Lamp Flux:2281.42x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.277	.158	.050	.270	.154	.049	.256	.147	.047	.244	.141	.045	.232	.135	.043	
2.0	.267	.146	.045	.261	.144	.044	.249	.138	.043	.238	.133	.042	.228	.129	.041	
3.0	.251	.134	.040	.246	.132	.040	.235	.127	.039	.225	.123	.038	.216	.120	.037	
4.0	.234	.122	.036	.229	.120	.035	.220	.117	.035	.211	.114	.034	.203	.110	.034	
5.0	.219	.111	.032	.214	.110	.032	.206	.107	.032	.198	.105	.031	.191	.102	.031	
6.0	.204	.102	.029	.200	.101	.029	.193	.099	.029	.186	.097	.028	.179	.094	.028	
7.0	.191	.094	.027	.187	.093	.027	.181	.091	.026	.175	.089	.026	.169	.088	.026	
8.0	.179	.088	.025	.176	.087	.024	.170	.085	.024	.164	.083	.024	.159	.082	.024	
9.0	.168	.081	.023	.166	.081	.023	.160	.079	.022	.155	.078	.022	.150	.076	.022	
10.0	.159	.076	.021	.156	.075	.021	.151	.074	.021	.147	.073	.021	.142	.072	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.197	.197	.197	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.185	.163	.144	.158	.140	.124	.108	.096	.085	.062	.056	.050	.020	.018	.016	
2.0	.176	.139	.108	.150	.119	.093	.103	.083	.065	.059	.048	.038	.019	.016	.012	
3.0	.168	.121	.084	.144	.104	.073	.099	.072	.051	.057	.042	.030	.018	.014	.010	
4.0	.160	.107	.067	.137	.093	.058	.094	.065	.041	.055	.038	.024	.018	.012	.008	
5.0	.153	.097	.056	.131	.084	.048	.090	.059	.034	.052	.034	.020	.017	.011	.007	
6.0	.146	.088	.047	.125	.077	.041	.086	.054	.029	.050	.032	.017	.016	.010	.006	
7.0	.139	.081	.041	.120	.071	.036	.083	.050	.025	.048	.029	.015	.016	.010	.005	
8.0	.133	.076	.036	.115	.066	.032	.079	.046	.022	.046	.027	.013	.015	.009	.004	
9.0	.127	.071	.033	.110	.061	.028	.076	.043	.020	.044	.025	.012	.014	.008	.004	
10.0	.122	.067	.030	.105	.058	.026	.073	.041	.018	.042	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.19V I:0.0773A P:16.895W PF:0.9394 Freq:49.99Hz UTHDi:0.25% ITHDi:20.38% KDisp:0.9589 Lamp Flux:2281.42x1 lm										
NAME: D18W-CC 4000K				TYPE: 18W			WEIGHT:			
SPEC.: 4000K				DIM.:			SERIAL No.: 1			
MFR.:				SUR.: 0.017			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.8	24.2	23.0	24.4	24.6	22.6	24.0	22.9	24.2	24.5
3H	23.8	25.2	24.1	25.4	25.7	23.6	24.9	23.9	25.1	25.4
4H	24.2	25.4	24.5	25.7	25.9	23.8	25.0	24.1	25.3	25.6
6H	24.3	25.4	24.6	25.7	26.0	23.8	25.0	24.2	25.3	25.6
8H	24.2	25.4	24.6	25.7	26.0	23.8	24.9	24.1	25.2	25.5
12H	24.2	25.3	24.6	25.6	25.9	23.8	24.8	24.1	25.1	25.5
4H 2H	23.2	24.5	23.5	24.7	25.0	23.1	24.3	23.4	24.6	24.9
3H	24.4	25.5	24.8	25.8	26.1	24.2	25.3	24.6	25.6	25.9
4H	24.8	25.8	25.2	26.1	26.5	24.5	25.5	24.9	25.8	26.2
6H	25.0	25.9	25.4	26.2	26.6	24.6	25.4	25.0	25.8	26.2
8H	25.0	25.8	25.4	26.2	26.6	24.5	25.4	25.0	25.7	26.1
12H	25.0	25.7	25.4	26.1	26.5	24.5	25.3	25.0	25.7	26.1
8H 4H	24.9	25.7	25.3	26.1	26.5	24.6	25.4	25.0	25.8	26.2
6H	25.1	25.8	25.6	26.2	26.6	24.7	25.4	25.1	25.8	26.2
8H	25.1	25.7	25.6	26.2	26.6	24.7	25.3	25.2	25.7	26.2
12H	25.2	25.7	25.7	26.1	26.6	24.7	25.2	25.2	25.7	26.2
12H 4H	24.9	25.6	25.3	26.0	26.4	24.5	25.3	25.0	25.7	26.1
6H	25.1	25.7	25.6	26.1	26.6	24.7	25.3	25.1	25.7	26.2
8H	25.1	25.6	25.6	26.1	26.6	24.7	25.2	25.2	25.7	26.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.4				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.5 / - 0.4					+ 0.5 / - 0.5				

CIE Pub.117, 2281 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.9)
Area: 0.017 m2

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-01-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.600m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.19V I:0.0773A P:16.895W PF:0.9394 Freq:49.99Hz UTHDi:0.25% ITHDi:20.38% KDisp:0.9589 Lamp Flux:2281.42x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	60	49	42	59	49	42	58	48	42	36
0.80	70	59	52	69	59	52	68	58	52	45
1.00	79	68	62	78	68	61	75	69	61	54
1.25	86	76	69	84	75	69	82	74	68	61
1.50	91	82	75	89	81	75	86	79	73	66
2.00	97	89	83	95	88	83	92	86	81	74
2.50	101	94	88	99	92	87	95	90	85	77
3.00	104	98	93	102	96	92	98	93	89	81
4.00	108	102	98	105	101	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.19V I:0.0773A P:16.895W PF:0.9394 Freq:49.99Hz UTHDi:0.25% ITHDi:20.38% KDisp:0.9589 Lamp Flux:2281.42x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:

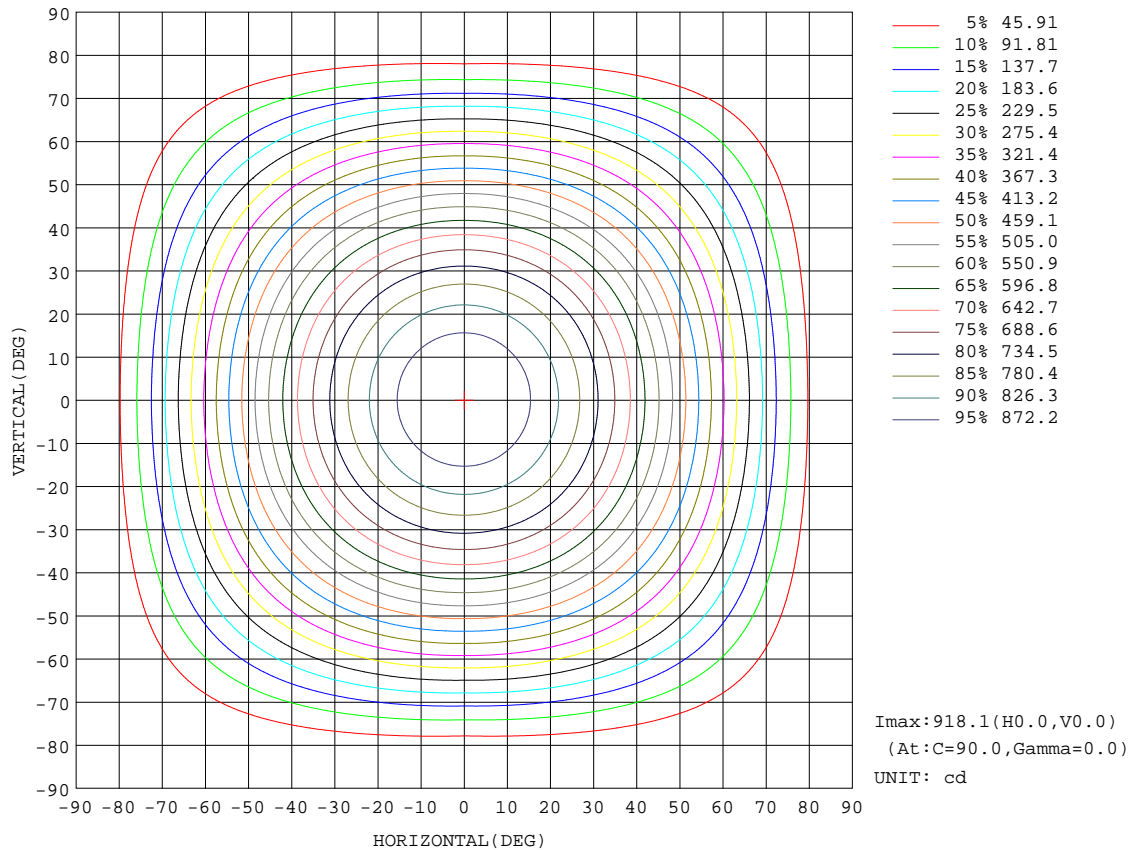


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.0000]
 Remarks:

AAI Figure

Test:U:230.19V I:0.0773A P:16.895W PF:0.9394 Freq:49.99Hz UTHDi:0.25% ITHDi:20.38% KDisp:0.9589 Lamp Flux:2281.42x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:

Flux out:1910 lm

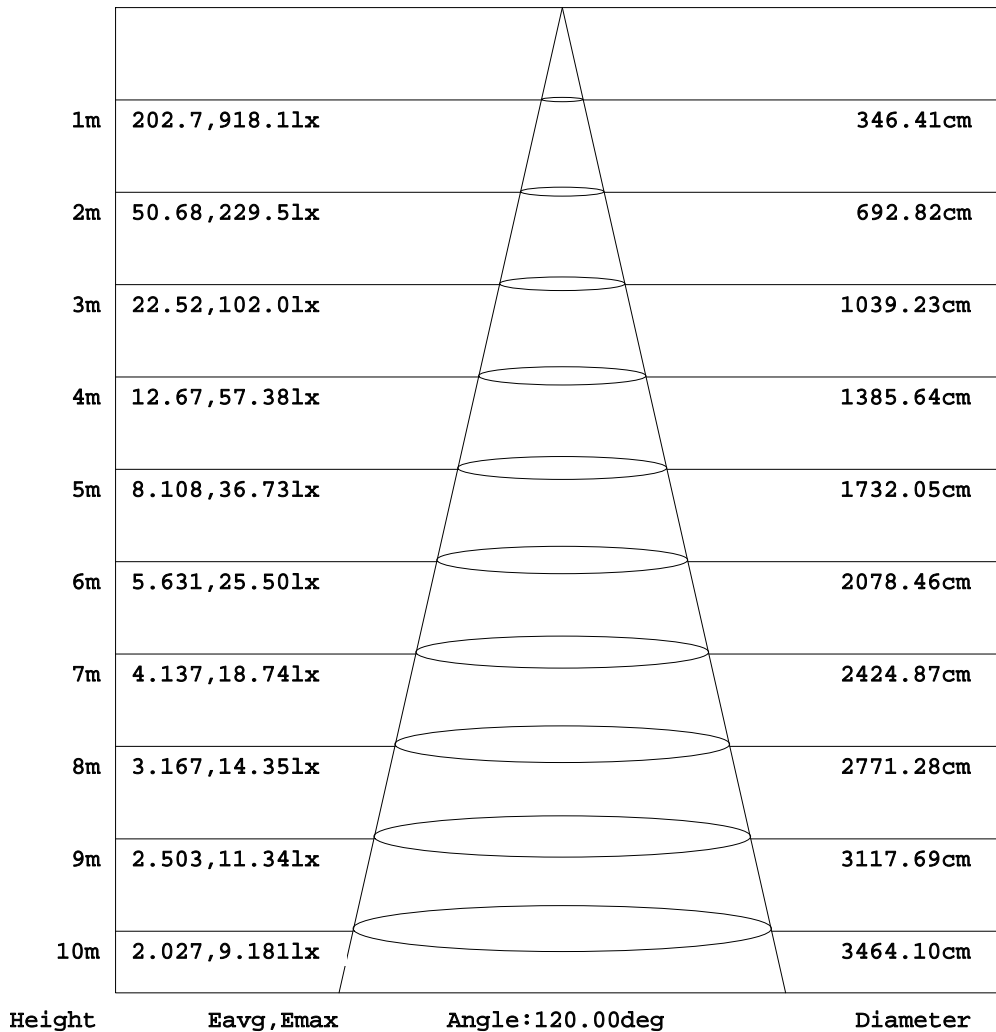


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-01-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.600m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.19V I:0.0773A P:16.895W PF:0.9394 Freq:49.99Hz UTHDi:0.25% ITHDi:20.38% KDisp:0.9589 Lamp Flux:2281.42x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:

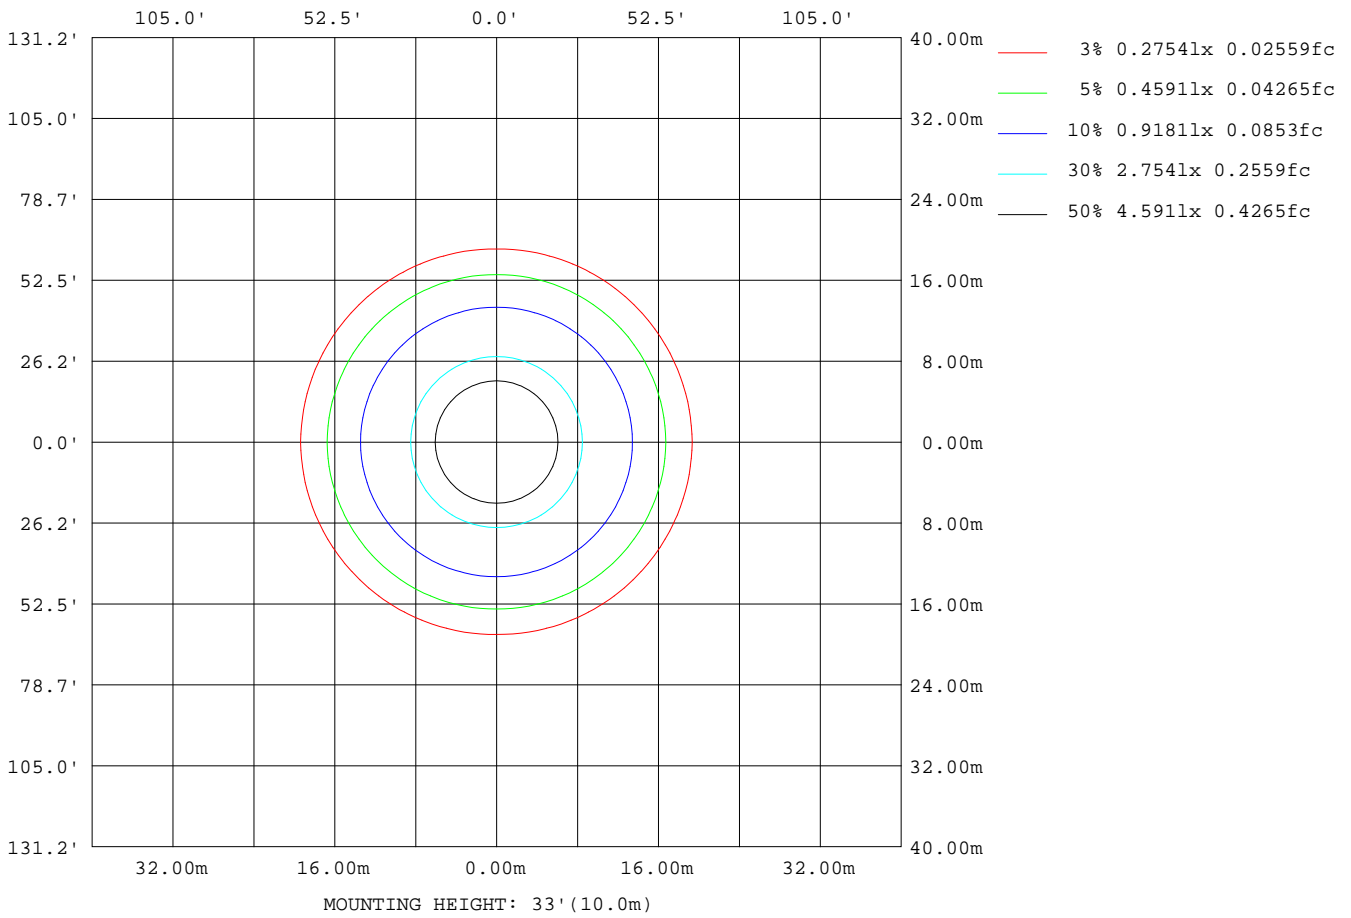

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:230.19V I:0.0773A P:16.895W PF:0.9394 Freq:49.99Hz UTHDi:0.25% ITHDi:20.38% KDisp:0.9589 Lamp Flux:2281.42x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	34553
L_0~180(75)av	23328
L_0~180(85)av	10509
L_90~270(65)av	32124
L_90~270(75)av	18449
L_90~270(85)av	6002
L_45(65)av	33048
L_45(75)av	20296
L_45(85)av	7739

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks:

Planar Illuminance Curve

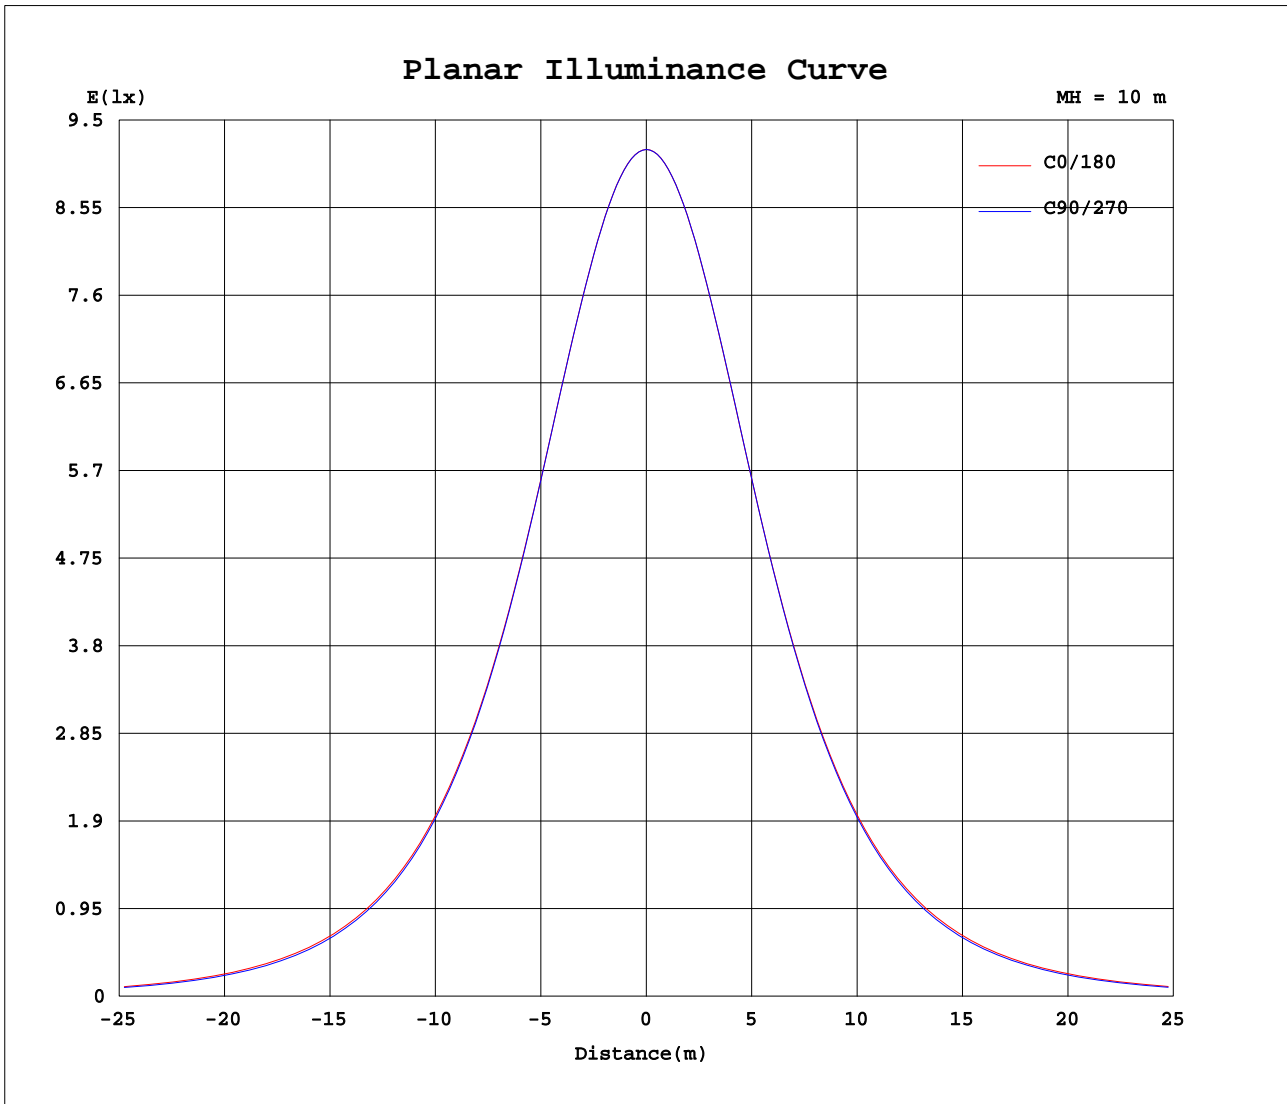

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.19V I:0.0773A P:16.895W PF:0.9394 Freq:49.99Hz UTHDi:0.25% ITHDi:20.38% KDisp:0.9589 Lamp Flux:2281.42x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	90	180	270															
0	918	918	918	918															
5	913	913	913	914															
10	898	898	899	899															
15	874	874	875	876															
20	841	841	842	843															
25	798	797	799	800															
30	746	744	748	747															
35	687	684	689	687															
40	623	617	625	621															
45	553	545	556	549															
50	480	469	483	473															
55	403	390	407	394															
60	325	308	328	313															
65	247	229	250	233															
70	171	151	174	155															
75	101	79.9	104	82.4															
80	42.5	28.4	43.8	29.6															
85	14.5	8.55	16.7	9.23															
90	0.75	0.65	0.61	0.55															
95	0.92	0.91	0.85	0.71															
100	1.27	1.24	1.16	1.02															
105	1.66	1.63	1.53	1.38															
110	2.08	2.05	1.94	1.79															
115	2.55	2.51	2.36	2.22															
120	3.01	3.00	2.82	2.67															
125	3.50	3.47	3.28	3.13															
130	3.97	3.95	3.74	3.60															
135	4.42	4.41	4.19	4.07															
140	4.84	4.86	4.63	4.52															
145	5.22	5.26	5.04	4.95															
150	5.58	5.61	5.41	5.33															
155	5.93	5.99	5.78	5.71															
160	6.23	6.31	6.11	6.05															
165	6.49	6.55	6.39	6.33															
170	6.67	6.72	6.62	6.56															
175	6.82	6.86	6.80	6.73															
180	6.87	6.88	6.86	6.84															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks: