
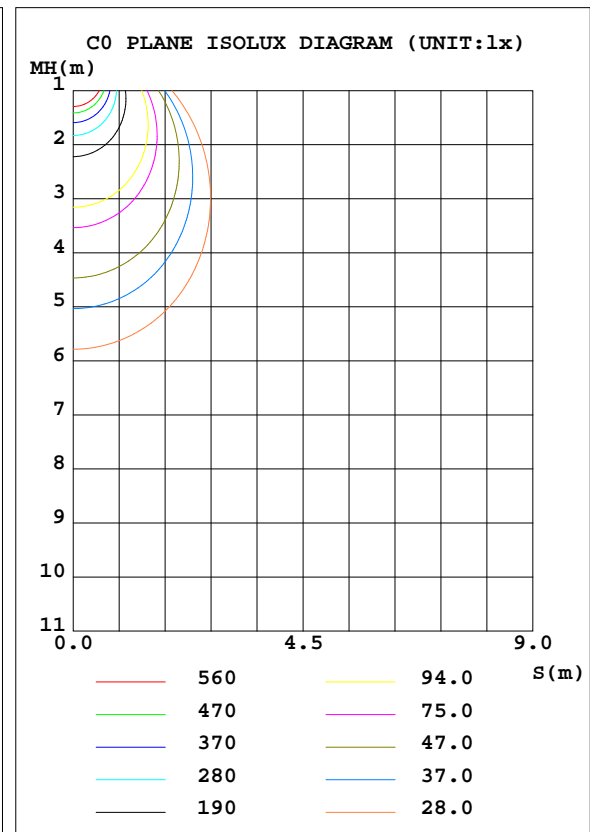


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.18V I:0.0793A P:17.526W PF:0.9431 Freq:49.99Hz UTHDi:0.25% ITHDi:18.95% KDisp:0.9603 Lamp Flux:2329.25x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 132.90 lm/W			
MODEL	D18W-CC 4000K	I _{max} (cd)	936.8	S/MH(C0/180)	1.22
NOMINAL POWER(W)	18	LOR(%)	100.0	S/MH(C90/270)	1.21
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	2329.2	η UP, DN(C0-180)	0.4,49.5
NOMINAL FLUX(lm)	2329.25	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.4,49.7
LAMPS INSIDE	1	η up(%)	0.9	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230.0	η down(%)	99.1	CIBSE SHR MAX	1.35

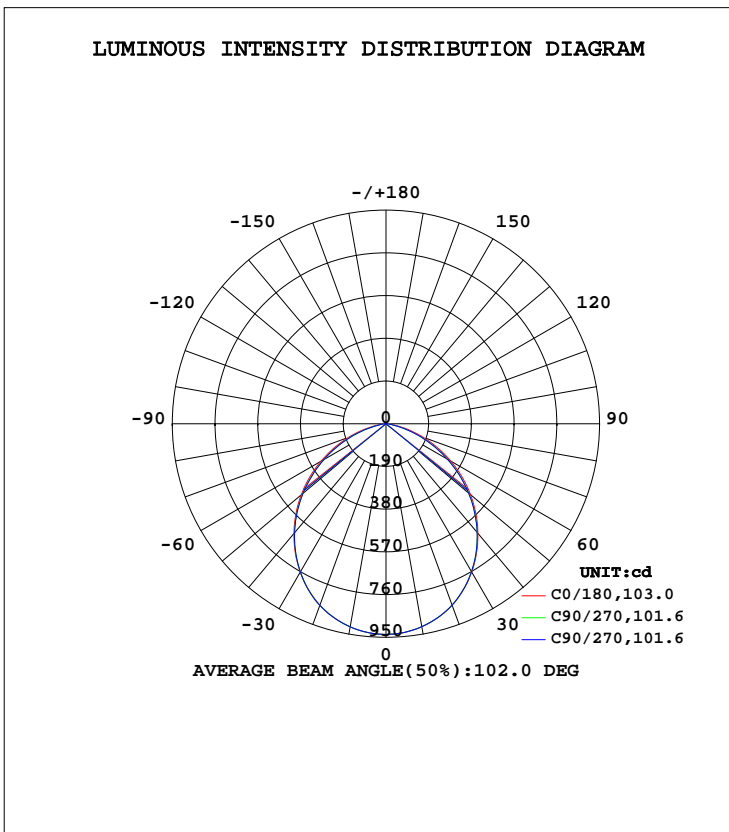

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270				γ	Φ zone	Φ total	%lum, lamp
10	916.8	916.6	917.2	917.4				0- 10	88.48	88.48	3.8,3.8
20	858.9	859.0	859.5	860.2				10- 20	251.8	340.2	14.6,14.6
30	762.0	760.3	762.6	762.0				20- 30	375.1	715.3	30.7,30.7
40	636.3	630.7	637.2	632.8				30- 40	438.1	1153	49.5,49.5
50	490.9	480.0	492.3	482.2				40- 50	433.3	1587	68.1,68.1
60	332.7	316.1	334.0	319.2				50- 60	363.3	1950	83.7,83.7
70	175.7	155.4	177.5	157.8				60- 70	242.3	2192	94.1,94.1
80	43.63	29.15	44.54	30.15				70- 80	101.5	2294	98.5,98.5
90	0.7745	0.6629	0.6217	0.5640				80- 90	15.32	2309	99.1,99.1
100	1.288	1.260	1.183	1.038				90-100	0.9609	2310	99.2,99.2
110	2.116	2.079	1.988	1.825				100-110	1.676	2312	99.3,99.3
120	3.072	3.047	2.876	2.725				110-120	2.434	2314	99.4,99.4
130	4.042	4.031	3.814	3.674				120-130	3.052	2317	99.5,99.5
140	4.933	4.948	4.721	4.612				130-140	3.360	2321	99.6,99.6
150	5.690	5.719	5.520	5.437				140-150	3.262	2324	99.8,99.8
160	6.347	6.428	6.230	6.159				150-160	2.747	2327	99.9,99.9
170	6.813	6.852	6.730	6.690				160-170	1.849	2329	100,100
180	7.010	7.025	7.016	6.959				170-180	0.6567	2329	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

Conical surface Flux(90deg): 1374.9 lm

%lum = 59.0%
 %lamp = 59.0%

Conical surface Flux(120deg): 1950.1 lm

%lum = 83.7%
 %lamp = 83.7%

0 - 45 DEG Zonal Flux:1374.9 %lum: 59.0%
 0 - 60 DEG Zonal Flux:1950.1 %lum: 83.7%


All measured values may vary less than 35 %
 from the average measured value in the 0 to 130 deg. zone: 12.2%
 All measured values in the 0 to 130 deg. zone
 may vary less than 50% from the average value of itself: 17.2%

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.18V I:0.0793A P:17.526W PF:0.9431 Freq:49.99Hz UTHDi:0.25% ITHDi:18.95% KDisp:0.9603 Lamp Flux:2329.25x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:

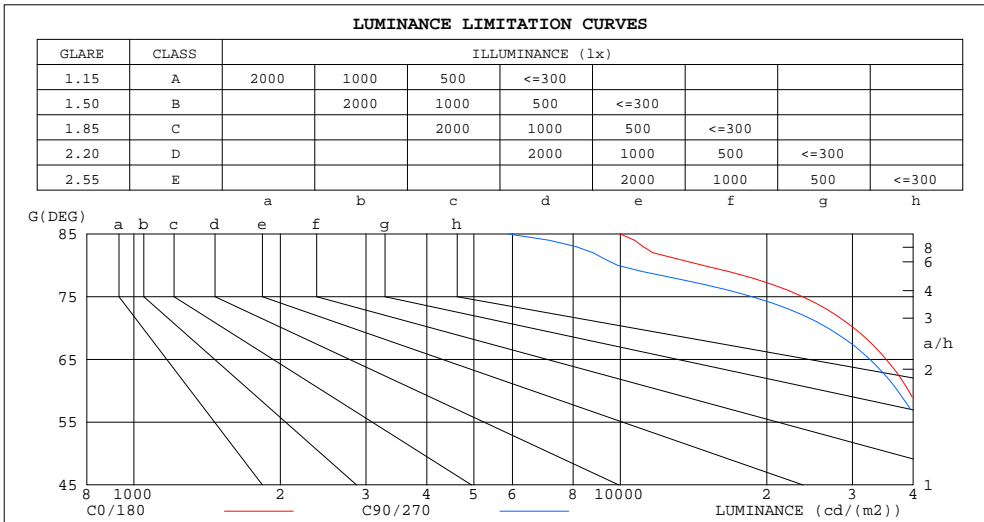

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	10005	5893
80	14783	9874
75	23711	18655
70	30225	26714
65	35206	32612
60	39153	37176
55	42337	40951
50	44936	43918
45	47050	46368


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.18V I:0.0793A P:17.526W PF:0.9431 Freq:49.99Hz UTHDi:0.25% ITHDi:18.95% KDisp:0.9603 Lamp Flux:2329.25x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.05	1.02	.98	1.03	.90	.96	.99	.96	.93	.95	.92	.90	.91	.89	.87	.85
2.0	.93	.86	.81	.91	.85	.80	.87	.82	.78	.84	.80	.76	.81	.77	.74	.72
3.0	.82	.74	.68	.80	.73	.68	.77	.71	.66	.75	.69	.65	.72	.68	.64	.62
4.0	.73	.65	.58	.72	.64	.58	.69	.62	.57	.67	.61	.56	.65	.60	.55	.53
5.0	.66	.57	.51	.64	.56	.50	.62	.55	.50	.60	.54	.49	.58	.53	.49	.46
6.0	.59	.51	.44	.58	.50	.44	.56	.49	.44	.55	.48	.43	.53	.47	.43	.41
7.0	.54	.45	.39	.53	.45	.39	.51	.44	.39	.50	.43	.39	.48	.43	.38	.36
8.0	.49	.41	.35	.48	.41	.35	.47	.40	.35	.46	.39	.35	.45	.39	.34	.33
9.0	.45	.37	.32	.45	.37	.32	.43	.36	.32	.42	.36	.31	.41	.35	.31	.29
10.0	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.38	.33	.28	.27

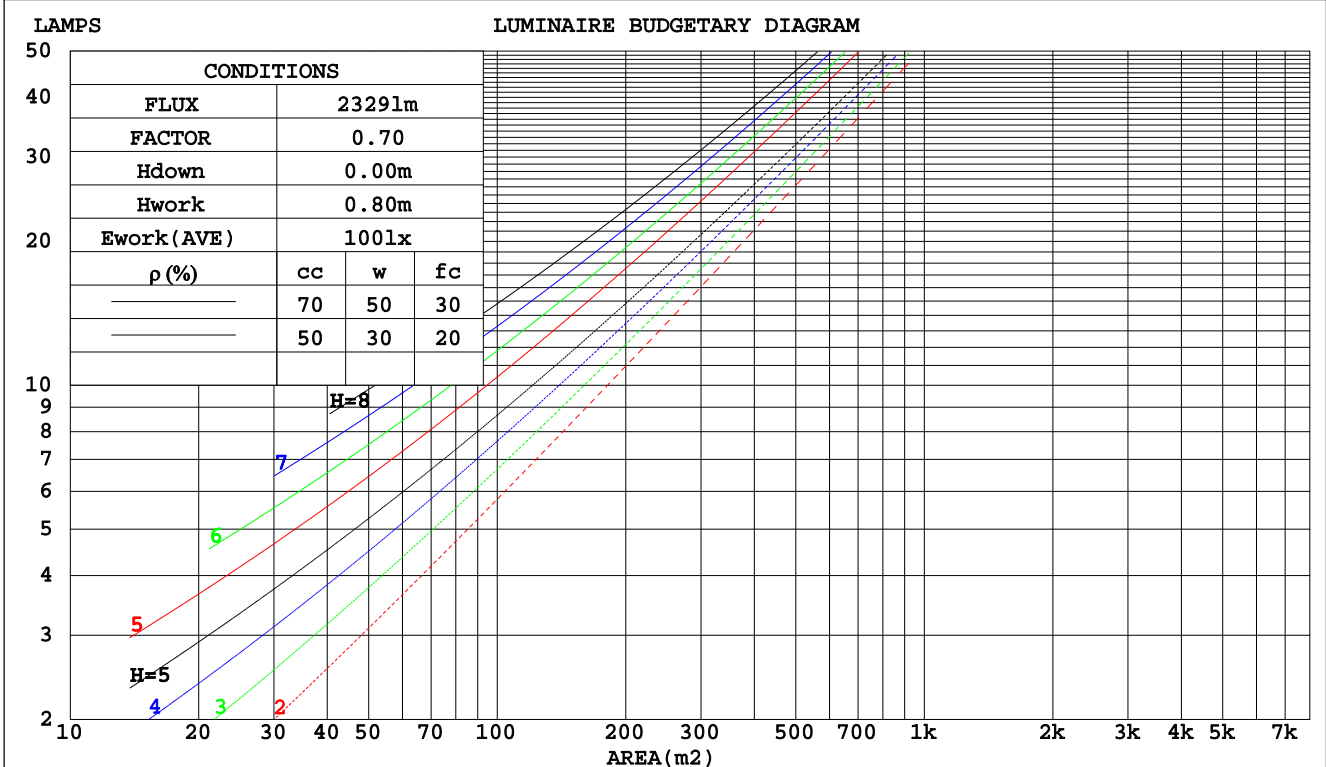

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:230.18V I:0.0793A P:17.526W PF:0.9431 Freq:49.99Hz UTHDi:0.25% ITHDi:18.95% KDisp:0.9603 Lamp Flux:2329.25x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.277	.158	.050	.270	.154	.049	.256	.147	.047	.244	.141	.045	.232	.135	.043	
2.0	.267	.146	.045	.261	.144	.044	.249	.138	.043	.238	.134	.042	.228	.129	.041	
3.0	.251	.134	.040	.246	.132	.040	.235	.127	.039	.225	.123	.038	.216	.120	.037	
4.0	.234	.122	.036	.230	.120	.036	.220	.117	.035	.211	.114	.034	.203	.111	.034	
5.0	.219	.111	.032	.214	.110	.032	.206	.107	.032	.198	.105	.031	.191	.102	.031	
6.0	.204	.102	.029	.200	.101	.029	.193	.099	.029	.186	.097	.028	.179	.094	.028	
7.0	.191	.094	.027	.187	.093	.027	.181	.091	.026	.175	.089	.026	.169	.088	.026	
8.0	.179	.088	.025	.176	.087	.024	.170	.085	.024	.164	.083	.024	.159	.082	.024	
9.0	.168	.081	.023	.166	.081	.023	.160	.079	.022	.155	.078	.022	.150	.076	.022	
10.0	.159	.076	.021	.156	.075	.021	.151	.074	.021	.147	.073	.021	.142	.072	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.197	.197	.197	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.185	.163	.144	.158	.140	.124	.108	.096	.085	.062	.056	.050	.020	.018	.016	
2.0	.176	.139	.108	.150	.119	.093	.103	.083	.065	.059	.048	.038	.019	.016	.012	
3.0	.168	.121	.084	.144	.104	.073	.099	.072	.051	.057	.042	.030	.018	.014	.010	
4.0	.160	.107	.067	.137	.093	.058	.094	.065	.041	.055	.038	.024	.018	.012	.008	
5.0	.153	.097	.056	.131	.084	.048	.090	.059	.034	.052	.034	.020	.017	.011	.007	
6.0	.146	.088	.047	.125	.077	.041	.086	.054	.029	.050	.032	.017	.016	.010	.006	
7.0	.139	.081	.041	.120	.071	.036	.083	.050	.025	.048	.029	.015	.016	.010	.005	
8.0	.133	.076	.036	.115	.066	.032	.079	.046	.022	.046	.027	.013	.015	.009	.004	
9.0	.127	.071	.033	.110	.061	.028	.076	.043	.020	.044	.025	.012	.014	.008	.004	
10.0	.122	.066	.030	.105	.058	.026	.073	.041	.018	.042	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.18V I:0.0793A P:17.526W PF:0.9431 Freq:49.99Hz UTHDi:0.25% ITHDi:18.95% KDisp:0.9603 Lamp Flux:2329.25x1 lm										
NAME: D18W-CC 4000K			TYPE: 18W			WEIGHT:				
SPEC.: 5700K			DIM.:			SERIAL No.: 1				
MFR.:			SUR.: 0.017			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.8	24.2	23.0	24.4	24.6	22.6	24.1	22.9	24.3	24.5
3H	23.9	25.2	24.2	25.4	25.7	23.6	24.9	23.9	25.2	25.4
4H	24.2	25.4	24.5	25.7	26.0	23.8	25.1	24.1	25.3	25.6
6H	24.3	25.5	24.6	25.7	26.0	23.8	25.0	24.2	25.3	25.6
8H	24.3	25.4	24.6	25.7	26.0	23.8	24.9	24.2	25.2	25.5
12H	24.2	25.3	24.6	25.6	26.0	23.8	24.9	24.1	25.2	25.5
4H 2H	23.2	24.5	23.5	24.7	25.0	23.1	24.3	23.4	24.6	24.9
3H	24.5	25.5	24.8	25.8	26.2	24.2	25.3	24.6	25.6	25.9
4H	24.8	25.8	25.2	26.2	26.5	24.5	25.5	24.9	25.8	26.2
6H	25.0	25.9	25.4	26.2	26.6	24.6	25.5	25.0	25.8	26.2
8H	25.0	25.8	25.4	26.2	26.6	24.6	25.4	25.0	25.8	26.2
12H	25.0	25.8	25.5	26.2	26.6	24.5	25.3	25.0	25.7	26.1
8H 4H	24.9	25.7	25.3	26.1	26.5	24.6	25.4	25.0	25.8	26.2
6H	25.1	25.8	25.6	26.2	26.7	24.7	25.4	25.2	25.8	26.2
8H	25.2	25.8	25.6	26.2	26.7	24.7	25.3	25.2	25.8	26.2
12H	25.2	25.7	25.7	26.2	26.6	24.7	25.2	25.2	25.7	26.2
12H 4H	24.9	25.6	25.3	26.0	26.4	24.6	25.3	25.0	25.7	26.1
6H	25.1	25.7	25.6	26.1	26.6	24.7	25.3	25.2	25.7	26.2
8H	25.2	25.7	25.7	26.1	26.6	24.7	25.2	25.2	25.7	26.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.4				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.5 / - 0.4					+ 0.5 / - 0.5				

CIE Pub.117, 2329 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.9)
Area: 0.017 m2

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-01-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.600m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.18V I:0.0793A P:17.526W PF:0.9431 Freq:49.99Hz UTHDi:0.25% ITHDi:18.95% KDisp:0.9603 Lamp Flux:2329.25x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	60	49	42	59	49	42	58	48	42	36
0.80	70	59	52	69	59	52	68	58	52	45
1.00	79	68	62	78	68	61	75	69	61	54
1.25	86	76	69	84	75	69	82	74	68	61
1.50	91	82	75	89	81	75	86	79	73	66
2.00	97	89	83	95	88	83	92	86	81	74
2.50	101	94	88	99	92	87	95	90	85	77
3.00	104	98	93	102	96	92	98	93	89	81
4.00	108	102	98	105	101	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.18V I:0.0793A P:17.526W PF:0.9431 Freq:49.99Hz UTHDi:0.25% ITHDi:18.95% KDisp:0.9603 Lamp Flux:2329.25x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:

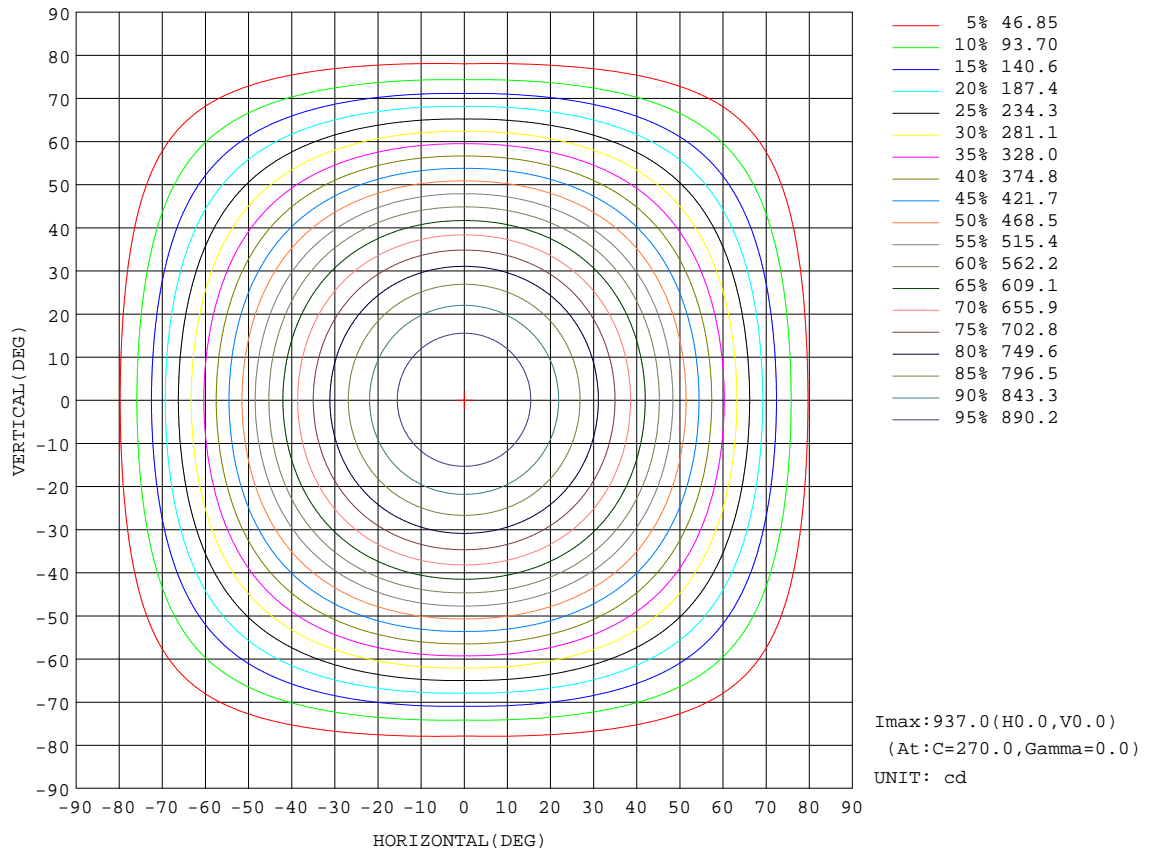


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.600m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.18V I:0.0793A P:17.526W PF:0.9431 Freq:49.99Hz UTHDi:0.25% ITHDi:18.95% KDisp:0.9603 Lamp Flux:2329.25x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:

Flux out:1950 lm

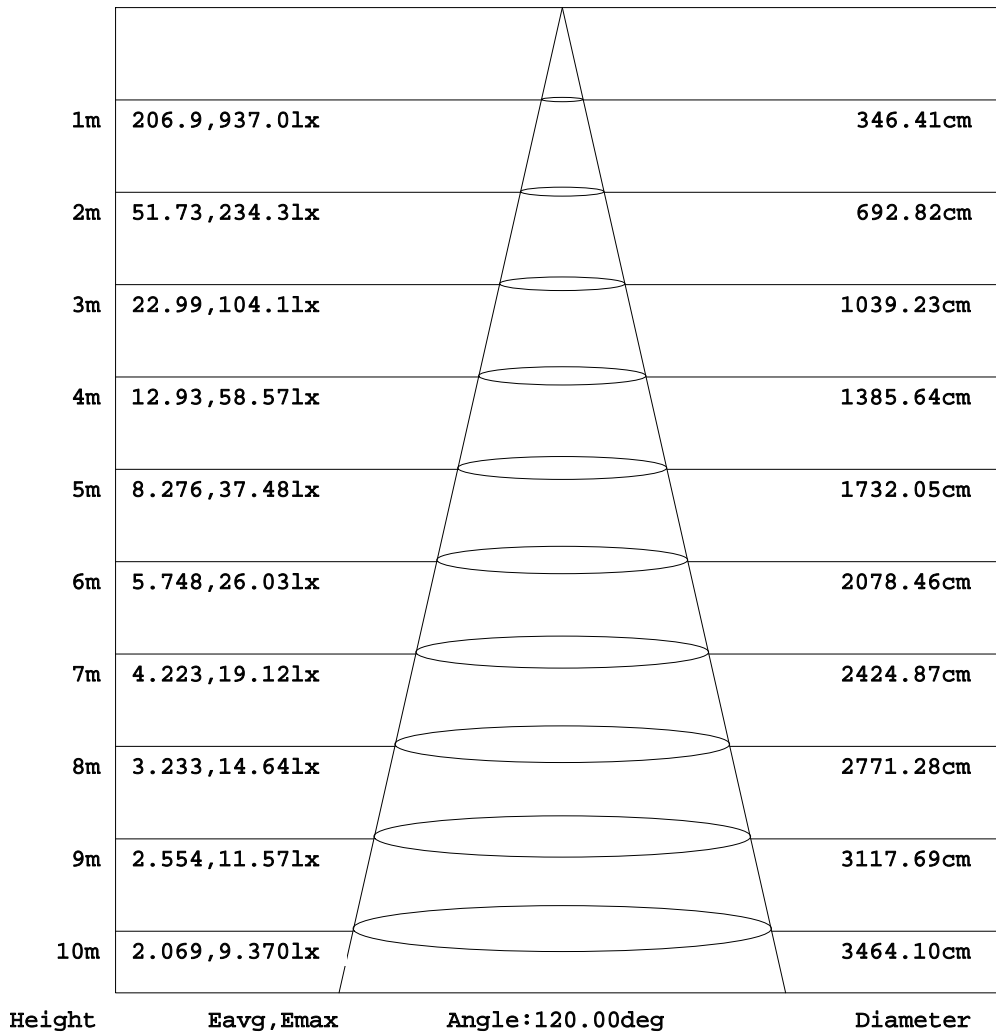


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-01-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 8.600m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.18V I:0.0793A P:17.526W PF:0.9431 Freq:49.99Hz UTHDi:0.25% ITHDi:18.95% KDisp:0.9603 Lamp Flux:2329.25x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:

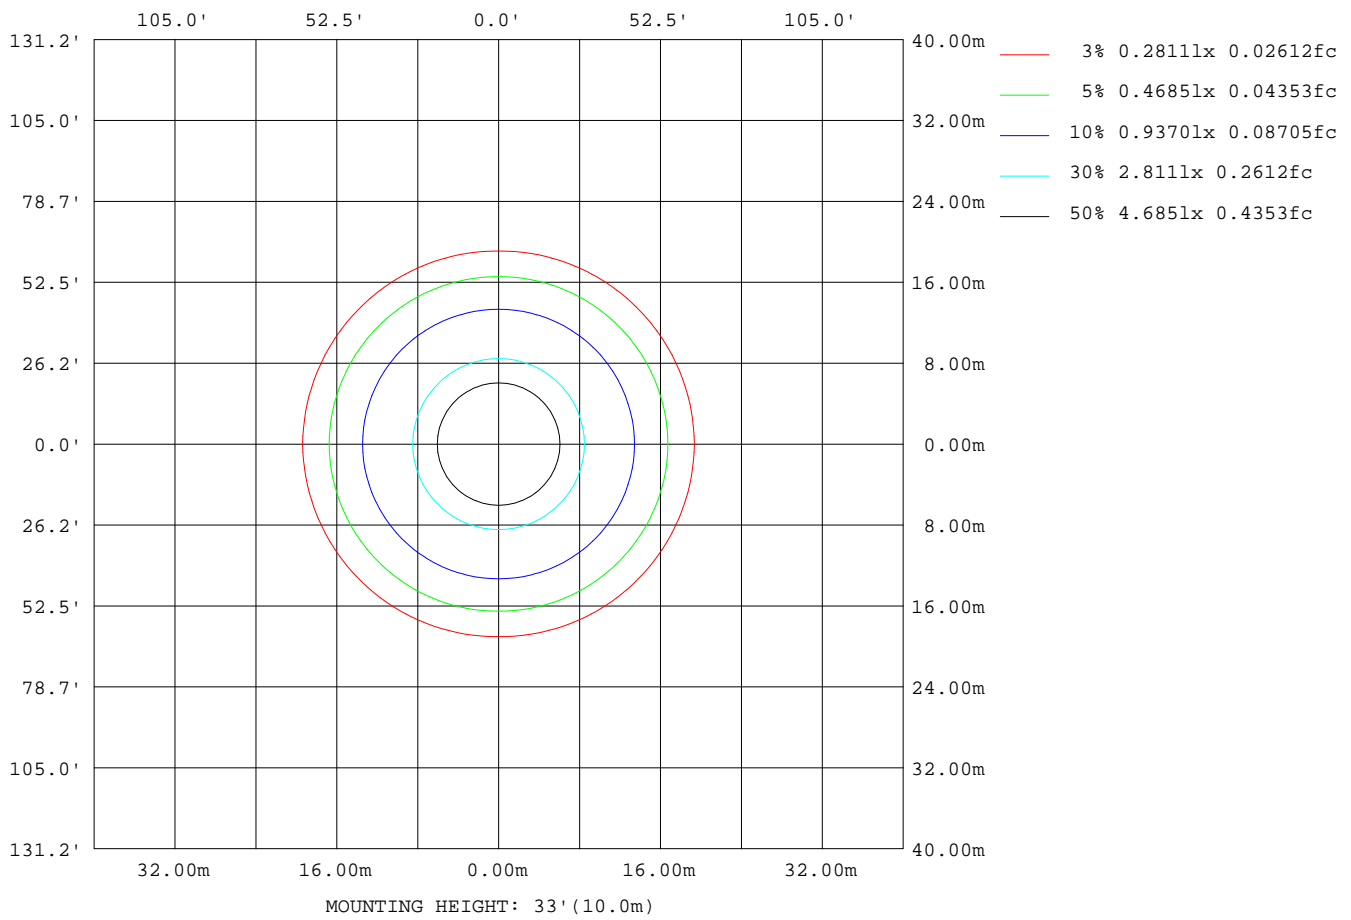

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:230.18V I:0.0793A P:17.526W PF:0.9431 Freq:49.99Hz UTHDi:0.25% ITHDi:18.95% KDisp:0.9603 Lamp Flux:2329.25x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	35305
L_0~180(75)av	23890
L_0~180(85)av	10735
L_90~270(65)av	32840
L_90~270(75)av	18860
L_90~270(85)av	6125
L_45(65)av	33772
L_45(75)av	20758
L_45(85)av	7900

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks:

Planar Illuminance Curve

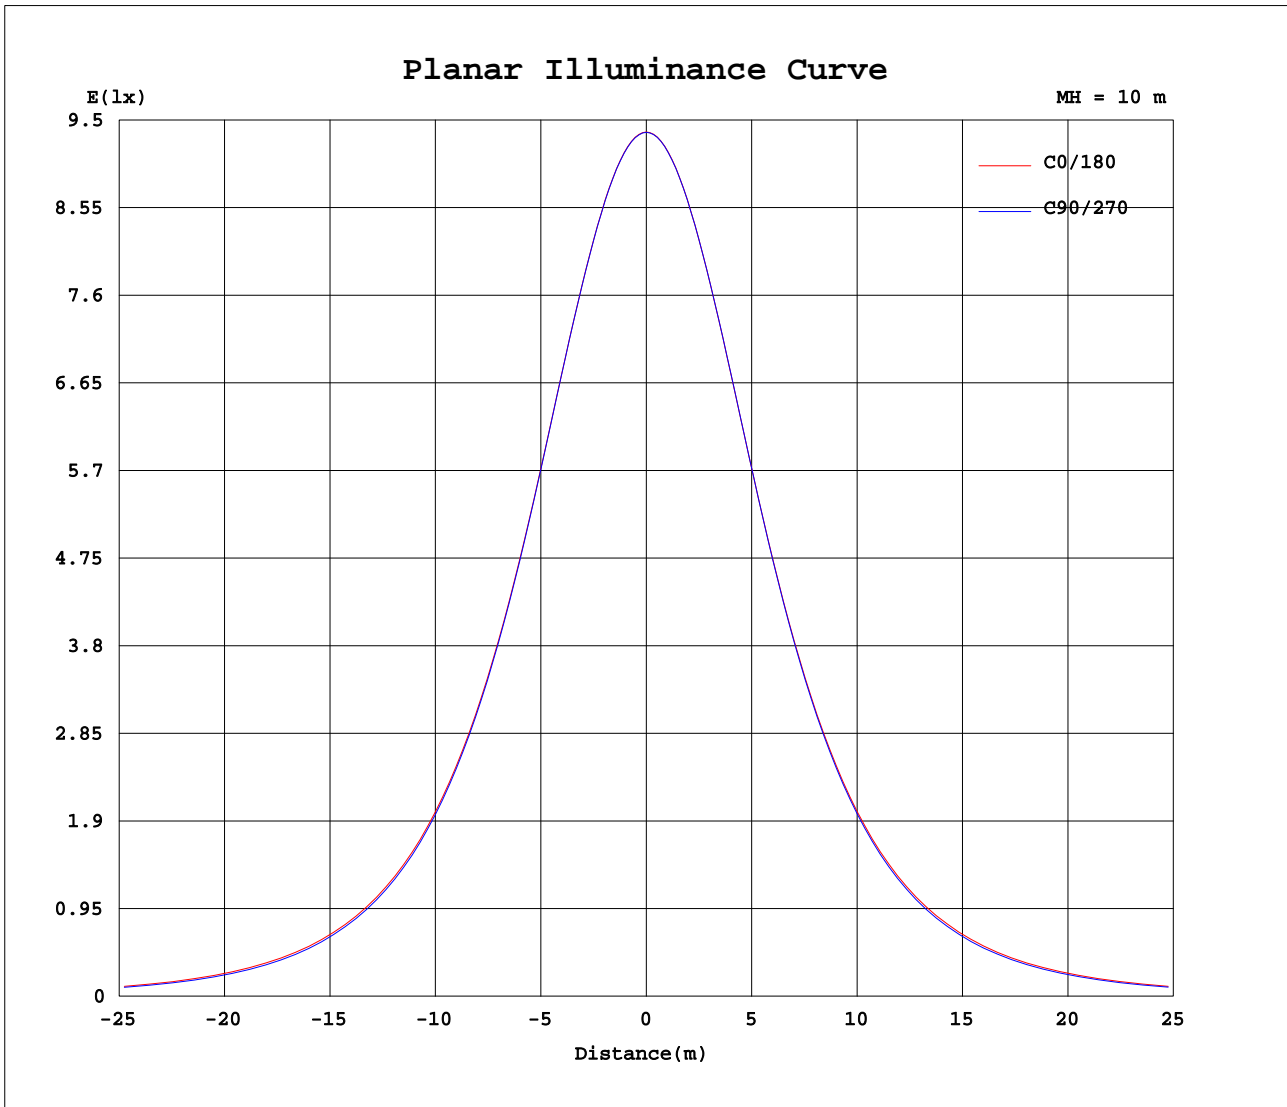

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.18V I:0.0793A P:17.526W PF:0.9431 Freq:49.99Hz UTHDi:0.25% ITHDi:18.95% KDisp:0.9603 Lamp Flux:2329.25x1 lm		
NAME: D18W-CC 4000K	TYPE: 18W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.017	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	90	180	270															
0	937	937	937	937															
5	932	932	932	932															
10	917	917	917	917															
15	892	892	893	894															
20	859	859	859	860															
25	815	814	815	816															
30	762	760	763	762															
35	702	699	703	700															
40	636	631	637	633															
45	565	557	566	560															
50	491	480	492	482															
55	413	399	415	401															
60	333	316	334	319															
65	253	234	254	238															
70	176	155	177	158															
75	104	82.1	106	83.9															
80	43.6	29.2	44.5	30.1															
85	14.8	8.73	17.0	9.42															
90	0.77	0.66	0.62	0.56															
95	0.94	0.92	0.87	0.73															
100	1.29	1.26	1.18	1.04															
105	1.69	1.66	1.56	1.41															
110	2.12	2.08	1.99	1.82															
115	2.59	2.56	2.41	2.26															
120	3.07	3.05	2.88	2.73															
125	3.57	3.54	3.35	3.20															
130	4.04	4.03	3.81	3.67															
135	4.50	4.49	4.28	4.15															
140	4.93	4.95	4.72	4.61															
145	5.32	5.35	5.14	5.04															
150	5.69	5.72	5.52	5.44															
155	6.05	6.11	5.89	5.82															
160	6.35	6.43	6.23	6.16															
165	6.61	6.67	6.52	6.46															
170	6.81	6.85	6.73	6.69															
175	6.96	7.00	6.92	6.86															
180	7.01	7.02	7.02	6.96															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks: