
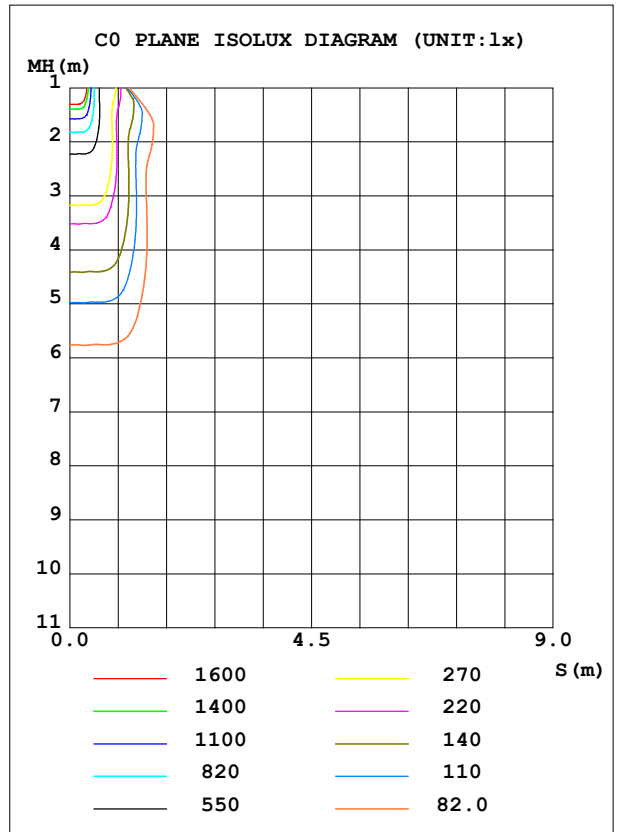


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.55V I:0.1083A P:25.142W PF:0.9654 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2246.54x1 lm		
Name: LED-SN25W-CC	Type: 25W	Weight:
SPEC.: 5000K	DIM.:	Instrument No.:
MFR.: EVERFINE	SUR.: 0.0535	shielding angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	LED-SN25W-CC	Imax (cd)	2894	S/MH (C0/180)	0.70
NOMINAL POWER (W)	25	LOR (%)	100.0	S/MH (C90/270)	0.72
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	2246.5	$\eta$ UP, DN (C0-180)	0.0,49.9
NOMINAL FLUX (lm)	2246.54	CIE CLASS	DIRECT	$\eta$ UP, DN (C180-360)	0.0,50.1
LAMPS INSIDE	1	$\eta$ up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	240	$\eta$ down (%)	100.0	CIBSE SHR MAX	0.65

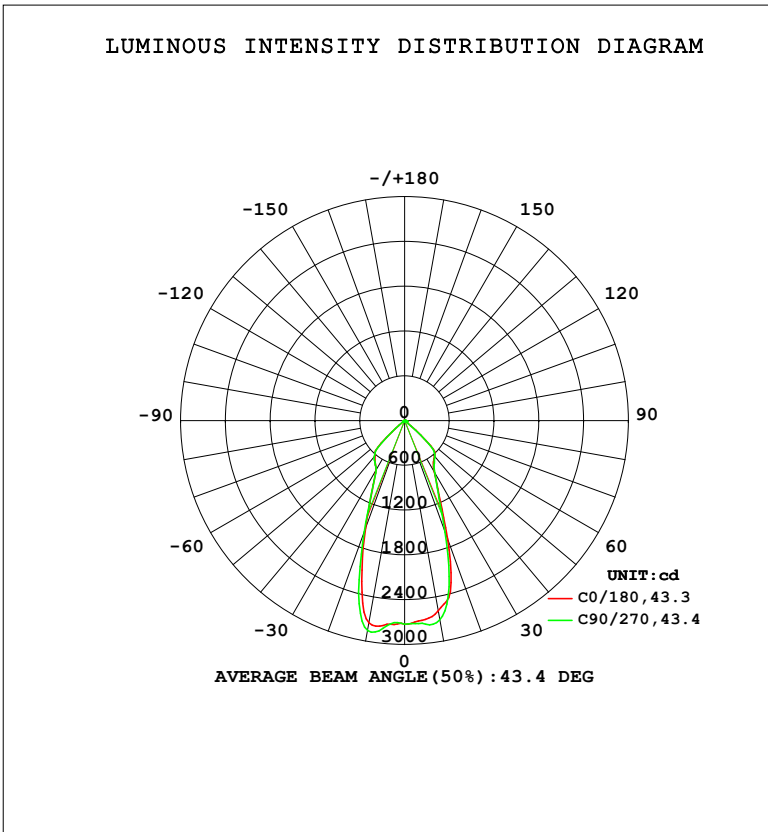

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2024-01-26

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.780m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	2753	2567	2857	2893	2591	2491	2713	2862	0- 10	260.7	260.7	11.6,11.6
20	1538	1603	1587	1646	1682	1617	1587	1478	10- 20	623.2	884.0	39.3,39.3
30	775.1	779.8	764.6	769.5	799.6	801.0	808.6	788.9	20- 30	499.2	1383	61.6,61.6
40	625.9	629.7	635.5	637.0	625.4	622.9	629.0	609.9	30- 40	433.8	1817	80.9,80.9
50	101.8	64.39	100.9	140.2	120.4	107.0	120.3	118.6	40- 50	342.7	2160	96.1,96.1
60	28.15	27.89	25.03	26.16	26.49	29.00	30.42	28.81	50- 60	31.64	2191	97.5,97.5
70	27.71	26.03	25.52	26.84	28.52	28.90	29.58	28.72	60- 70	27.60	2219	98.8,98.8
80	11.11	11.19	9.524	10.77	10.23	13.69	13.52	14.01	70- 80	21.35	2240	99.7,99.7
90	0.0618	0.0804	0.0620	0.0620	0.0928	0.2166	0.1487	0.2047	80- 90	6.328	2247	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2034.7 lm

%lum = 90.6%

%lamp = 90.6%

Conical surface Flux(120deg): 2191.3 lm

%lum = 97.5%


%lamp = 97.5%

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2024-01-26

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.780m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

<b>Test:U:240.55V I:0.1083A P:25.142W PF:0.9654 Freq:49.99Hz</b> <b>UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2246.54x1 lm</b>		
<b>Name: LED-SN25W-CC</b>	<b>Type: 25W</b>	<b>Weight:</b>
<b>SPEC.: 5000K</b>	<b>DIM.:</b>	<b>Instrument No.:</b>
<b>MFR.: EVERFINE</b>	<b>SUR.: 0.0535</b>	<b>shielding angle:</b>

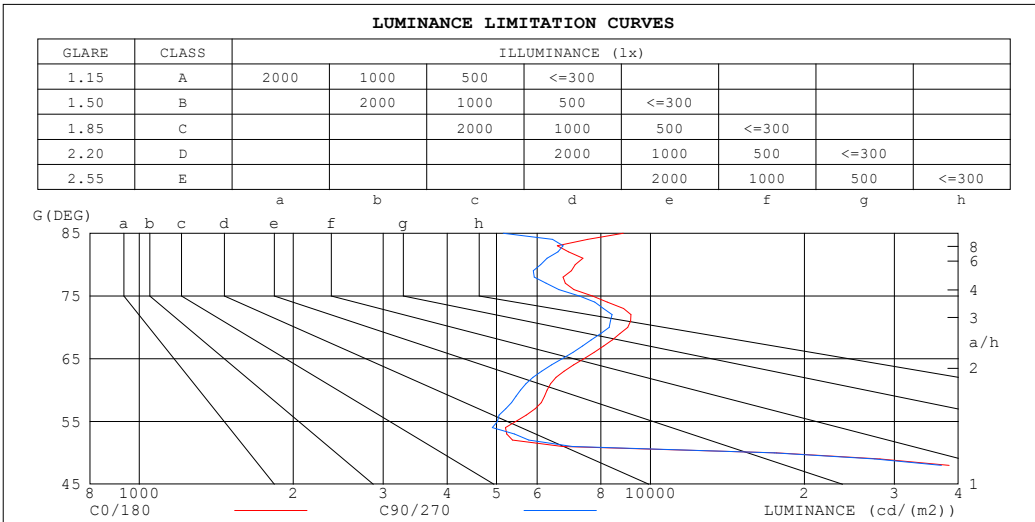

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	8847	5150
80	7127	6100
75	7698	7256
70	9025	8300
65	7404	6720
60	6272	5568
55	5448	5016
50	17639	17463
45	80521	78261


C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2024-01-26

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.780m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:240.55V I:0.1083A P:25.142W PF:0.9654 Freq:49.99Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:2246.54x1 lm		
Name: LED-SN25W-CC	Type: 25W	Weight:
SPEC.: 5000K	DIM.:	Instrument No.:
MFR.: EVERFINE	SUR.: 0.0535	shielding angle:

ρcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	
ρfc	20%			20%			20%			20%			20%			
RCR	RCR:Room Cavity Ratio      Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.10	1.07	1.05	1.08	1.05	1.03	1.04	1.02	.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.02	.97	.94	.00	.96	.92	.97	.93	.90	.94	.91	.88	.91	.89	.87	.85
3.0	.94	.89	.84	.93	.88	.84	.90	.86	.82	.88	.84	.81	.85	.82	.80	.78
4.0	.87	.81	.77	.86	.81	.76	.84	.79	.76	.82	.78	.75	.80	.77	.74	.72
5.0	.81	.75	.71	.80	.75	.70	.79	.74	.70	.77	.73	.69	.75	.72	.68	.67
6.0	.76	.70	.65	.75	.69	.65	.74	.68	.65	.72	.68	.64	.71	.67	.64	.62
7.0	.71	.65	.61	.71	.65	.60	.69	.64	.60	.68	.63	.60	.67	.63	.59	.58
8.0	.67	.61	.56	.66	.61	.56	.65	.60	.56	.64	.59	.56	.63	.59	.56	.54
9.0	.63	.57	.53	.63	.57	.53	.62	.56	.53	.61	.56	.52	.60	.56	.52	.51
10.0	.60	.54	.50	.59	.54	.50	.58	.53	.49	.58	.53	.49	.57	.52	.49	.48

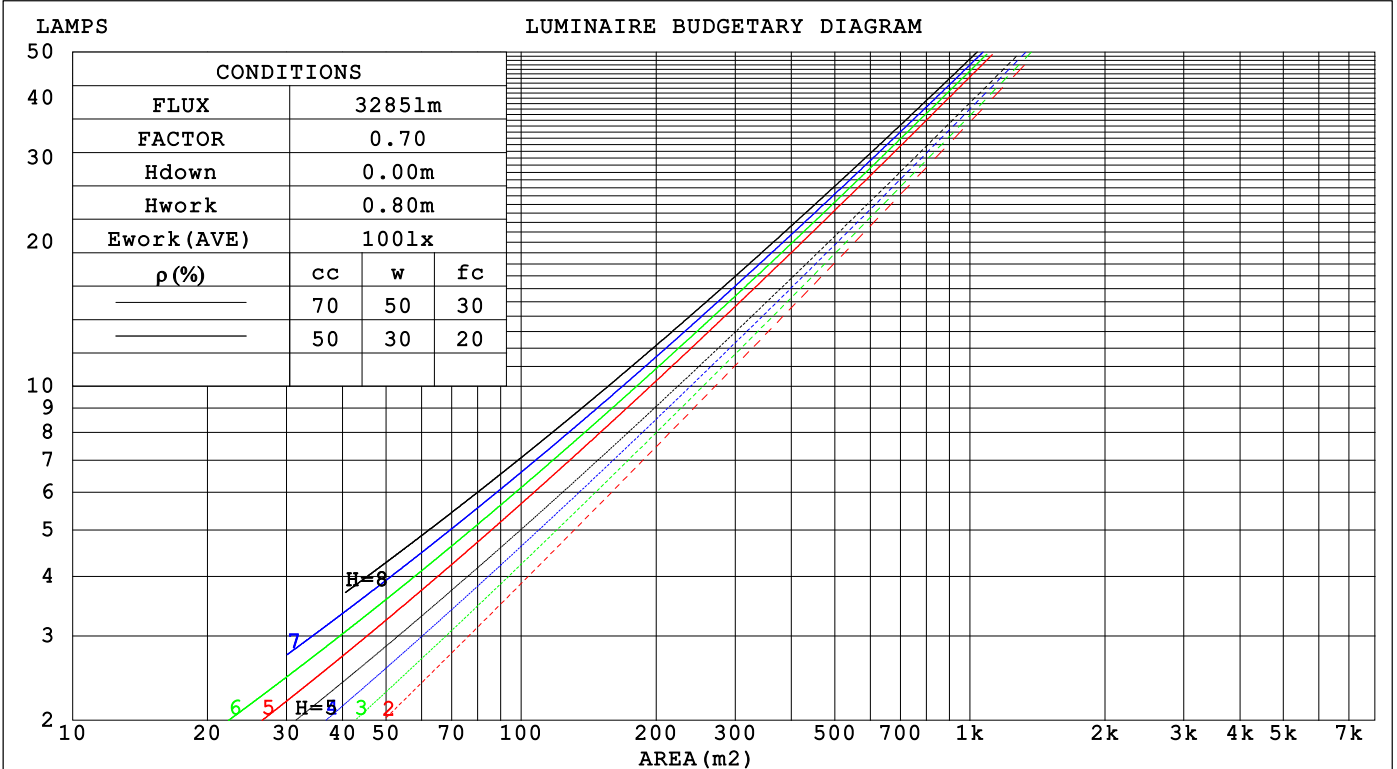

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2024-01-26

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.780m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:240.55V I:0.1083A P:25.142W PF:0.9654 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2246.54x1 lm		
Name: LED-SN25W-CC	Type: 25W	Weight:
SPEC.: 5000K	DIM.:	Instrument No.:
MFR.: EVERFINE	SUR.: 0.0535	shielding angle:

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.194	.110	.035	.187	.107	.034	.174	.100	.032	.163	.094	.030	.152	.088	.028	
2.0	.185	.101	.031	.179	.099	.030	.169	.094	.029	.159	.089	.028	.150	.085	.027	
3.0	.176	.094	.028	.171	.092	.028	.162	.088	.027	.153	.084	.026	.145	.080	.025	
4.0	.167	.087	.025	.162	.085	.025	.154	.082	.024	.147	.079	.024	.140	.076	.023	
5.0	.158	.081	.023	.154	.079	.023	.148	.077	.023	.141	.074	.022	.135	.072	.022	
6.0	.150	.075	.022	.147	.074	.021	.141	.072	.021	.135	.070	.021	.130	.068	.020	
7.0	.143	.071	.020	.140	.070	.020	.135	.068	.020	.130	.066	.019	.125	.065	.019	
8.0	.136	.067	.019	.134	.066	.019	.129	.064	.018	.124	.063	.018	.120	.062	.018	
9.0	.130	.063	.018	.128	.062	.017	.123	.061	.017	.119	.060	.017	.115	.059	.017	
10.0	.124	.060	.017	.122	.059	.016	.118	.058	.016	.115	.057	.016	.111	.056	.016	

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.172	.157	.144	.147	.135	.124	.101	.093	.085	.058	.054	.050	.019	.017	.016	
2.0	.158	.132	.111	.135	.114	.096	.093	.079	.067	.053	.046	.039	.017	.015	.013	
3.0	.146	.114	.088	.125	.098	.076	.086	.068	.053	.050	.040	.031	.016	.013	.010	
4.0	.137	.099	.071	.117	.086	.061	.081	.060	.043	.047	.035	.026	.015	.011	.008	
5.0	.128	.088	.058	.110	.076	.050	.076	.053	.036	.044	.031	.021	.014	.010	.007	
6.0	.121	.079	.048	.104	.068	.042	.072	.048	.030	.042	.028	.018	.013	.009	.006	
7.0	.114	.071	.041	.098	.062	.036	.068	.043	.025	.039	.025	.015	.013	.008	.005	
8.0	.109	.065	.035	.093	.056	.031	.065	.040	.022	.038	.023	.013	.012	.008	.004	
9.0	.103	.060	.030	.089	.052	.027	.062	.036	.019	.036	.022	.011	.012	.007	.004	
10.0	.099	.055	.027	.085	.048	.023	.059	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2024-01-26

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.780m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:240.55V I:0.1083A P:25.142W PF:0.9654 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2246.54x1 lm										
Name: LED-SN25W-CC					Type: 25W			Weight:		
SPEC.: 5000K					DIM.:			Instrument No.:		
MFR.: EVERFINE					SUR.: 0.0535			shielding angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.2	23.2	22.4	23.4	23.6	22.2	23.2	22.4	23.4	23.6
3H	22.2	23.1	22.5	23.3	23.6	22.2	23.1	22.4	23.3	23.5
4H	22.2	23.1	22.5	23.3	23.6	22.2	23.1	22.4	23.3	23.5
6H	22.2	23.0	22.5	23.3	23.5	22.1	23.0	22.4	23.2	23.5
8H	22.2	23.0	22.5	23.3	23.5	22.1	22.9	22.4	23.2	23.5
12H	22.2	23.0	22.5	23.2	23.5	22.1	22.9	22.4	23.2	23.4
4H 2H	22.0	22.9	22.3	23.1	23.3	22.0	22.9	22.3	23.1	23.3
3H	22.1	22.8	22.4	23.1	23.4	22.0	22.8	22.3	23.1	23.3
4H	22.1	22.8	22.5	23.1	23.5	22.1	22.8	22.4	23.1	23.4
6H	22.2	22.8	22.6	23.1	23.5	22.1	22.7	22.5	23.0	23.4
8H	22.2	22.8	22.6	23.1	23.5	22.1	22.7	22.5	23.0	23.4
12H	22.2	22.7	22.6	23.1	23.5	22.1	22.6	22.5	23.0	23.4
8H 4H	22.1	22.7	22.5	23.0	23.4	22.0	22.6	22.4	23.0	23.3
6H	22.2	22.7	22.6	23.1	23.5	22.1	22.6	22.5	23.0	23.4
8H	22.2	22.7	22.7	23.1	23.5	22.2	22.6	22.6	23.0	23.4
12H	22.3	22.7	22.8	23.1	23.6	22.2	22.5	22.7	23.0	23.5
12H 4H	22.1	22.6	22.5	23.0	23.3	22.0	22.5	22.4	22.9	23.3
6H	22.2	22.6	22.6	23.0	23.4	22.1	22.5	22.5	22.9	23.4
8H	22.2	22.6	22.7	23.0	23.5	22.2	22.5	22.6	23.0	23.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.7 / - 4.9					+ 2.8 / - 5.2				
1.5H	+ 2.6 / - 6.3					+ 2.4 / - 6.5				
2.0H	+ 6.8 / - 4.1					+ 6.8 / - 4.3				

CIE Pub.117, 2247 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.8)  
 Area: 0.008987 m2

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2024-01-26

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.780m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:240.55V I:0.1083A P:25.142W PF:0.9654 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2246.54x1 lm		
Name: LED-SN25W-CC	Type: 25W	Weight:
SPEC.: 5000K	DIM.:	Instrument No.:
MFR.: EVERFINE	SUR.: 0.0535	shielding angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	80	72	67	79	72	67	78	71	67	63
0.80	88	81	76	87	81	76	86	80	76	71
1.00	94	87	83	93	87	83	92	87	82	78
1.25	99	93	89	98	92	88	96	91	87	83
1.50	102	97	93	101	96	92	99	94	91	86
2.00	106	101	97	105	100	97	102	98	95	89
2.50	108	104	100	106	102	99	103	100	97	91
3.00	110	106	103	108	104	102	105	102	99	93
4.00	112	109	106	110	107	105	106	104	102	95
5.00	114	111	109	111	109	107	107	106	104	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2024-01-26

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.780m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.55V I:0.1083A P:25.142W PF:0.9654 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2246.54x1 lm		
Name: LED-SN25W-CC	Type: 25W	Weight:
SPEC.: 5000K	DIM.:	Instrument No.:
MFR.: EVERFINE	SUR.: 0.0535	shielding angle:

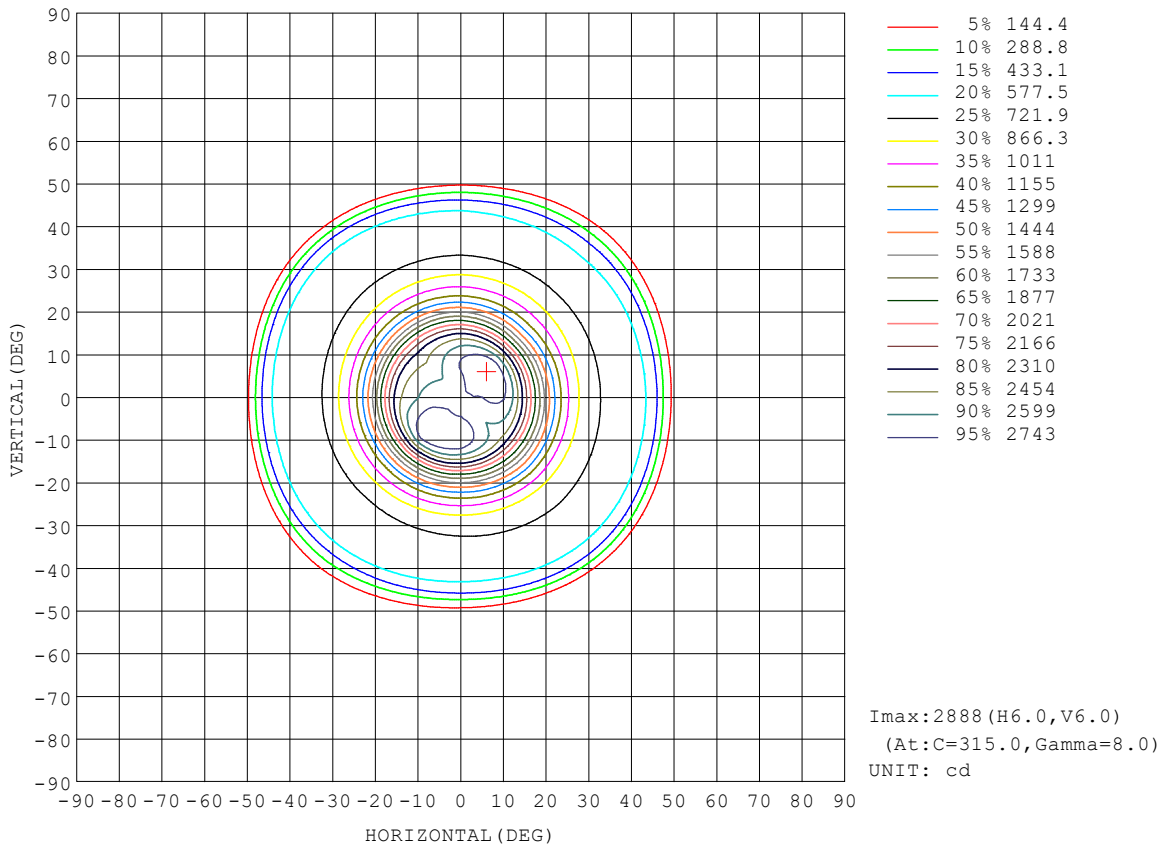


C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2024-01-26

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.780m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:240.55V I:0.1083A P:25.142W PF:0.9654 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2246.54x1 lm		
Name: LED-SN25W-CC	Type: 25W	Weight:
SPEC.: 5000K	DIM.:	Instrument No.:
MFR.: EVERFINE	SUR.: 0.0535	shielding angle:

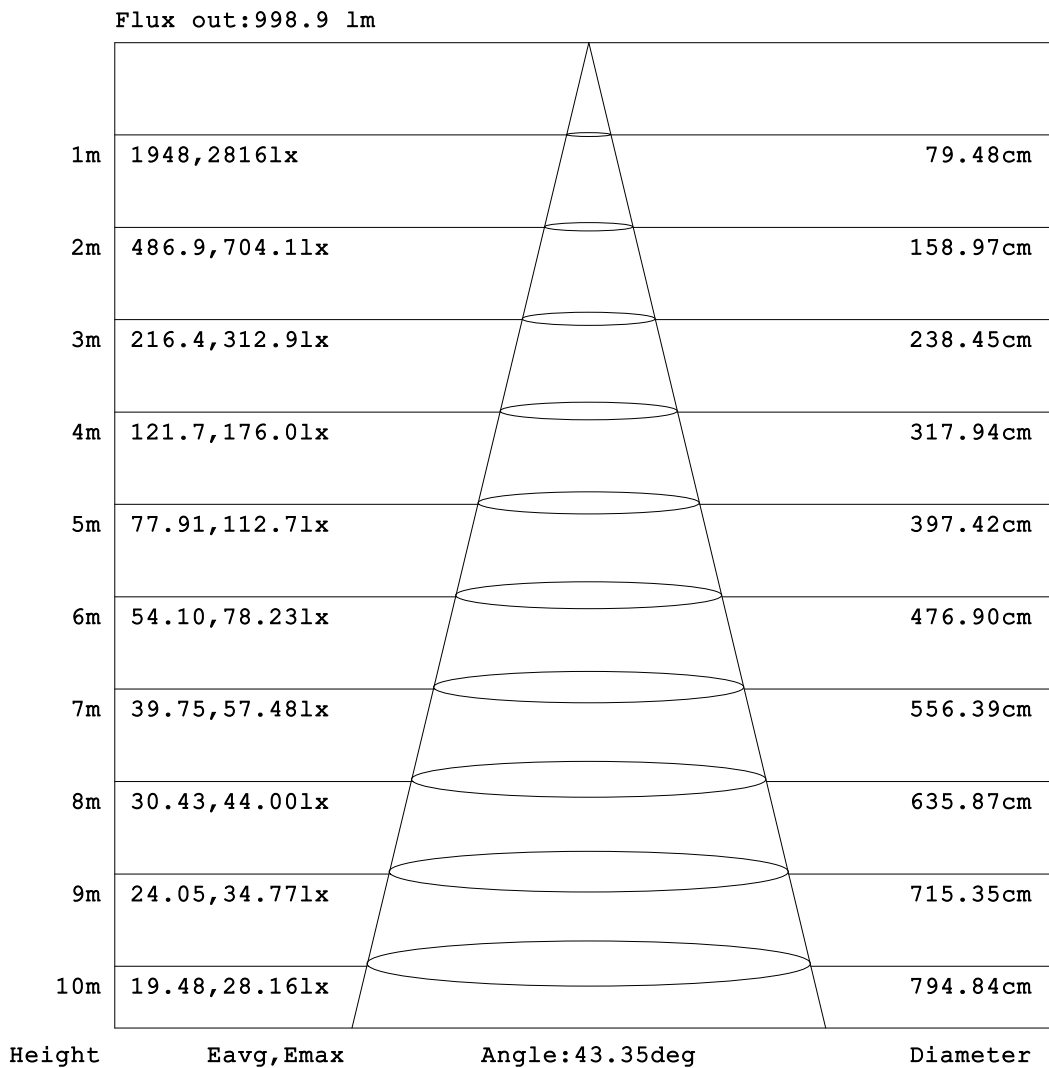


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3 °C  
 Operators:  
 Test Date:2024-01-26

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.780m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:240.55V I:0.1083A P:25.142W PF:0.9654 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2246.54x1 lm		
Name: LED-SN25W-CC	Type: 25W	Weight:
SPEC.: 5000K	DIM.:	Instrument No.:
MFR.: EVERFINE	SUR.: 0.0535	shielding angle:

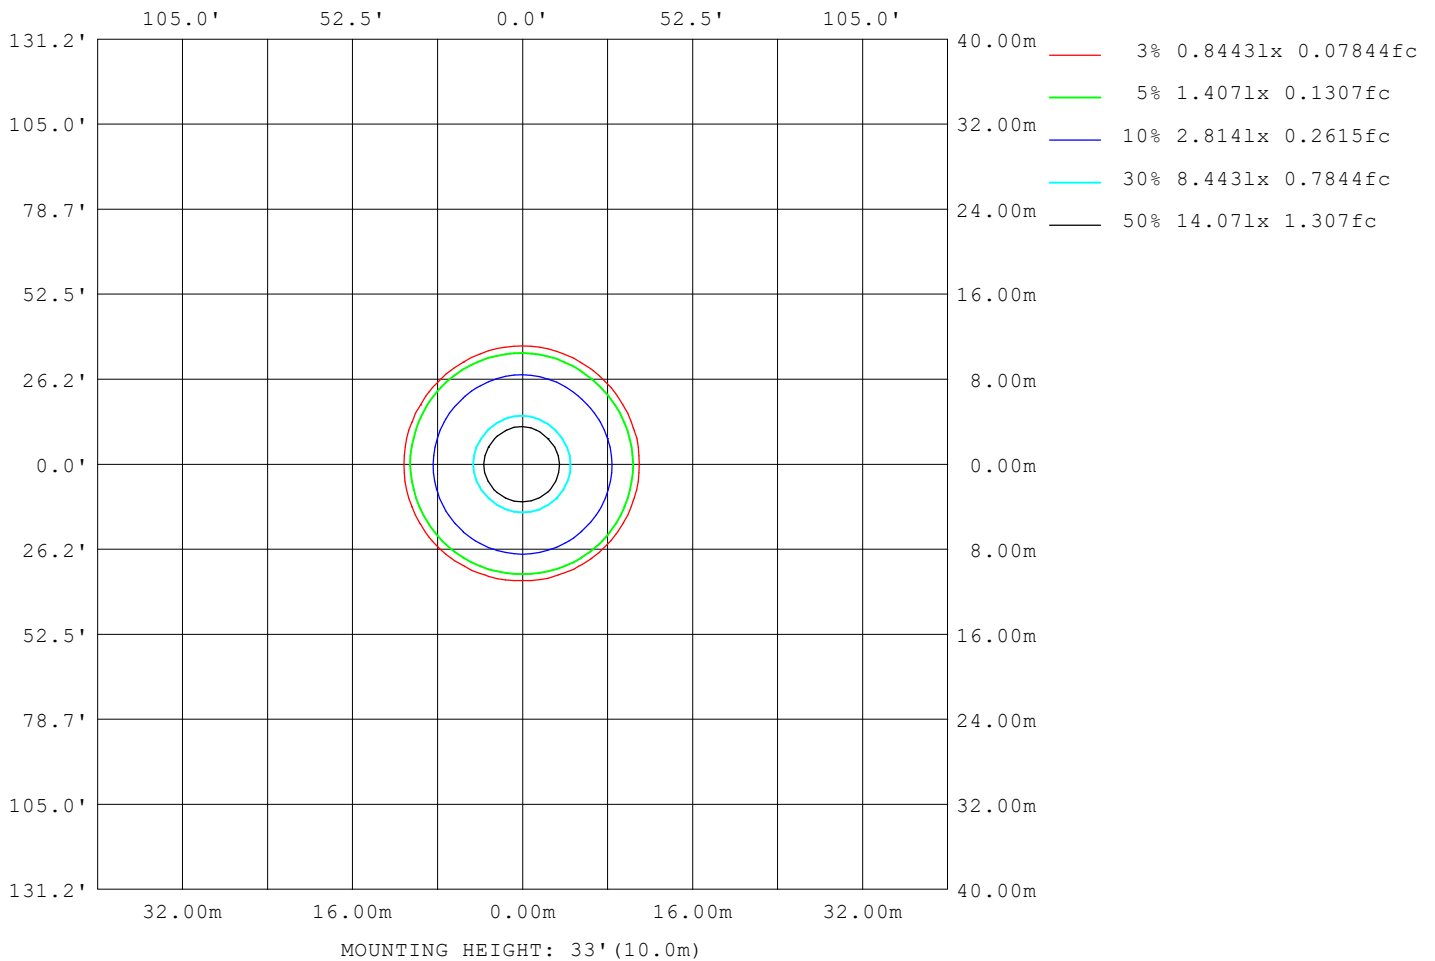

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2024-01-26

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.780m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:240.55V I:0.1083A P:25.142W PF:0.9654 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2246.54x1 lm		
Name: LED-SN25W-CC	Type: 25W	Weight:
SPEC.: 5000K	DIM.:	Instrument No.:
MFR.: EVERFINE	SUR.: 0.0535	shielding angle:


AvgL	cd/m2
L_0~180 (65) av	7469
L_0~180 (75) av	7806
L_0~180 (85) av	8215
L_90~270 (65) av	7325
L_90~270 (75) av	8665
L_90~270 (85) av	7660
L_45 (65) av	7281
L_45 (75) av	9390
L_45 (85) av	10080

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:  
 Test Date:2024-01-26

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.780m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

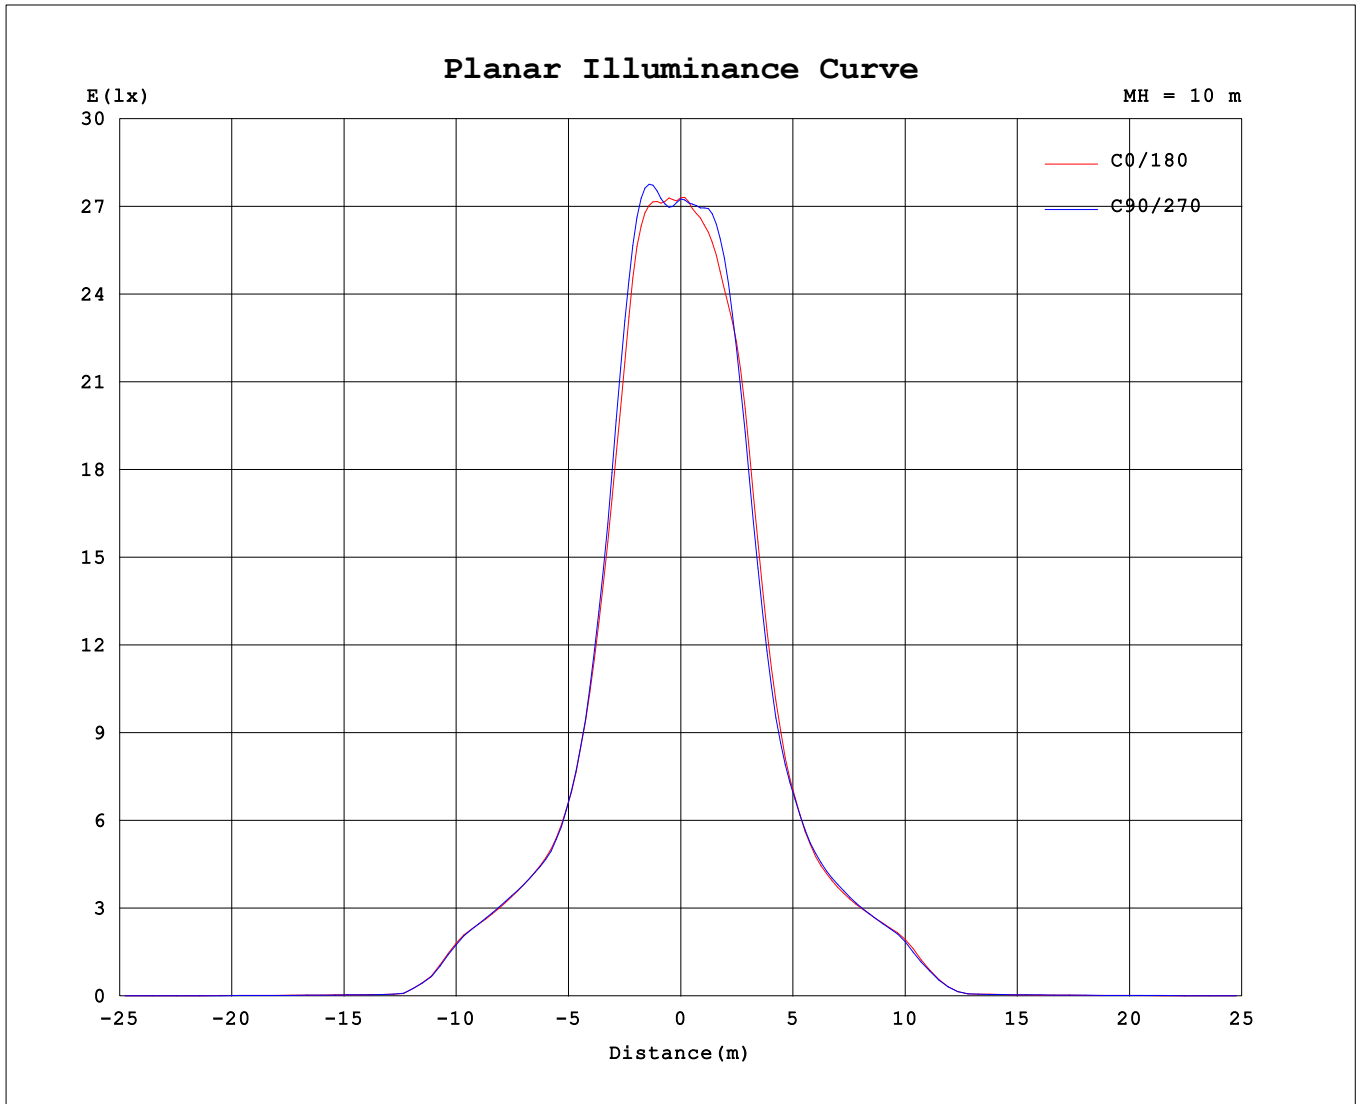

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators:  
 Test Date: 2024-01-26

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 9.780m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.55V I:0.1083A P:25.142W PF:0.9654 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2246.54x1 lm		
Name: LED-SN25W-CC	Type: 25W	Weight:
SPEC.: 5000K	DIM.:	Instrument No.:
MFR.: EVERFINE	SUR.: 0.0535	shielding angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315										
0	2727	2727	2727	2727	2727	2727	2727	2727										
5	2739	2658	2759	2774	2688	2620	2727	2836										
10	2753	2567	2857	2893	2591	2491	2713	2862										
15	2229	2282	2385	2520	2372	2263	2306	2258										
20	1538	1603	1587	1646	1682	1617	1587	1478										
25	1029	1061	1038	1062	1095	1084	1065	1029										
30	775	780	765	770	800	801	809	789										
35	692	701	695	679	678	693	696	682										
40	626	630	635	637	625	623	629	610										
45	511	533	498	517	548	557	529	477										
50	102	64.4	101	140	120	107	120	119										
55	28.0	26.4	25.9	31.1	31.6	29.2	31.4	30.9										
60	28.1	27.9	25.0	26.2	26.5	29.0	30.4	28.8										
65	28.1	26.8	25.5	26.1	28.6	28.8	30.1	28.9										
70	27.7	26.0	25.5	26.8	28.5	28.9	29.6	28.7										
75	17.9	21.1	16.9	21.3	18.4	22.3	23.4	22.7										
80	11.1	11.2	9.52	10.8	10.2	13.7	13.5	14.0										
85	6.92	6.51	4.04	6.62	5.95	9.31	7.96	9.15										
90	0.06	0.08	0.06	0.06	0.09	0.22	0.15	0.20										

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:  
 Test Date:2024-01-26

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.780m [K=1.0000]  
 Remarks: