




POWER-LITE®

Certainty at The Speed of Light

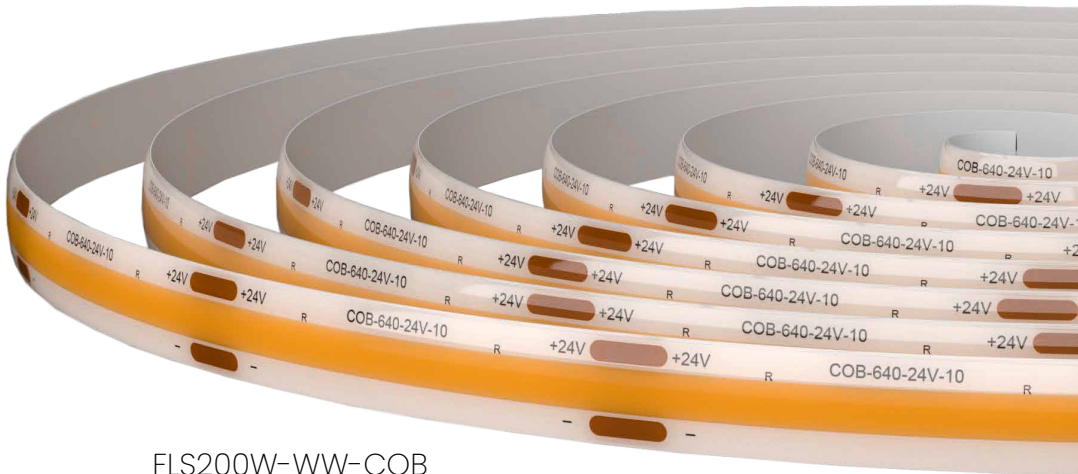

FLS200W-WW-COB

LED COB FLEXIBLE

STRIP LIGHT

FLS200W – WW- COB

The POWER-LITE® LED Strip Light not only provides a lifelong lighting solution, saving in energy and maintenance costs, but provides a very even light distribution.



E2362



APPLICATIONS

Residential
Retail
Commercial



☎ 1800 909 306

🌐 nedlandsgroup.com.au

✉ sales@nedlandsgroup.com.au




POWER-LITE®

Certainty at The Speed of Light

DIMENSIONS

FLS200W 10m Roll



SCDM

<3 Macadam steps

Efficacy

Up to 192lm/W

CRI

90

LED Driver

Supplied Separately

Carton Qty

1

PRODUCT	SPECIFICATIONS	CODE
200W LED FLEXIBLE STRIP LIGHT	<ul style="list-style-type: none"> 20W/m 640 LEDs/m Power Factor >0.9 LIFE SPAN 40,000 hrs LM80 Working Temp -20°C to +60°C LED Chip 2835 	<ul style="list-style-type: none"> 3000K 1920lm/m FLS200W-WW

ACCESSORIES	OPTIONS	CODE
LED DRIVERS		
	<ul style="list-style-type: none"> 24W Non-dimmable DC24V Male Connector 3 year warranty 	<ul style="list-style-type: none"> 70 x 70 x 40mm IP20 FLS24W-D
	<ul style="list-style-type: none"> 60W Non-dimmable DC24V 5 year warranty 	<ul style="list-style-type: none"> 180 x 45 x 32mm IP67 FLS48W-D
	<ul style="list-style-type: none"> 100W 0-10V Dimmable DC24V 5 year warranty 	<ul style="list-style-type: none"> 250 x 42 x 30mm IP67 FLS-D-100W
	<ul style="list-style-type: none"> 200W 0-10V Dimmable DC24V 5 year warranty 	<ul style="list-style-type: none"> 240 x 68 x 42mm IP67 FLS-D-200W
	<ul style="list-style-type: none"> 250W 0-10V Dimmable DC24V 5 year warranty 	<ul style="list-style-type: none"> 245 x 65 x 40mm IP67 FLS-D-250W

IP20

DC24V

120° Beam Angle



POWER-LITE®

Certainty at The Speed of Light

ACCESSORIES

OPTIONS

CODE

ALUMINIUM EXTRUSION




4M
Mount Type
Surface or
Suspended

Black
White

8 & 10mm
Strip width
IP40

AL-50/70-B
AL-50/70-W



2.5M
Mount Type
Recessed

Anodised
Finish

8 & 10mm
Strip width
IP40

PL-A020



2.5M
Mount Type
Recessed

Anodised
Finish

8 & 10mm
Strip width
IP40

PL-AL001



2.5M
Mount Type
Recessed or
Surface

Anodised
Finish

8 & 10mm
Strip width
IP40

PL-AL002



2.5M
Mount Type
Corner installation

Anodised
Finish

8 & 10mm
Strip width
IP40

PL-AL006



2.5M
Mount Type
Surface

Anodised
Finish

8 & 10mm
Strip width
IP40

PL-A043



2.5M
Mount Type
Recessed or
Surface

Silver

10mm
Strip width
IP67

PL-AL071F