


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.3V I:0.1900A P:44.00W PF:0.9610 Lamp Flux:4179.57x1 lm		
NAME: LL42W-CC-W	TYPE:42W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:0.0645	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 94.99 lm/W			
MODEL	LL42W-CC-W	I _{max} (cd)	1557	S/MH(C0/180)	1.19
NOMINAL POWER(W)	42	LOR(%)	100.0	S/MH(C90/270)	1.23
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	4179.6	η UP, DN(C0-180)	0.7, 49.6
NOMINAL FLUX(lm)	4179.57	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.6, 49.2
LAMPS INSIDE	1	η up(%)	1.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	240.3	η down(%)	98.7	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

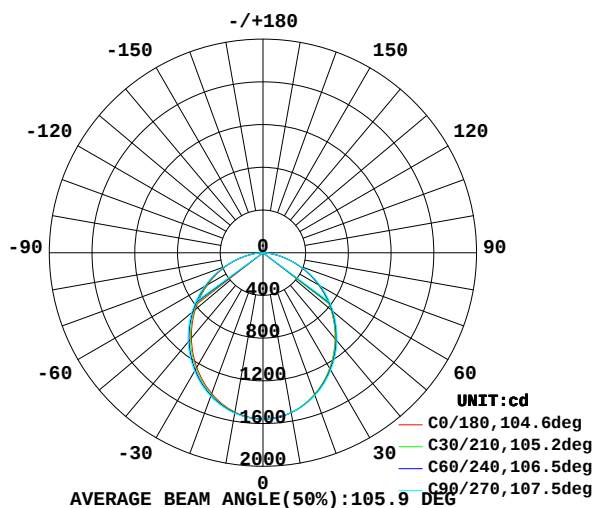

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

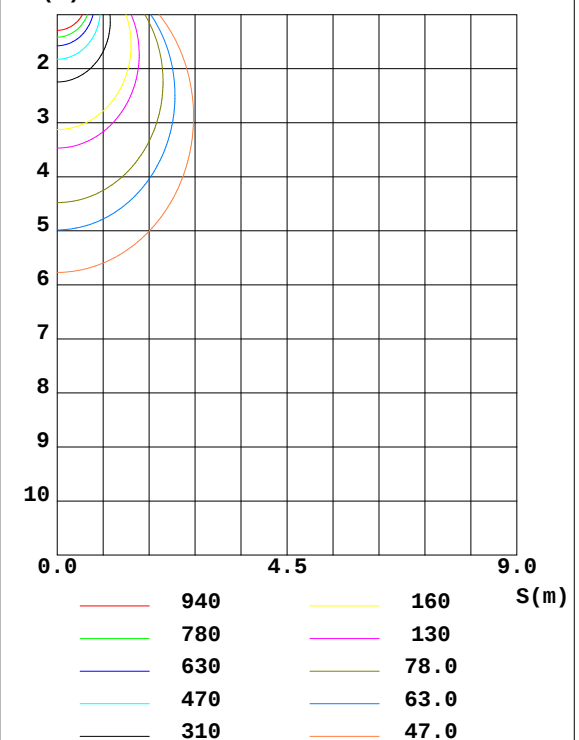


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:10.237m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1515	1521	1526	1522	1520	1520	1521	1520	0- 10	146.9	146.9	3.51, 3.51
20	1404	1418	1431	1421	1413	1415	1421	1416	10- 20	416.3	563.2	13.5, 13.5
30	1240	1261	1281	1266	1251	1257	1269	1258	20- 30	619.2	1182	28.3, 28.3
40	1043	1067	1091	1072	1053	1061	1077	1063	30- 40	729.7	1912	45.7, 45.7
50	827.4	849.9	872.5	851.5	833.8	840.6	857.8	844.5	40- 50	739.4	2651	63.4, 63.4
60	600.9	618.8	634.4	615.3	601.5	605.7	620.6	612.7	50- 60	654.0	3305	79.1, 79.1
70	367.9	378.5	383.1	370.0	361.1	363.1	372.6	373.1	60- 70	487.4	3793	90.7, 90.7
80	147.1	149.5	141.8	138.3	137.7	135.3	135.1	146.0	70- 80	267.3	4060	97.1, 97.1
90	13.58	9.821	3.358	6.465	9.275	6.685	3.190	9.289	80- 90	65.50	4126	98.7, 98.7
100	3.757	3.941	4.291	3.980	3.200	3.896	4.268	3.854	90-100	4.060	4130	98.8, 98.8
110	5.667	5.857	6.548	5.926	4.969	5.750	6.799	5.608	100-110	5.128	4135	98.9, 98.9
120	7.794	7.986	8.769	8.054	7.042	7.881	9.140	7.797	110-120	6.859	4142	99.1, 99.1
130	10.06	10.17	10.96	10.26	8.999	9.983	11.10	9.750	120-130	8.155	4150	99.3, 99.3
140	12.31	12.20	12.88	12.36	11.04	11.98	12.78	11.66	130-140	8.595	4158	99.5, 99.5
150	14.41	14.09	14.47	14.19	12.98	13.70	14.20	13.32	140-150	8.149	4167	99.7, 99.7
160	16.32	15.73	15.82	15.78	14.91	15.14	15.34	14.75	150-160	6.777	4173	99.9, 99.9
170	17.88	16.99	16.80	17.02	16.63	16.30	16.16	16.00	160-170	4.540	4178	100, 100
180	18.48	17.62	17.31	17.63	18.54	17.61	17.29	17.63	170-180	1.634	4180	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

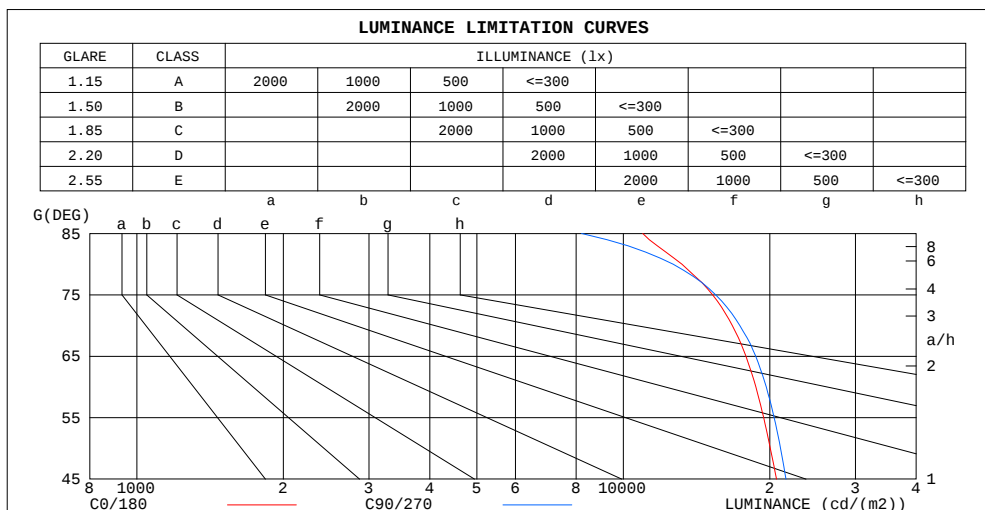

LUMINANCE cd/(m²)		
G(°)	C0/180	C90/270
85	10959	8208
80	13198	12660
75	15263	15486
70	16757	17367
65	17866	18709
60	18722	19668
55	19433	20420
50	20054	21044
45	20646	21593


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.276
Humidity: 65.0%
Test Distance: 10.237m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.3V I:0.1900A P:44.00W PF:0.9610 Lamp Flux:4179.57x1 lm		
NAME: LL42W-CC-W	TYPE:42W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:0.0645	PROTECTION ANGLE:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.04	.90	.96	1.02	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.84	.79	.89	.83	.77	.85	.80	.75	.82	.77	.74	.78	.75	.72	.70
3.0	.80	.72	.65	.78	.71	.65	.75	.69	.63	.72	.67	.62	.69	.65	.61	.59
4.0	.71	.62	.56	.70	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.53	.50
5.0	.63	.55	.48	.62	.54	.48	.60	.53	.47	.58	.51	.46	.56	.50	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.52	.46	.41	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.37	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.47	.39	.33	.45	.38	.33	.44	.37	.32	.43	.37	.32	.30
9.0	.44	.35	.30	.43	.35	.30	.42	.35	.30	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.25

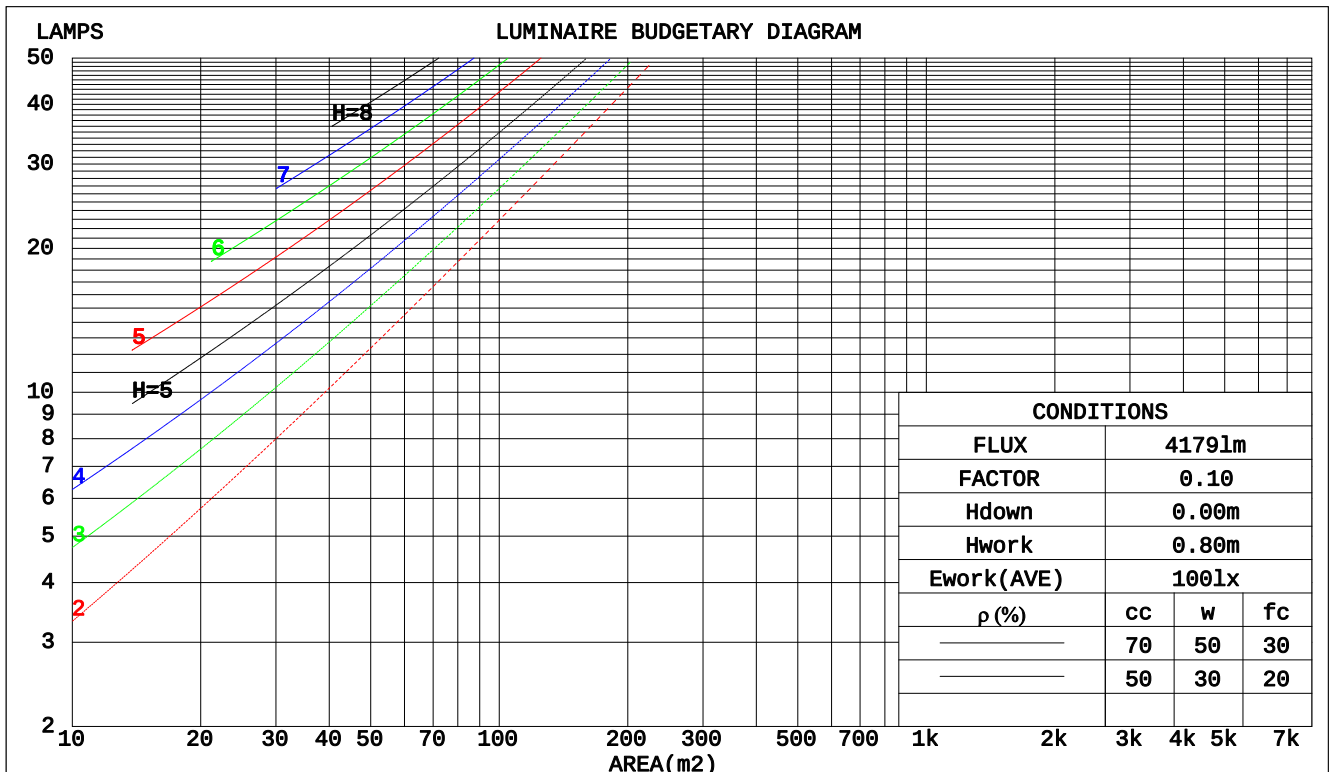

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:10.237m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.3V I:0.1900A P:44.00W PF:0.9610 Lamp Flux:4179.57x1 lm									
NAME: LL42W-CC-W					TYPE:42W			WEIGHT:	
DIM.:					SPEC.:3000K			SERIAL No.:1	
MFR.:					SUR.:0.0645			PROTECTION ANGLE:	

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.301	.171	.054	.294	.167	.053	.280	.160	.051	.267	.154	.049	.255	.148	.048		
2.0	.285	.156	.048	.278	.153	.047	.266	.148	.046	.254	.143	.045	.244	.138	.044		
3.0	.264	.141	.042	.259	.138	.042	.248	.134	.041	.238	.130	.040	.228	.126	.039		
4.0	.245	.127	.037	.239	.125	.037	.230	.122	.036	.221	.119	.036	.212	.115	.035		
5.0	.226	.115	.033	.222	.114	.033	.213	.111	.033	.205	.108	.032	.198	.106	.032		
6.0	.210	.105	.030	.206	.104	.030	.199	.102	.030	.191	.099	.029	.185	.097	.029		
7.0	.196	.097	.027	.192	.096	.027	.185	.094	.027	.179	.092	.027	.173	.090	.026		
8.0	.183	.090	.025	.180	.089	.025	.174	.087	.025	.168	.085	.025	.162	.083	.024		
9.0	.172	.083	.023	.169	.082	.023	.163	.081	.023	.158	.079	.023	.153	.078	.022		
10.0	.162	.078	.022	.159	.077	.021	.154	.075	.021	.149	.074	.021	.145	.073	.021		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.200	.200	.200	.171	.171	.171	.117	.117	.117	.067	.067	.067	.021	.021	.021	
1.0	.190	.166	.145	.162	.143	.125	.111	.098	.086	.064	.057	.050	.020	.018	.016	
2.0	.181	.142	.109	.155	.122	.094	.106	.085	.066	.061	.049	.038	.020	.016	.013	
3.0	.173	.124	.085	.149	.107	.074	.102	.074	.052	.059	.043	.031	.019	.014	.010	
4.0	.166	.111	.069	.142	.096	.060	.098	.067	.042	.057	.039	.025	.018	.013	.008	
5.0	.158	.101	.058	.136	.087	.050	.094	.061	.036	.054	.036	.021	.017	.012	.007	
6.0	.151	.092	.050	.130	.080	.043	.090	.056	.031	.052	.033	.018	.017	.011	.006	
7.0	.145	.085	.044	.124	.074	.038	.086	.052	.027	.050	.031	.016	.016	.010	.005	
8.0	.138	.079	.039	.119	.069	.034	.082	.048	.024	.048	.029	.014	.015	.009	.005	
9.0	.132	.075	.036	.114	.065	.031	.079	.045	.022	.046	.027	.013	.015	.009	.004	
10.0	.126	.070	.033	.109	.061	.029	.076	.043	.020	.044	.025	.012	.014	.008	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.276
Humidity:65.0%
Test Distance:10.237m [K=1.0000]
Remarks:

Uncorrected UGR Table

Test:U:240.3V I:0.1900A P:44.00W PF:0.9610 Lamp Flux:4179.57x1 lm											
NAME: LL42W-CC-W					TYPE:42W			WEIGHT:			
DIM.:					SPEC.:3000K			SERIAL No.:1			
MFR.:					SUR.:0.0645			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise				Viewed endwise					
x = 2H y = 2H	2H	23.1	24.5	23.3	24.8	25.0	23.3	24.7	23.5	25.0	25.2
	3H	24.5	25.9	24.8	26.1	26.4	24.7	26.1	25.0	26.3	26.6
	4H	25.1	26.4	25.4	26.6	26.9	25.3	26.6	25.6	26.8	27.1
	6H	25.4	26.7	25.8	27.0	27.3	25.6	26.8	25.9	27.1	27.4
	8H	25.5	26.7	25.9	27.0	27.3	25.7	26.8	26.0	27.2	27.5
	12H	25.6	26.7	26.0	27.0	27.4	25.7	26.8	26.1	27.1	27.5
4H	2H	23.7	25.0	24.0	25.2	25.5	23.8	25.1	24.2	25.4	25.7
	3H	25.3	26.4	25.7	26.7	27.1	25.5	26.6	25.8	26.9	27.2
	4H	26.0	27.0	26.4	27.3	27.7	26.1	27.2	26.5	27.5	27.9
	6H	26.5	27.4	26.9	27.8	28.1	26.6	27.5	27.0	27.9	28.3
	8H	26.6	27.5	27.0	27.9	28.3	26.7	27.6	27.1	27.9	28.4
	12H	26.7	27.5	27.2	27.9	28.3	26.7	27.5	27.2	27.9	28.4
8H	4H	26.2	27.1	26.7	27.5	27.9	26.4	27.2	26.8	27.6	28.0
	6H	26.8	27.6	27.3	28.0	28.4	26.9	27.7	27.4	28.1	28.5
	8H	27.1	27.7	27.6	28.2	28.6	27.1	27.8	27.6	28.2	28.7
	12H	27.2	27.8	27.7	28.2	28.8	27.2	27.8	27.7	28.2	28.7
12H	4H	26.2	27.0	26.7	27.4	27.8	26.4	27.1	26.8	27.6	28.0
	6H	26.9	27.5	27.4	28.0	28.4	27.0	27.6	27.5	28.1	28.5
	8H	27.2	27.7	27.7	28.2	28.7	27.2	27.7	27.7	28.2	28.7
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 4180 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.0)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.276
Humidity:65.0%
Test Distance:10.237m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.3V I:0.1900A P:44.00W PF:0.9610 Lamp Flux:4179.57x1 lm		
NAME: LL42W-CC-W	TYPE:42W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:0.0645	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	47	40	57	46	40	56	46	40	33
0.80	68	57	49	67	56	49	65	55	49	42
1.00	77	66	58	75	65	58	73	66	57	50
1.25	84	73	66	82	72	66	79	71	65	58
1.50	88	79	72	87	78	71	84	76	70	63
2.00	95	87	81	93	86	80	90	83	78	70
2.50	99	91	86	97	90	85	93	87	83	74
3.00	102	96	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	99	95	92	83
5.00	109	104	100	106	102	98	101	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.276
Humidity:65.0%
Test Distance:10.237m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.3V I:0.1900A P:44.00W PF:0.9610 Lamp Flux:4179.57x1 lm		
NAME: LL42W-CC-W	TYPE:42W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:0.0645	PROTECTION ANGLE:

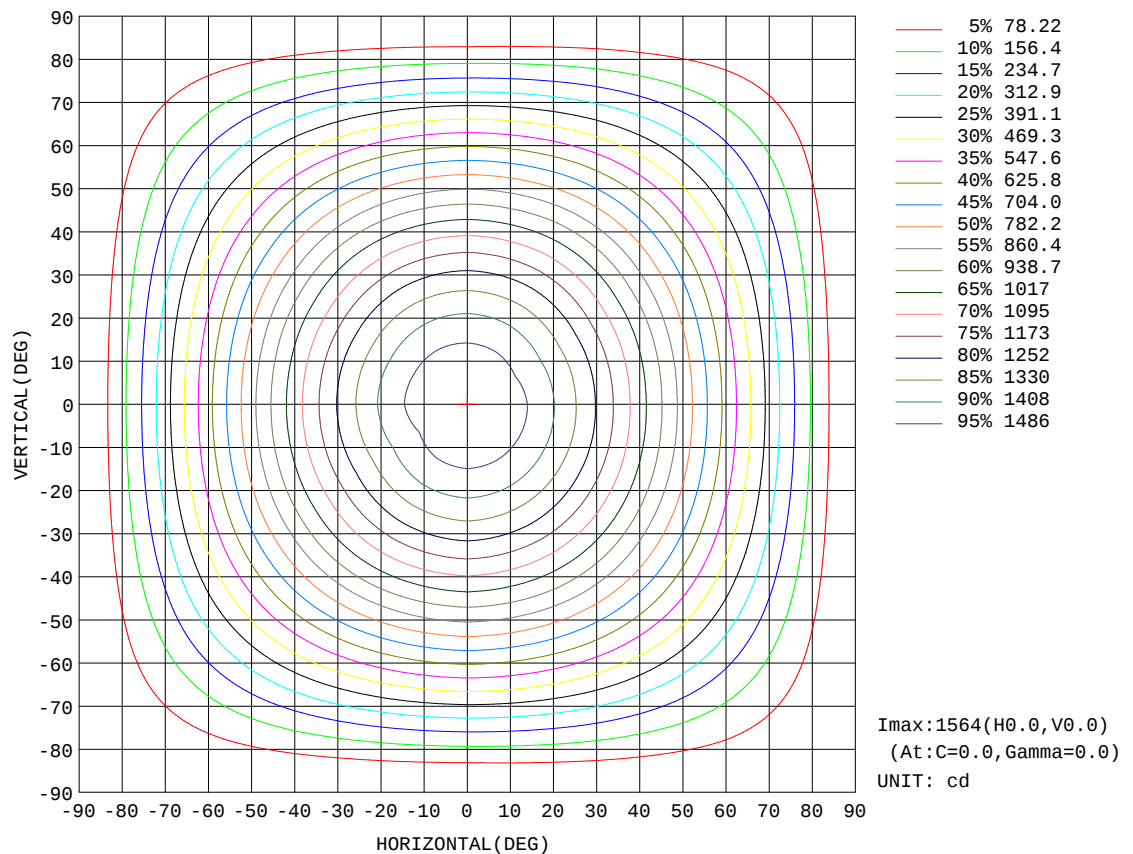


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.276
Humidity:65.0%
Test Distance:10.237m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.3V I:0.1900A P:44.00W PF:0.9610 Lamp Flux:4179.57x1 lm		
NAME: LL42W-CC-W	TYPE:42W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:0.0645	PROTECTION ANGLE:

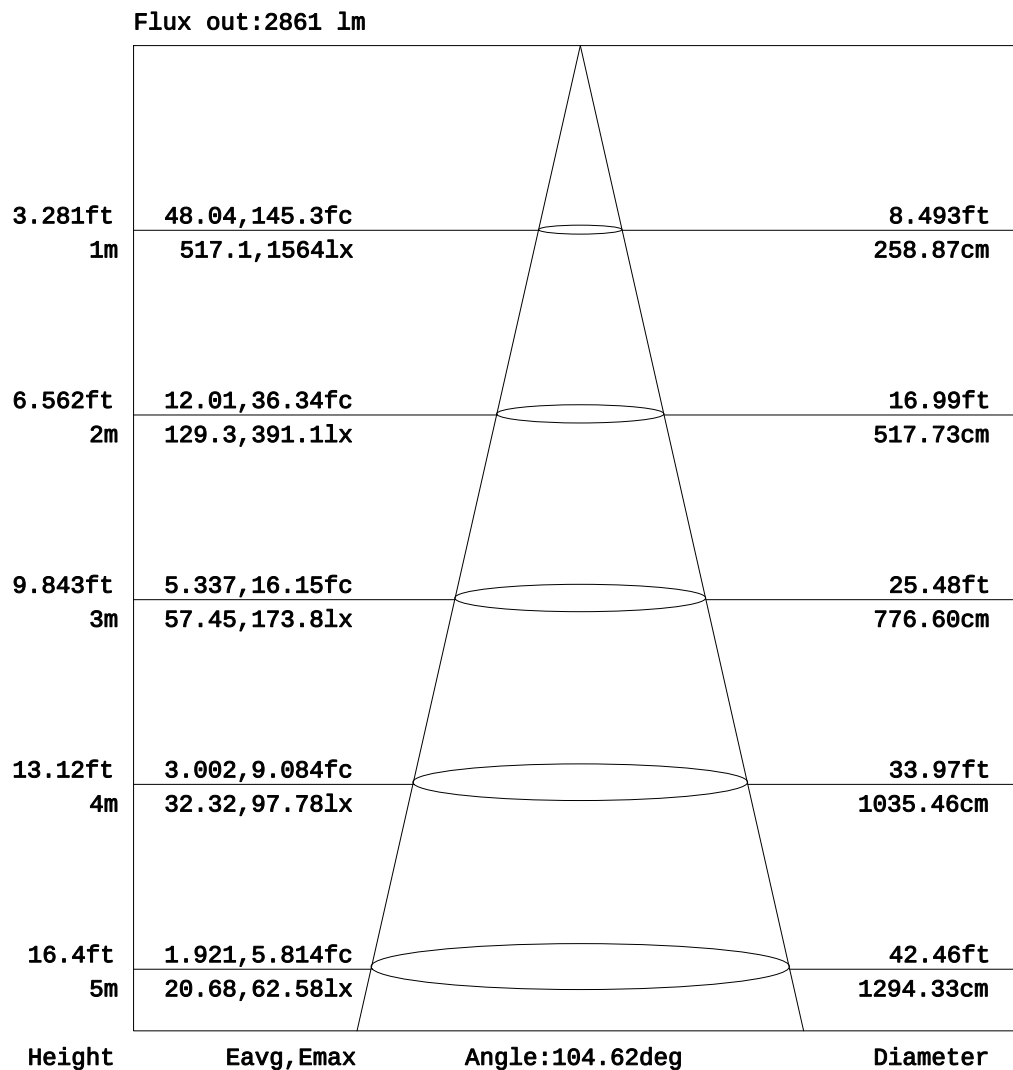


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.276
Humidity:65.0%
Test Distance:10.237m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:240.3V I:0.1900A P:44.00W PF:0.9610 Lamp Flux:4179.57x1 lm		
NAME: LL42W-CC-W	TYPE:42W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:0.0645	PROTECTION ANGLE:

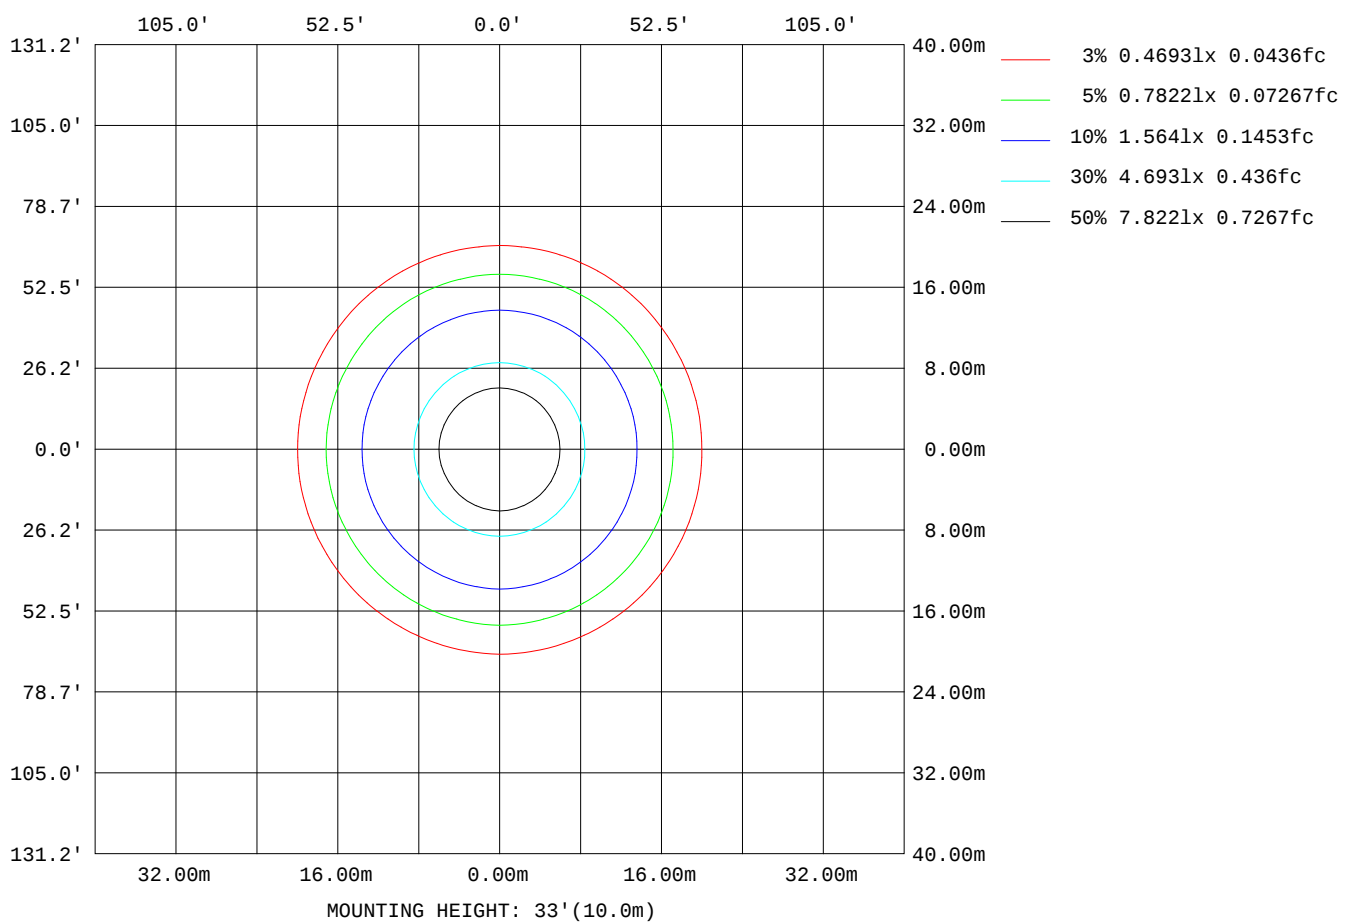

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.276
Humidity:65.0%
Test Distance:10.237m [K=1.0000]
Remarks:

Planar Illuminance Curve

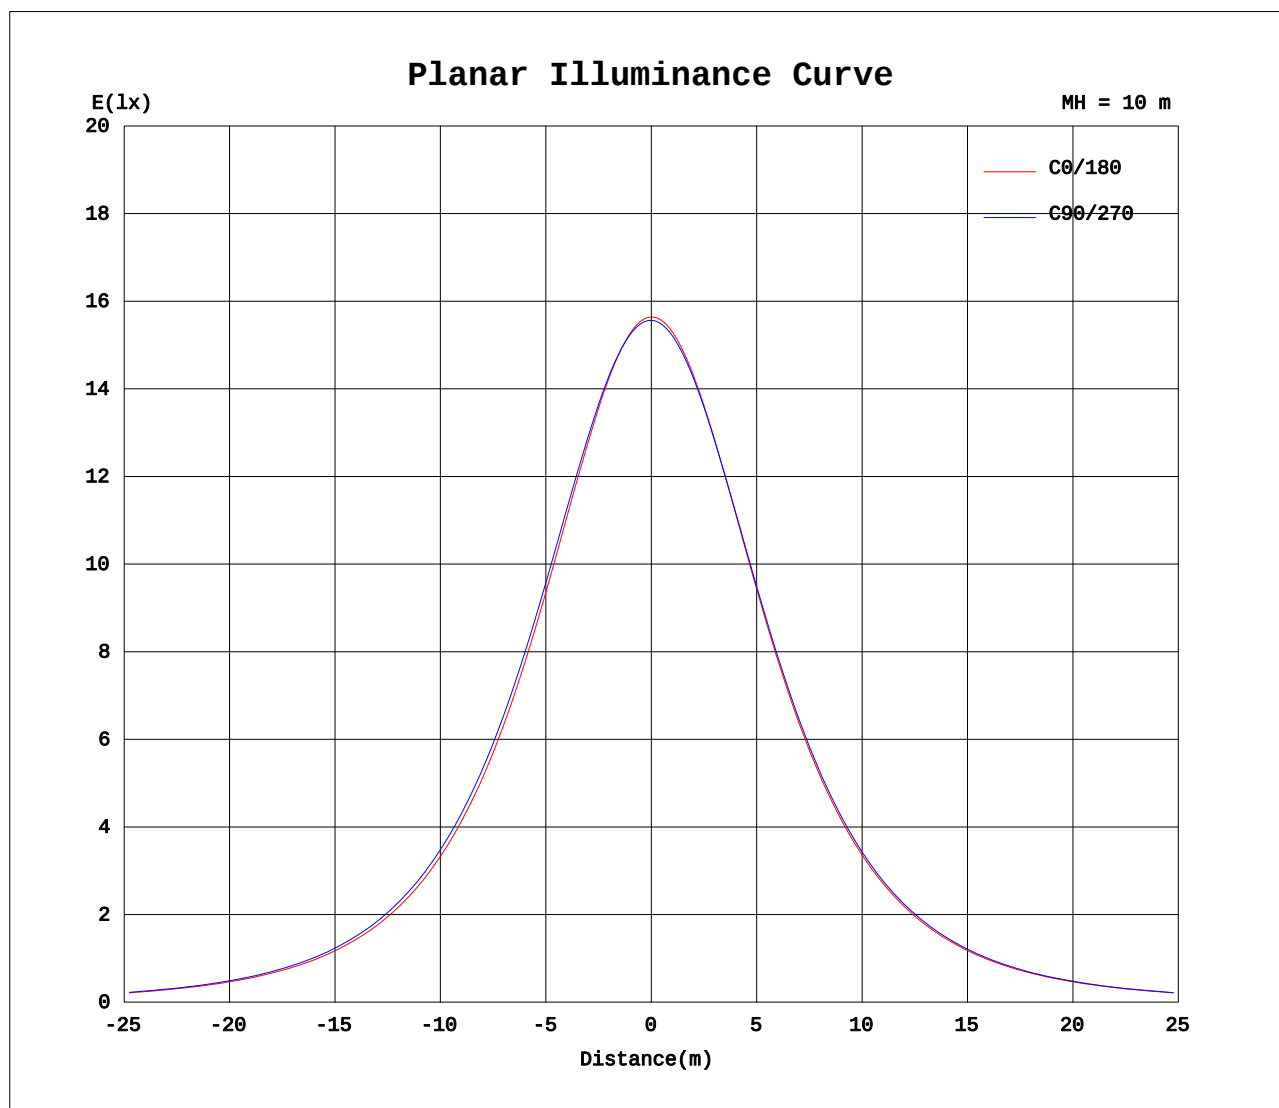

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.276
Humidity: 65.0%
Test Distance: 10.237m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.3V I:0.1900A P:44.00W PF:0.9610 Lamp Flux:4179.57x1 lm																	
NAME: LL42W-CC-W									TYPE:42W						WEIGHT:		
DIM.:									SPEC.:3000K						SERIAL No.:1		
MFR.:									SUR.:0.0645						PROTECTION ANGLE:		

Table--1

UNIT: cd

C(DEC) γ (DEC)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1557	1557	1557	1557	1557	1557	1557	1557	1557	1557	1557	1557						
5	1546	1547	1549	1550	1549	1547	1548	1547	1547	1547	1547	1548						
10	1515	1519	1523	1526	1524	1520	1520	1519	1521	1521	1520	1520						
15	1467	1474	1481	1486	1483	1476	1474	1473	1477	1478	1477	1475						
20	1404	1413	1423	1431	1426	1416	1413	1412	1419	1421	1418	1414						
25	1327	1338	1352	1362	1355	1344	1337	1337	1347	1351	1346	1339						
30	1240	1253	1270	1281	1272	1260	1251	1251	1263	1269	1263	1253						
35	1145	1158	1177	1191	1179	1166	1155	1155	1169	1177	1170	1158						
40	1043	1057	1077	1091	1078	1065	1053	1053	1068	1077	1069	1056						
45	937	951	971	985	971	958	945	945	960	970	963	949						
50	827	841	859	873	858	845	834	833	848	858	851	838						
55	715	728	744	755	741	729	719	718	732	741	736	724						
60	601	612	625	634	620	611	601	600	612	621	617	608						
65	485	494	504	510	497	489	482	480	490	497	496	490						
70	368	375	382	383	373	367	361	360	366	373	374	372						
75	254	259	262	259	252	248	245	243	247	250	255	256						
80	147	151	148	142	138	138	138	135	136	135	144	148						
85	61.3	61.8	55.1	46.1	47.4	51.7	53.7	50.5	46.9	43.2	53.2	59.9						
90	13.6	12.6	7.09	3.36	4.96	7.98	9.27	7.92	5.45	3.19	6.90	11.7						
95	2.97	3.04	3.24	3.28	3.24	2.99	2.51	3.01	3.46	3.17	3.41	2.95						
100	3.76	3.80	4.09	4.29	4.14	3.82	3.20	3.60	4.20	4.27	4.11	3.60						
105	4.69	4.69	4.99	5.39	5.04	4.78	4.03	4.46	5.11	5.58	4.96	4.40						
110	5.67	5.69	6.02	6.55	6.06	5.79	4.97	5.35	6.15	6.80	6.00	5.22						
115	6.70	6.75	7.05	7.64	7.15	6.78	5.99	6.28	7.30	7.99	7.15	6.19						
120	7.79	7.83	8.15	8.77	8.27	7.83	7.04	7.28	8.48	9.14	8.26	7.33						
125	8.91	8.91	9.31	9.89	9.42	8.87	8.09	8.39	9.64	10.3	9.39	8.37						
130	10.1	10.00	10.4	11.0	10.5	9.99	9.00	9.38	10.6	11.1	10.1	9.35						
135	11.2	11.0	11.4	12.0	11.6	11.1	10.0	10.4	11.5	11.9	11.1	10.4						
140	12.3	12.1	12.3	12.9	12.6	12.1	11.0	11.5	12.5	12.8	12.0	11.3						
145	13.4	13.1	13.2	13.7	13.5	13.1	12.0	12.4	13.3	13.5	12.8	12.2						
150	14.4	14.1	14.1	14.5	14.3	14.1	13.0	13.3	14.1	14.2	13.5	13.1						
155	15.4	15.1	14.9	15.2	15.0	15.1	14.0	14.2	14.7	14.8	14.2	13.9						
160	16.3	15.9	15.6	15.8	15.7	15.8	14.9	15.0	15.3	15.3	14.9	14.6						
165	17.2	16.6	16.2	16.4	16.3	16.6	15.8	15.7	15.8	15.8	15.4	15.3						
170	17.9	17.2	16.8	16.8	16.8	17.2	16.6	16.3	16.3	16.2	15.9	16.1						
175	18.3	17.6	17.2	17.1	17.2	17.7	18.2	17.5	17.2	17.2	17.2	17.6						
180	18.5	17.9	17.4	17.3	17.4	17.9	18.5	17.8	17.4	17.3	17.4	17.9						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.276
Humidity:65.0%
Test Distance:10.237m [K=1.0000]
Remarks: