
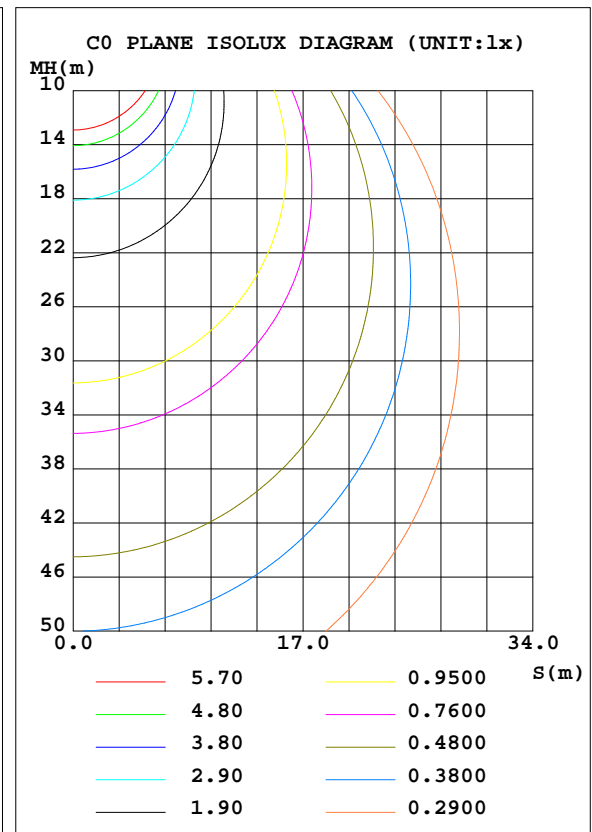


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.115V I:1.0766A P:25.951W PF:1.0000 Freq:50.00Hz Lamp Flux:3176.21x1 lm		
NAME: WP18W-CC-MS-24V	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20230830A22
MFR.:	SUR.:0.1*0.6	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 122.39 lm/W			
MODEL		I _{max} (cd)	947.9	S/MH(C0/180)	1.30
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.21
RATED VOLTAGE(V)		TOTAL FLUX(lm)	3176.2	η UP, DN(C0-180)	3.2,46.8
NOMINAL FLUX(lm)	3176.21	CIE CLASS	DIRECT	η UP, DN(C180-360)	3.2,46.7
LAMPS INSIDE	1	η up(%)	6.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)		η down(%)	93.6	CIBSE SHR MAX	1.35

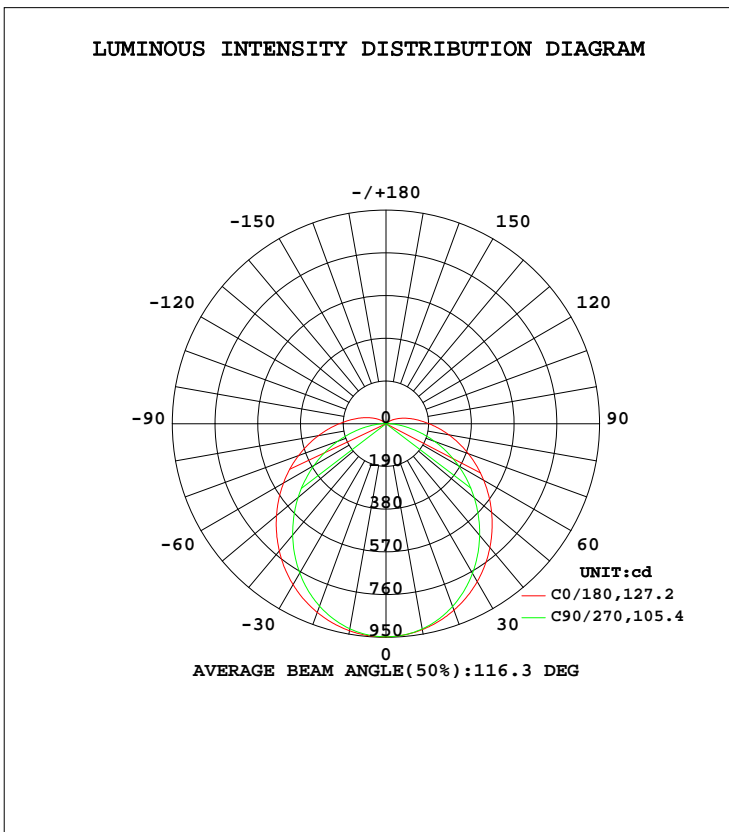

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:NEIKO
 Test Date:30 August 2023

γ Range: 0 - 130DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:9.770m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	929.8	927.6	926.7	931.9	935.0	930.9	926.0	926.9	0- 10	89.58	89.58	2.82,2.82
20	882.5	872.5	865.0	881.0	893.1	879.5	863.7	871.2	10- 20	255.8	345.4	10.9,10.9
30	811.4	788.1	768.9	800.0	826.5	798.0	767.1	786.0	20- 30	386.1	731.5	23,23
40	718.9	681.8	648.0	696.4	738.3	694.3	645.8	678.9	30- 40	464.8	1196	37.7,37.7
50	613.4	561.6	512.8	577.9	635.7	575.9	510.5	558.4	40- 50	485.5	1682	53,53
60	501.6	437.7	371.8	454.2	526.2	452.7	368.9	433.8	50- 60	452.7	2135	67.2,67.2
70	389.7	319.9	231.0	335.2	413.7	333.5	228.6	316.0	60- 70	378.2	2513	79.1,79.1
80	283.8	215.0	101.2	228.3	304.6	227.0	99.01	211.7	70- 80	279.2	2792	87.9,87.9
90	192.2	132.2	23.56	142.2	208.5	141.4	22.45	129.4	80- 90	179.8	2972	93.6,93.6
100	123.1	74.40	14.77	81.00	134.3	80.59	14.20	72.26	90-100	106.5	3078	96.9,96.9
110	72.55	36.50	9.613	40.45	79.87	40.16	9.248	34.99	100-110	58.48	3137	98.8,98.8
120	36.64	13.33	6.291	15.15	40.92	14.84	6.016	12.26	110-120	28.17	3165	99.6,99.6
130	12.87	6.106	4.425	6.342	14.67	6.241	4.358	5.755	120-130	11.09	3176	100,100
140	0	0	0	0	0	0	0	0	130-140	0.1571	3176	100,100
150	0	0	0	0	0	0	0	0	140-150	0	3176	100,100
160	0	0	0	0	0	0	0	0	150-160	0	3176	100,100
170	0	0	0	0	0	0	0	0	160-170	0	3176	100,100
180	0	0	0	0	0	0	0	0	170-180	0	3176	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1440 lm

%lum = 45.3%
 %lamp = 45.3%

Conical surface Flux(120deg): 2134.6 lm


%lum = 67.2%
 %lamp = 67.2%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:NEIKO
 Test Date:30 August 2023

γ Range: 0 - 130DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:9.770m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.115V I:1.0766A P:25.951W PF:1.0000 Freq:50.00Hz Lamp Flux:3176.21x1 lm		
NAME: WP18W-CC-MS-24V	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20230830A22
MFR.:	SUR.:0.1*0.6	Shielding Angle:

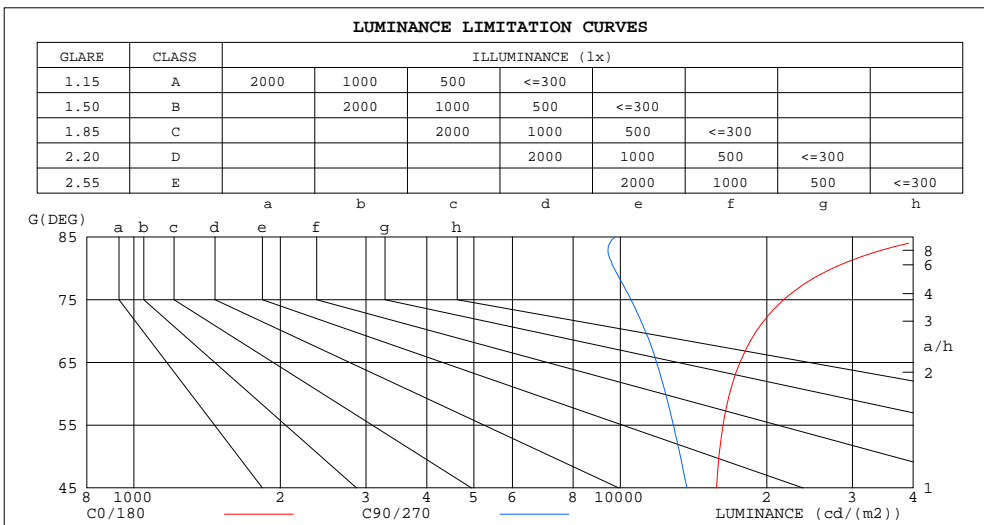

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	45156	9761
80	27324	9712
75	21679	10510
70	19050	11251
65	17622	11871
60	16770	12386
55	16258	12856
50	15954	13288
45	15770	13700


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:NEIKO
 Test Date:30 August 2023

γ Range: 0 - 130DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:9.770m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.115V I:1.0766A P:25.951W PF:1.0000 Freq:50.00Hz Lamp Flux:3176.21x1 lm		
NAME: WP18W-CC-MS-24V	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20230830A22
MFR.:	SUR.:0.1*0.6	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.18	1.18	1.18	1.14	1.14	1.14	1.08	1.08	1.08	1.02	1.02	1.02	.96	.96	.96	.94
1.0	.00	.95	.90	.97	.92	.88	.91	.88	.84	.86	.83	.80	.82	.79	.77	.74
2.0	.86	.79	.72	.84	.77	.71	.79	.73	.68	.75	.70	.66	.71	.67	.63	.61
3.0	.75	.66	.59	.73	.65	.58	.69	.62	.57	.65	.60	.55	.62	.57	.53	.50
4.0	.66	.57	.50	.64	.56	.49	.61	.54	.48	.58	.52	.46	.55	.50	.45	.43
5.0	.59	.50	.43	.58	.49	.42	.55	.47	.41	.52	.45	.40	.49	.44	.39	.37
6.0	.53	.44	.37	.52	.43	.37	.49	.42	.36	.47	.40	.35	.45	.39	.34	.32
7.0	.48	.39	.33	.47	.38	.32	.45	.37	.32	.43	.36	.31	.41	.35	.30	.28
8.0	.44	.35	.29	.43	.35	.29	.41	.34	.28	.39	.33	.28	.38	.32	.27	.25
9.0	.40	.32	.26	.39	.31	.26	.38	.30	.25	.36	.30	.25	.35	.29	.24	.23
10.0	.37	.29	.24	.36	.29	.23	.35	.28	.23	.33	.27	.23	.32	.26	.22	.20

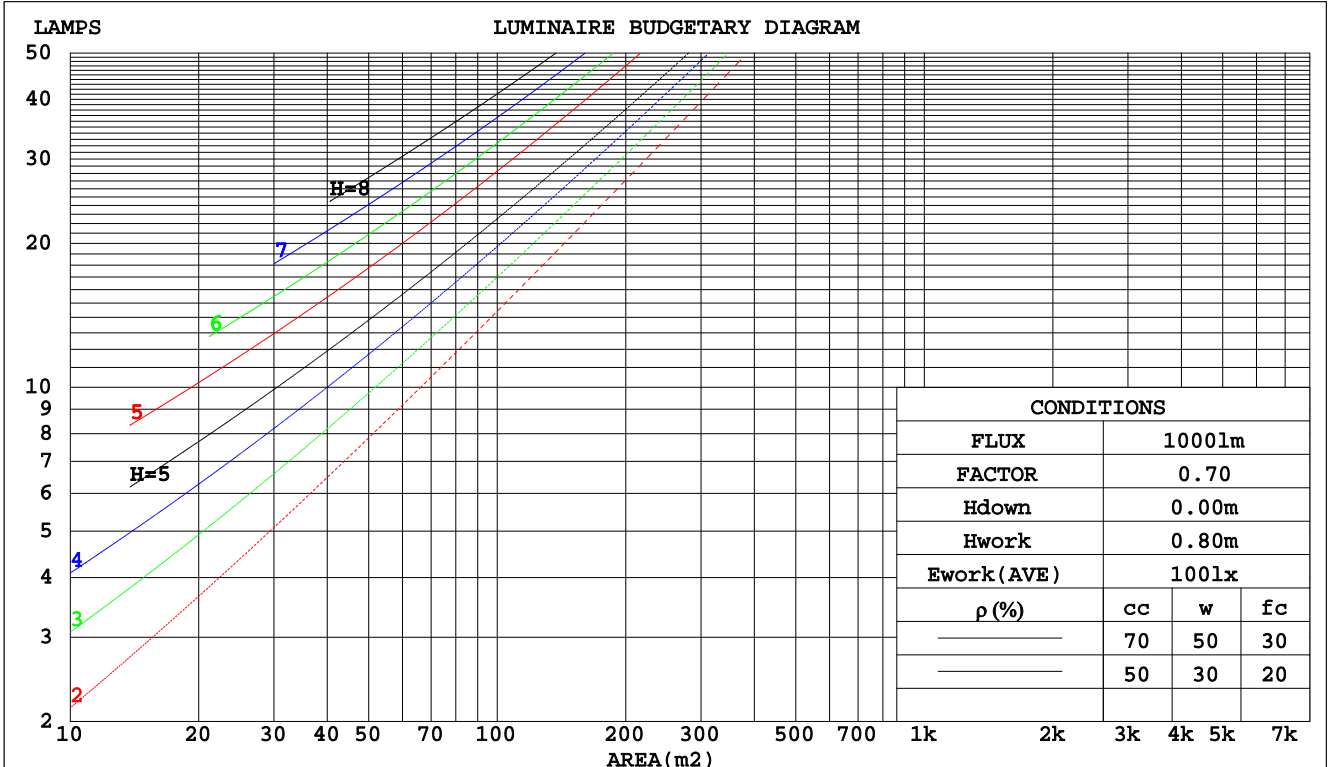

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:NEIKO
 Test Date:30 August 2023

γ Range: 0 - 130DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:9.770m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.115V I:1.0766A P:25.951W PF:1.0000 Freq:50.00Hz Lamp Flux:3176.21x1 lm		
NAME: WP18W-CC-MS-24V	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20230830A22
MFR.:	SUR.:0.1*0.6	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.359	.204	.065	.350	.200	.063	.333	.191	.061	.317	.183	.059	.302	.175	.057	
2.0	.319	.175	.054	.311	.171	.053	.296	.164	.051	.281	.158	.049	.268	.152	.048	
3.0	.287	.153	.046	.280	.150	.045	.266	.144	.044	.254	.139	.043	.242	.134	.041	
4.0	.261	.136	.040	.254	.133	.039	.242	.128	.038	.231	.124	.037	.220	.120	.036	
5.0	.238	.122	.035	.233	.119	.035	.222	.115	.034	.211	.112	.033	.202	.108	.032	
6.0	.219	.110	.031	.214	.108	.031	.204	.105	.030	.195	.101	.030	.186	.098	.029	
7.0	.203	.100	.028	.198	.099	.028	.189	.096	.028	.181	.093	.027	.173	.090	.026	
8.0	.189	.092	.026	.185	.091	.026	.176	.088	.025	.169	.086	.025	.162	.083	.024	
9.0	.176	.085	.024	.173	.084	.024	.165	.082	.023	.158	.079	.023	.152	.077	.022	
10.0	.165	.079	.022	.162	.078	.022	.155	.076	.021	.149	.074	.021	.143	.072	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.240	.240	.240	.205	.205	.205	.140	.140	.140	.080	.080	.080	.026	.026	.026	
1.0	.233	.205	.180	.199	.176	.155	.136	.121	.107	.079	.070	.062	.025	.023	.020	
2.0	.226	.182	.144	.193	.156	.125	.132	.108	.087	.076	.063	.051	.025	.020	.017	
3.0	.218	.164	.122	.187	.142	.106	.128	.099	.074	.074	.058	.044	.024	.019	.014	
4.0	.210	.152	.107	.180	.131	.093	.124	.091	.065	.072	.053	.039	.023	.017	.013	
5.0	.202	.141	.096	.174	.122	.084	.120	.085	.059	.069	.050	.035	.022	.016	.012	
6.0	.195	.133	.089	.167	.115	.077	.116	.081	.055	.067	.047	.033	.022	.016	.011	
7.0	.188	.126	.083	.162	.110	.073	.112	.077	.051	.065	.045	.031	.021	.015	.010	
8.0	.181	.121	.079	.156	.105	.069	.108	.073	.049	.063	.043	.029	.020	.014	.010	
9.0	.175	.116	.076	.151	.100	.066	.104	.071	.047	.061	.042	.028	.020	.014	.009	
10.0	.169	.111	.073	.146	.097	.064	.101	.068	.045	.059	.040	.027	.019	.013	.009	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:NEIKO
 Test Date:30 August 2023

γ Range: 0 - 130DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:9.770m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.115V I:1.0766A P:25.951W PF:1.0000 Freq:50.00Hz Lamp Flux:3176.21x1 lm		
NAME: WP18W-CC-MS-24V	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20230830A22
MFR.:	SUR.:0.1*0.6	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.3	23.8	22.6	24.1	24.4	21.0	22.5	21.4	22.8	23.1
3H	24.5	25.8	24.8	26.2	26.6	22.5	23.9	22.9	24.2	24.6
4H	25.6	26.9	26.0	27.3	27.7	23.1	24.4	23.5	24.8	25.2
6H	26.8	28.1	27.3	28.5	28.9	23.6	24.8	24.0	25.2	25.6
8H	27.5	28.7	27.9	29.1	29.5	23.8	25.0	24.2	25.4	25.8
12H	28.2	29.4	28.7	29.8	30.2	23.9	25.0	24.3	25.5	25.9
4H 2H	22.8	24.1	23.2	24.5	24.9	21.9	23.2	22.3	23.5	23.9
3H	25.2	26.4	25.7	26.8	27.3	23.6	24.7	24.0	25.1	25.6
4H	26.6	27.6	27.1	28.1	28.6	24.3	25.4	24.8	25.8	26.3
6H	28.0	29.0	28.5	29.4	29.9	25.0	25.9	25.5	26.4	26.9
8H	28.8	29.7	29.3	30.2	30.7	25.2	26.1	25.8	26.6	27.1
12H	29.7	30.5	30.2	31.0	31.6	25.4	26.3	26.0	26.8	27.3
8H 4H	26.9	27.8	27.4	28.3	28.8	25.0	25.9	25.5	26.4	26.9
6H	28.6	29.4	29.2	29.9	30.5	26.0	26.7	26.5	27.2	27.8
8H	29.6	30.3	30.2	30.8	31.4	26.4	27.0	26.9	27.6	28.2
12H	30.7	31.3	31.3	31.9	32.5	26.7	27.3	27.3	27.9	28.5
12H 4H	26.9	27.7	27.4	28.2	28.8	25.2	26.0	25.7	26.5	27.1
6H	28.7	29.4	29.3	29.9	30.5	26.3	27.0	26.9	27.5	28.1
8H	29.8	30.4	30.4	30.9	31.6	26.8	27.4	27.4	28.0	28.6
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.3				


CIE Pub.117, 3176 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.0)
 Area: 0.06 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:NEIKO
 Test Date:30 August 2023

γ Range: 0 - 130DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:9.770m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.115V I:1.0766A P:25.951W PF:1.0000 Freq:50.00Hz Lamp Flux:3176.2lx1 lm		
NAME: WP18W-CC-MS-24V	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20230830A22
MFR.:	SUR.:0.1*0.6	Shielding Angle:

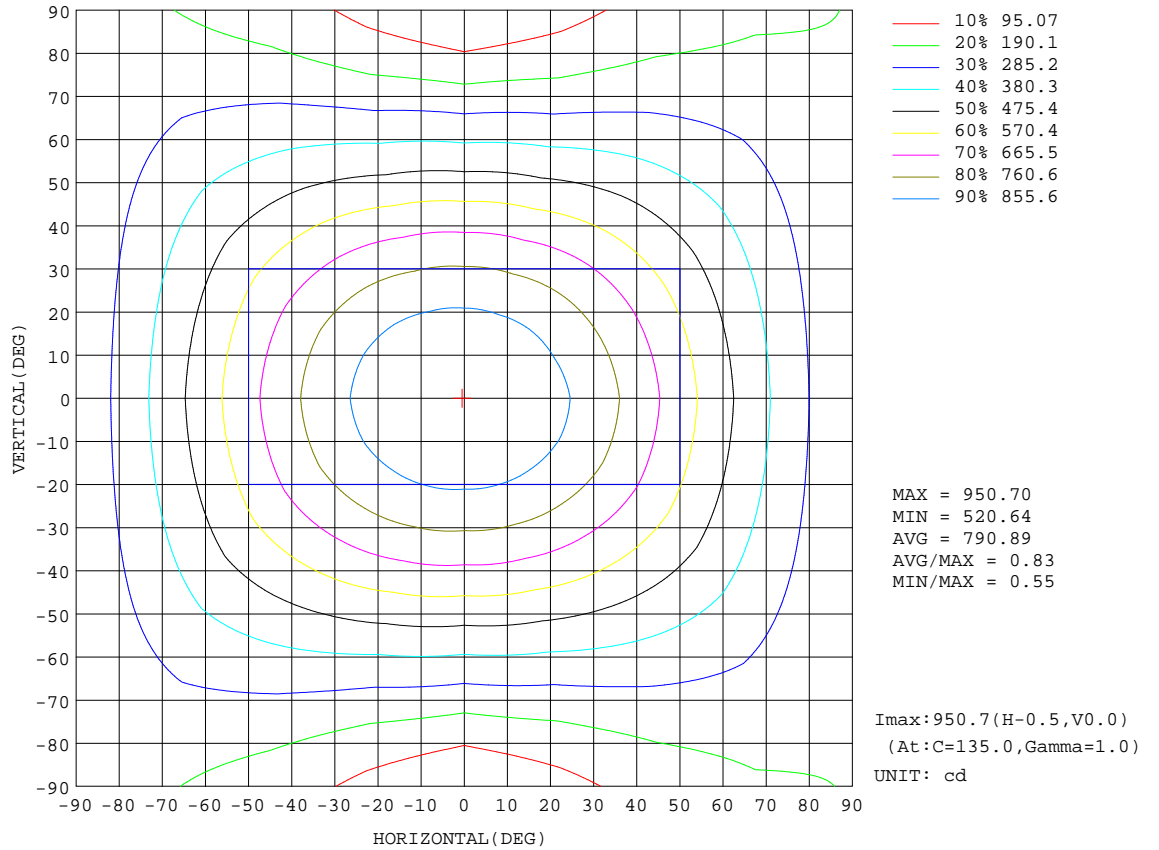


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: NEIKO
 Test Date: 30 August 2023

γ Range: 0 - 130DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 9.770m [K=1.0000]
 Remarks:

AAI Figure

Test:U:24.115V I:1.0766A P:25.951W PF:1.0000 Freq:50.00Hz Lamp Flux:3176.21x1 lm		
NAME: WP18W-CC-MS-24V	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20230830A22
MFR.:	SUR.:0.1*0.6	Shielding Angle:

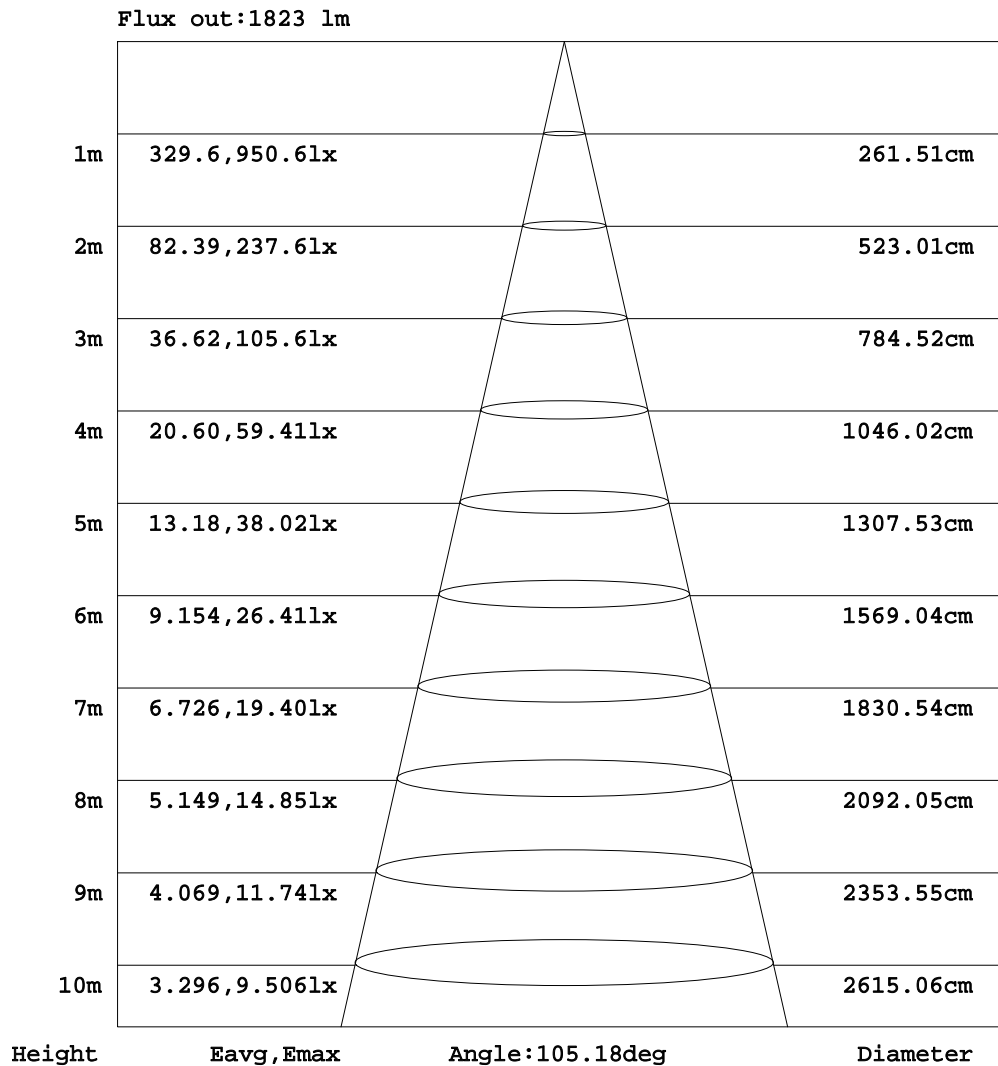


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:NEIKO
 Test Date:30 August 2023

γ Range: 0 - 130DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:9.770m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:24.115V I:1.0766A P:25.951W PF:1.0000 Freq:50.00Hz Lamp Flux:3176.21x1 lm		
NAME: WP18W-CC-MS-24V	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20230830A22
MFR.:	SUR.:0.1*0.6	Shielding Angle:

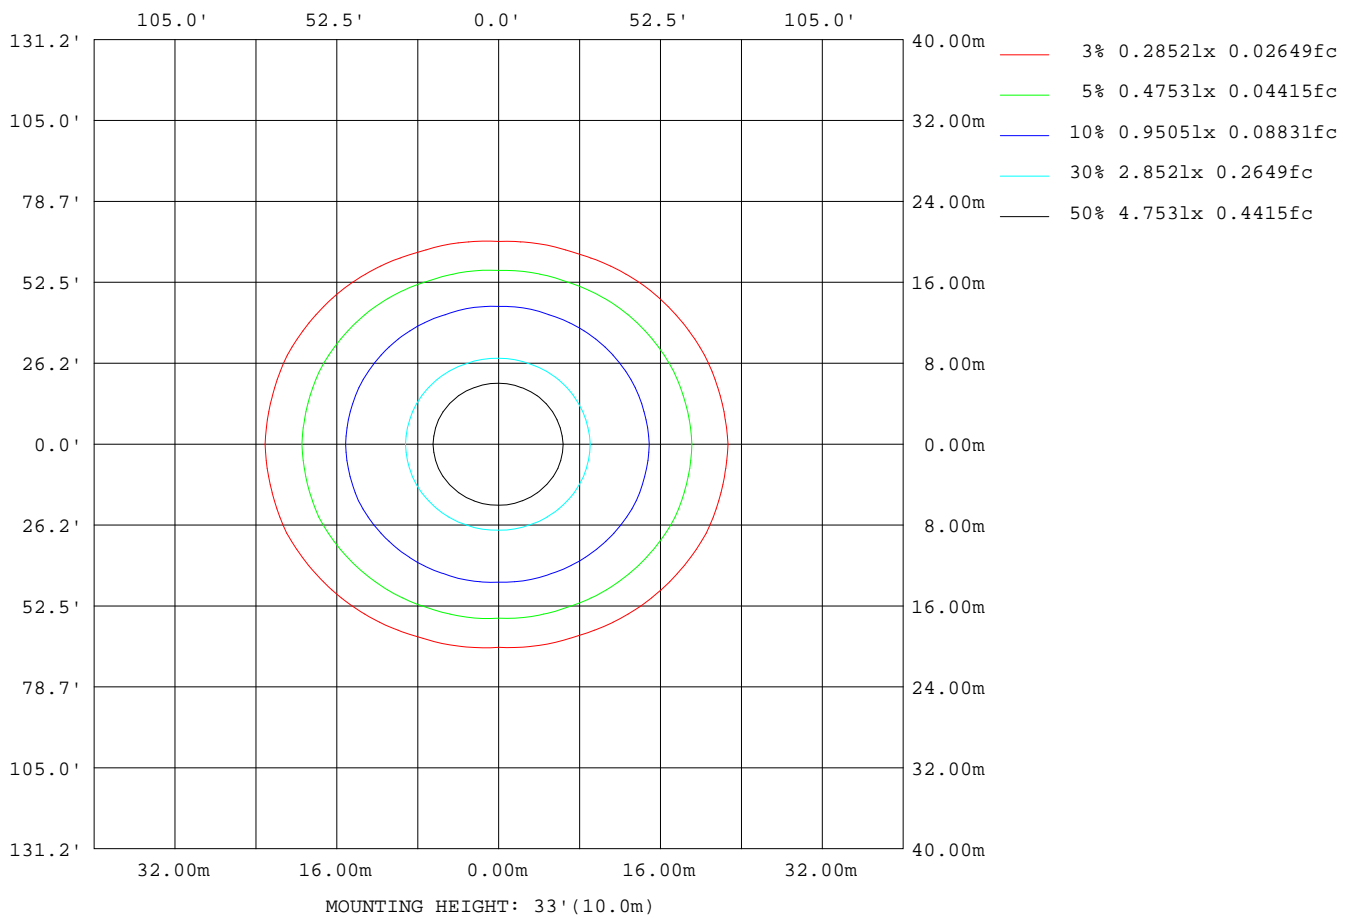

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:NEIKO
 Test Date:30 August 2023

γ Range: 0 - 130DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:9.770m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:24.115V I:1.0766A P:25.951W PF:1.0000 Freq:50.00Hz Lamp Flux:3176.21x1 lm		
NAME: WP18W-CC-MS-24V	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20230830A22
MFR.:	SUR.:0.1*0.6	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	18062
L_0~180(75)av	22344
L_0~180(85)av	46788
L_90~270(65)av	11822
L_90~270(75)av	10440
L_90~270(85)av	9604
L_45(65)av	15148
L_45(75)av	17477
L_45(85)av	33511

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:NEIKO
 Test Date:30 August 2023

γ Range: 0 - 130DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:9.770m [K=1.0000]
 Remarks:

Planar Illuminance Curve

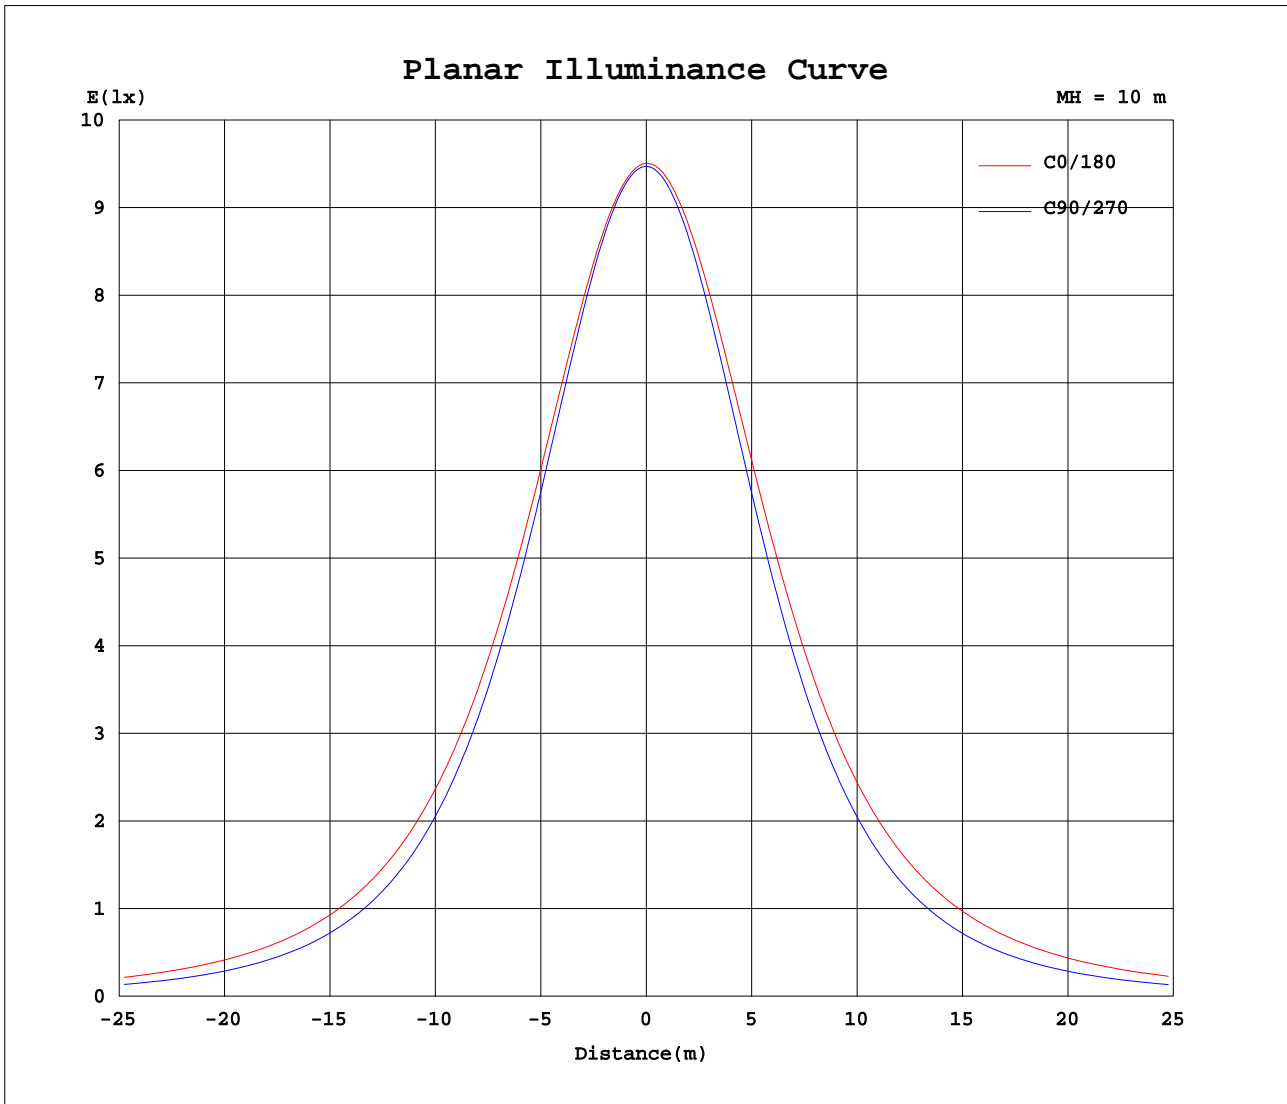

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: NEIKO
 Test Date: 30 August 2023

γ Range: 0 - 130DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 9.770m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.115V I:1.0766A P:25.951W PF:1.0000 Freq:50.00Hz Lamp Flux:3176.21x1 lm		
NAME: WP18W-CC-MS-24V	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20230830A22
MFR.:	SUR.:0.1*0.6	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	948	948	948	948	948	948	948	948	948	948	948	948	948	948	948	948			
5	942	943	942	942	943	944	945	945	945	944	944	943	942	941	942	942			
10	930	929	928	927	927	929	932	935	935	933	931	927	926	925	927	928			
15	910	908	904	902	901	905	911	917	917	914	909	902	899	899	903	906			
20	883	880	872	867	865	872	881	892	893	888	879	868	864	864	871	877			
25	850	846	833	824	821	830	844	860	863	856	842	826	819	820	832	842			
30	811	805	788	774	769	781	800	822	826	817	798	776	767	770	786	801			
35	767	760	737	718	711	725	751	778	785	773	749	720	709	713	735	754			
40	719	709	682	657	648	665	696	730	738	724	694	660	646	652	679	703			
45	667	656	623	593	582	601	639	678	688	672	636	596	579	587	620	649			
50	613	600	562	527	513	535	578	623	636	617	576	529	510	520	558	593			
55	558	543	499	459	443	469	516	567	581	561	514	462	440	453	496	536			
60	502	486	438	391	372	400	454	510	526	504	453	394	369	385	434	478			
65	445	428	378	325	301	333	394	452	471	447	392	328	298	318	374	421			
70	390	372	320	260	231	268	335	396	414	391	333	263	229	254	316	366			
75	336	318	266	201	163	208	280	341	358	336	278	203	161	195	262	312			
80	284	267	215	148	101	153	228	288	305	284	227	150	99.0	142	212	261			
85	235	220	171	103	51.1	108	182	239	254	235	181	105	49.4	98.4	167	214			
90	192	178	132	69.5	23.6	72.8	142	194	209	190	141	71.1	22.4	65.6	129	173			
95	155	142	100	45.8	18.1	48.3	109	156	169	152	108	47.2	17.5	42.9	98.0	138			
100	123	111	74.4	29.4	14.8	31.1	81.0	123	134	120	80.6	30.4	14.2	27.3	72.3	107			
105	95.8	85.1	53.4	18.3	11.9	19.3	58.6	94.4	105	92.0	58.1	18.8	11.5	16.7	51.5	82.0			
110	72.6	63.1	36.5	11.1	9.61	11.5	40.5	70.7	79.9	68.7	40.2	11.2	9.25	10.2	35.0	60.5			
115	52.8	44.9	23.3	8.47	7.75	8.61	26.2	50.8	58.5	49.2	25.9	8.41	7.42	7.99	22.0	42.8			
120	36.6	30.0	13.3	6.87	6.29	6.94	15.1	34.5	40.9	33.2	14.8	6.86	6.02	6.54	12.3	28.2			
125	23.3	18.1	7.42	5.70	5.20	5.73	8.04	21.2	26.3	20.3	7.75	5.71	5.00	5.47	6.75	16.6			
130	12.9	9.44	6.11	4.94	4.43	4.90	6.34	11.2	14.7	10.7	6.24	4.88	4.36	4.68	5.76	8.57			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:NEIKO
 Test Date:30 August 2023

γ Range: 0 - 130DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:9.770m [K=1.0000]
 Remarks: