




POWER-LITE®

Certainty at The Speed of Light

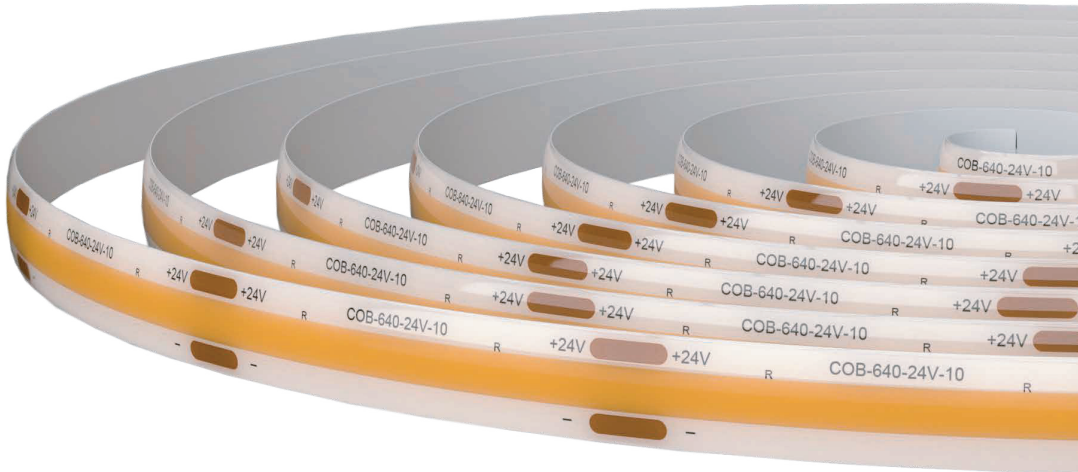

LED COB FLEXIBLE

STRIP LIGHT

FLS100W/FLS200W-COB

The POWER-LITE® COB LED Strip Light is designed to be installed into many different applications where a high lumen output is required. The COB technology used, provides a dotless LED strip light solution.

APPLICATIONS

Residential
Retail
Commercial



☎ 1800 909 306
🌐 nedlandsgroup.com.au
✉ sales@nedlandsgroup.com.au




POWER-LITE®

Certainty at The Speed of Light

DIMENSIONS

FLS200W 10m Roll

FLS100W 5m Roll



SCDM

<3 Macadam steps

Efficacy

Up to 192lm/W

CRI

90

LED Driver

Supplied Separately

Carton Qty

1

PRODUCT	SPECIFICATIONS				CODE
200W LED FLEXIBLE STRIP LIGHT		20W/m		40,000 hrs LM80	 3000K 1920lm/m FLS200W-WW-COB
		640 LEDs/m		Working Temp -20°C to +60°C	 4000K 1920lm/m FLS200W-NW-COB
		>0.9		LED Chip 2835	
100W LED FLEXIBLE STRIP LIGHT		20W/m		40,000 hrs LM80	 3000K 1920lm/m FLS100W-WW-COB
		640 LEDs/m		Working Temp -20°C to +60°C	 4000K 1920lm/m FLS100W-NW-COB
		>0.9		LED Chip 2835	 3000K 1920lm/m FLS100W-WW-IP67-COB

ACCESSORIES	OPTIONS				CODE
		24W		Male Connector	 70 x 70 x 40mm FLS24W-D
		DC24V		3 year warranty	 IP IP20
		60W		5 year warranty	 180 x 45 x 32mm FLS48W-D
		DC24V		IP IP67	
		100W		5 year warranty	 250 x 42 x 30mm FLS-D-100W
		DC24V		IP IP67	
		200W		5 year warranty	 240 x 68 x 42mm FLS-D-200W
		DC24V		IP IP67	
		250W		5 year warranty	 245 x 65 x 40mm FLS-D-250W
		DC24V		IP IP67	

 IP20

 DC24V

 120° Beam Angle



POWER-LITE®

Certainty at The Speed of Light

ACCESSORIES

OPTIONS

CODE

ALUMINIUM EXTRUSION



4M



Mount Type
Surface or
Suspended



Black



White




8 & 10mm
Strip width



IP40

AL-50/70-B

AL-50/70-W



2.5M



Mount Type
Recessed



Anodised
Finish



8 & 10mm
Strip width



IP40

PL-A020



2.5M



Mount Type
Recessed



Anodised
Finish



8 & 10mm
Strip width



IP40

PL-AL001



2.5M



Mount Type
Recessed or
Surface



Anodised
Finish



8 & 10mm
Strip width



IP40

PL-AL002



2.5M



Mount Type
Corner installation



Anodised
Finish



8 & 10mm
Strip width



IP40

PL-AL006



2.5M



Mount Type
Surface



Anodised
Finish



8 & 10mm
Strip width



IP40

PL-A043



2.5M



Mount Type
Recessed or
Surface



Silver



10mm
Strip width



IP67

PL-AL071F

P

IP20



DC24V



120°
Beam Angle

