



POWER-LITE®


Certainty at The Speed of Light



LT28W-120/30-AC
WITH AIR SLOTS



LT28W-120/30
WITHOUT AIR SLOTS

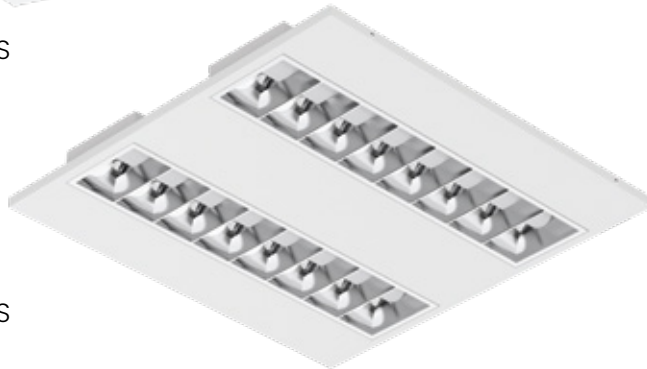

LT28W-60SQ
WITHOUT AIR SLOTS

LED LOUVRED

TROFFER

LT28W-120/30
LT28W-120/30-AC
LT28W-60SQ

The POWER-LITE® LED Louvred Troffer is a modular design with UGR<19. Its adopted high lumen SMD LED light source, special optic design makes it a uniform and low glare visual experience. The air slot option is applicable, where air conditioning boots are required to be installed to the light fitting.



E2362



WARRANTY

RoHS



APPLICATIONS

Office | Retail
Healthcare
Commercial



☎ 1800 909 306
🌐 nedlandsgroup.com.au
✉ sales@nedlandsgroup.com.au




POWER-LITE®


Certainty at The Speed of Light

DIMENSIONS (mm) - LT28W-120/30

- A 1192
- B 292
- C 48
- D 110
- E 1090

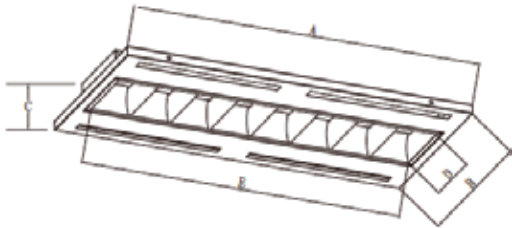

DIMENSIONS (mm) - LT28W-60SQ

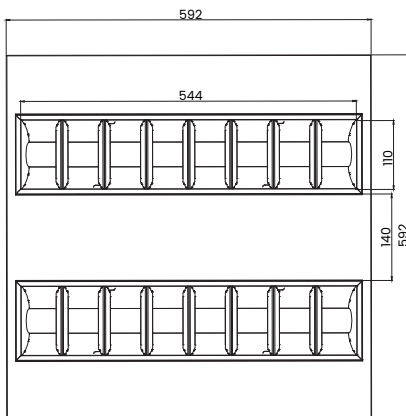

LED Chip
SMD2835

Life Expectancy
50,000hrs L90 B10

Power Factor
>0.95

CRI
>90

Operating Temp.
-10°C ~ 40°C

UGR
<19

SCDM
<3 MacAdam Steps

LED Driver
Non-Dimable

Material
Steel Housing
Louver (PC Cover & Aluminium Reflector)

LED Driver Options
DALI
TRIAC

28W

4000K
3121-3508lm

AC220-240V

White Frame Colour

IP20

90° Beam Angle

PRODUCT	OPTIONS	LUMENS	CODE
LED LOUVRED TROFFER	WITHOUT AIR SLOTS	3149	LT28W-120/30
LED LOUVRED TROFFER	WITH AIR SLOTS	3121	LT28W-120/30-AC
LED LOUVRED TROFFER	WITHOUT AIR SLOTS	3508	LT28W-60SQ