


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.24V I:0.1076A P:24.806W PF:0.9600 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2682.05x1 lm		
Name: OYS25W	Type: 25W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 0.185	shielding angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 108.12 lm/W			
MODEL	OYS25W	Imax (cd)	944.4	S/MH(C0/180)	1.26
NOMINAL POWER(W)	25	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	2682.1	η UP,DN(C0-180)	0.0,49.5
NOMINAL FLUX(lm)	2682.05	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.5
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	240	η down (%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

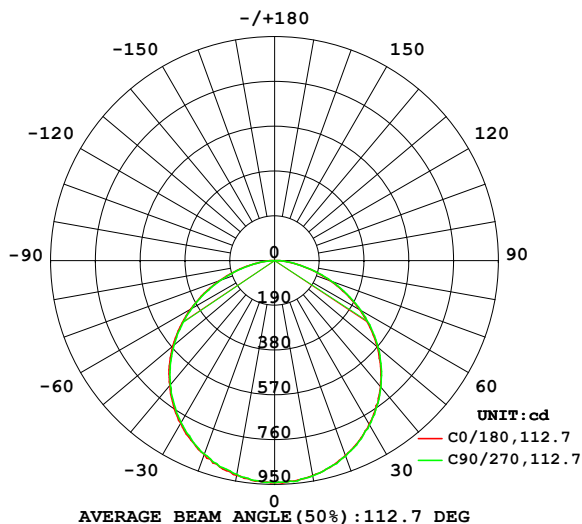

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

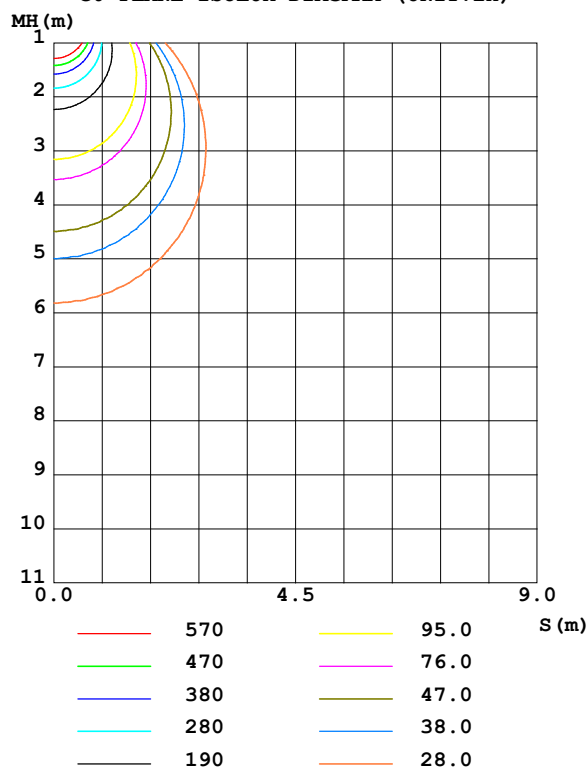

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	925.7	922.6	920.9	922.6	927.2	924.4	927.7	926.3	0- 10	89.11	89.11	3.32,3.32
20	874.6	873.1	873.3	874.6	880.4	880.9	882.6	876.1	10- 20	255.5	344.6	12.8,12.8
30	797.4	797.4	793.9	796.5	801.1	805.3	805.9	799.1	20- 30	388.2	732.8	27.3,27.3
40	692.3	691.4	688.6	690.0	699.0	701.0	701.3	696.7	30- 40	469.6	1202	44.8,44.8
50	563.4	559.2	557.1	559.7	569.4	571.3	573.4	563.4	40- 50	487.7	1690	63,63
60	411.5	406.4	404.6	405.0	417.1	417.0	421.7	412.2	50- 60	438.4	2128	79.4,79.4
70	247.2	244.3	241.6	240.6	252.1	254.3	257.0	247.7	60- 70	327.0	2456	91.6,91.6
80	95.65	96.32	91.50	92.84	99.27	105.0	103.1	98.38	70- 80	179.5	2635	98.2,98.2
90	1.511	1.381	1.379	1.420	1.669	2.539	3.115	2.436	80- 90	47.05	2682	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1448.2 lm

%lum = 54.0%

%lamp = 54.0%

Conical surface Flux(120deg): 2128.5 lm

%lum = 79.4%


%lamp = 79.4%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Chen Songyu
 Test Date:2025-02-26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.520m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.24V I:0.1076A P:24.806W PF:0.9600 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2682.05x1 lm		
Name: OYS25W	Type: 25W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 0.185	shielding angle:

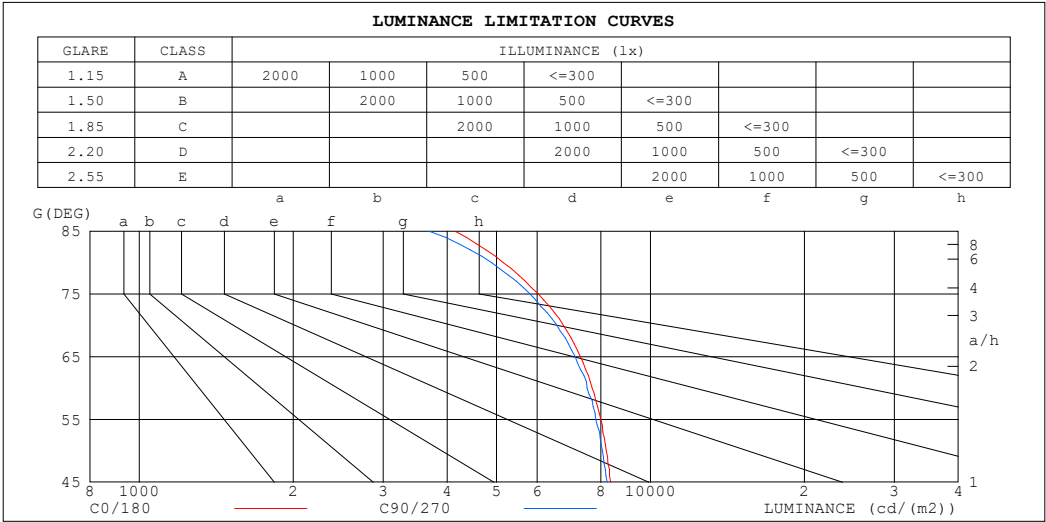

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4147	3689
80	5151	4894
75	6035	5818
70	6758	6561
65	7293	7126
60	7695	7516
55	7991	7818
50	8197	8050
45	8357	8227


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.24V I:0.1076A P:24.806W PF:0.9600 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2682.05x1 lm		
Name: OYS25W	Type: 25W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 0.185	shielding angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

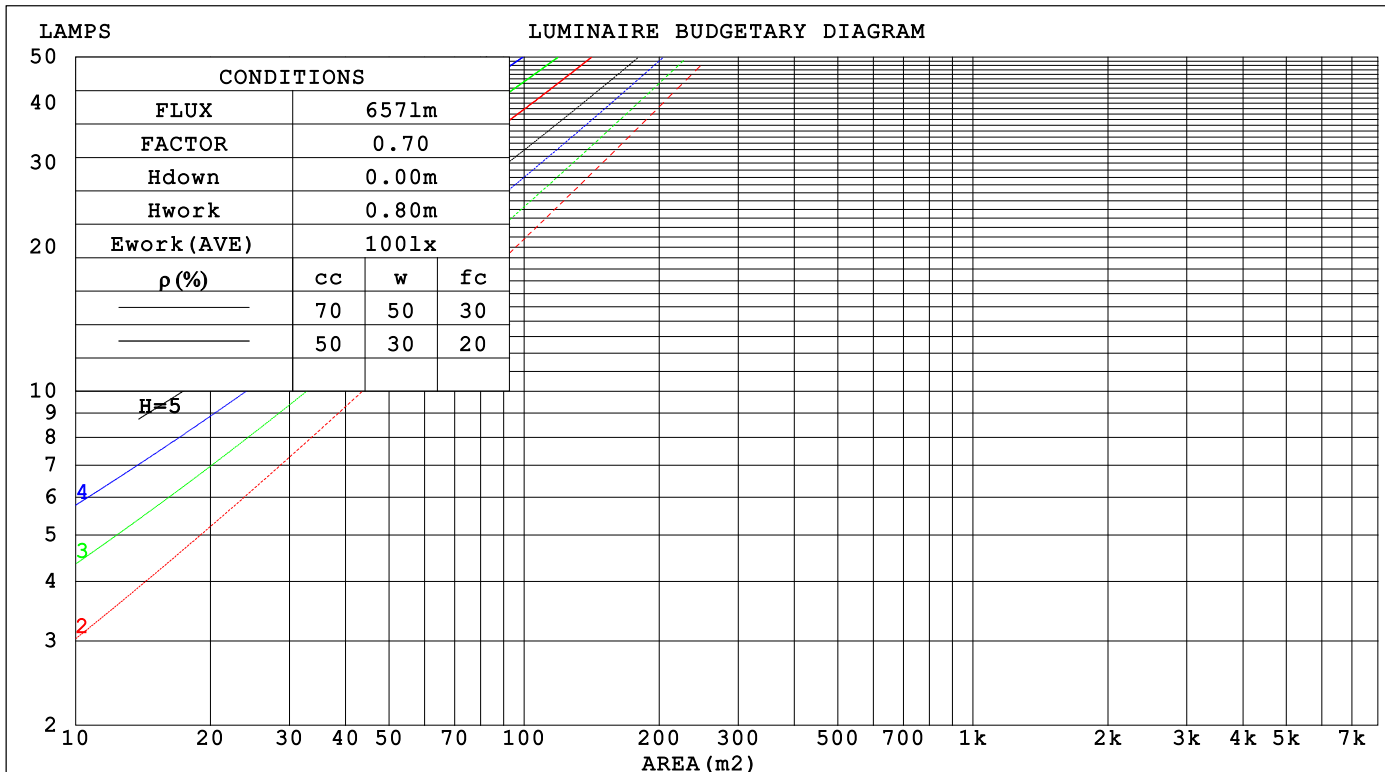

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.24V I:0.1076A P:24.806W PF:0.9600 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2682.05x1 lm		
Name: OYS25W	Type: 25W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 0.185	shielding angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.307	.174	.055	.300	.171	.054	.286	.164	.052	.274	.158	.051	.263	.152	.049		
2.0	.290	.159	.049	.283	.156	.048	.272	.151	.047	.261	.146	.046	.251	.142	.045		
3.0	.269	.143	.043	.263	.141	.042	.253	.137	.042	.243	.133	.041	.234	.130	.040		
4.0	.248	.129	.038	.243	.127	.038	.234	.124	.037	.226	.121	.037	.218	.118	.036		
5.0	.230	.117	.034	.225	.116	.034	.217	.113	.033	.210	.111	.033	.203	.108	.033		
6.0	.213	.107	.031	.209	.106	.030	.202	.104	.030	.195	.101	.030	.189	.099	.030		
7.0	.198	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027		
8.0	.185	.091	.025	.182	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025		
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023		
10.0	.163	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015		
2.0	.172	.132	.098	.147	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011		
3.0	.164	.114	.074	.141	.099	.065	.097	.068	.045	.056	.040	.027	.018	.013	.009		
4.0	.157	.101	.058	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007		
5.0	.149	.091	.047	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006		
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005		
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004		
8.0	.129	.069	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.004		
9.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003		
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.24V I:0.1076A P:24.806W PF:0.9600 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2682.05x1 lm										
Name: OYS25W					Type: 25W			Weight:		
SPEC.: 3000K					DIM.:			Instrument No.: HUP-IES-B3		
MFR.: EVERFINE					SUR.: 0.185			shielding angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.1	21.6	20.3	21.8	22.0	20.0	21.5	20.3	21.7	21.9
3H	21.5	22.9	21.8	23.1	23.4	21.4	22.8	21.7	23.0	23.3
4H	22.0	23.4	22.4	23.6	23.9	21.9	23.3	22.2	23.5	23.8
6H	22.4	23.7	22.7	23.9	24.2	22.3	23.5	22.6	23.8	24.1
8H	22.5	23.7	22.8	24.0	24.3	22.3	23.6	22.7	23.8	24.1
12H	22.5	23.7	22.9	24.0	24.3	22.4	23.5	22.7	23.8	24.1
4H 2H	20.7	22.0	21.0	22.2	22.5	20.6	21.9	20.9	22.2	22.4
3H	22.3	23.4	22.6	23.7	24.0	22.2	23.3	22.5	23.6	23.9
4H	22.9	24.0	23.3	24.3	24.6	22.8	23.9	23.2	24.2	24.5
6H	23.4	24.3	23.8	24.7	25.0	23.3	24.2	23.7	24.6	24.9
8H	23.5	24.4	23.9	24.8	25.2	23.4	24.3	23.8	24.6	25.0
12H	23.6	24.4	24.0	24.8	25.2	23.5	24.3	23.9	24.7	25.1
8H 4H	23.1	24.0	23.6	24.4	24.8	23.0	23.9	23.5	24.3	24.7
6H	23.7	24.5	24.2	24.9	25.3	23.6	24.4	24.1	24.8	25.2
8H	24.0	24.6	24.4	25.0	25.5	23.8	24.5	24.3	24.9	25.4
12H	24.1	24.7	24.6	25.1	25.6	24.0	24.5	24.4	25.0	25.5
12H 4H	23.1	24.0	23.6	24.3	24.7	23.1	23.9	23.5	24.2	24.7
6H	23.8	24.4	24.2	24.9	25.3	23.7	24.3	24.1	24.8	25.2
8H	24.0	24.6	24.5	25.1	25.5	23.9	24.5	24.4	24.9	25.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 2682 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.4)
Area: 0.10746 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.24V I:0.1076A P:24.806W PF:0.9600 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:2682.05x1 lm		
Name: OYS25W		Type: 25W		Weight:				
SPEC.: 3000K		DIM.:		Instrument No.: HUP-IES-B3				
MFR.: EVERFINE		SUR.: 0.185		shielding angle:				


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	49	65	55	48	41
1.00	76	65	58	75	64	58	73	66	57	50
1.25	83	73	66	82	72	65	79	71	65	57
1.50	88	78	71	87	78	71	84	76	70	62
2.00	95	87	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	83	74
3.00	102	96	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3℃
Operators: Chen Songyu
Test Date: 2025-02-26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.520m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.24V I:0.1076A P:24.806W PF:0.9600 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2682.05x1 lm		
Name: OYS25W	Type: 25W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 0.185	shielding angle:

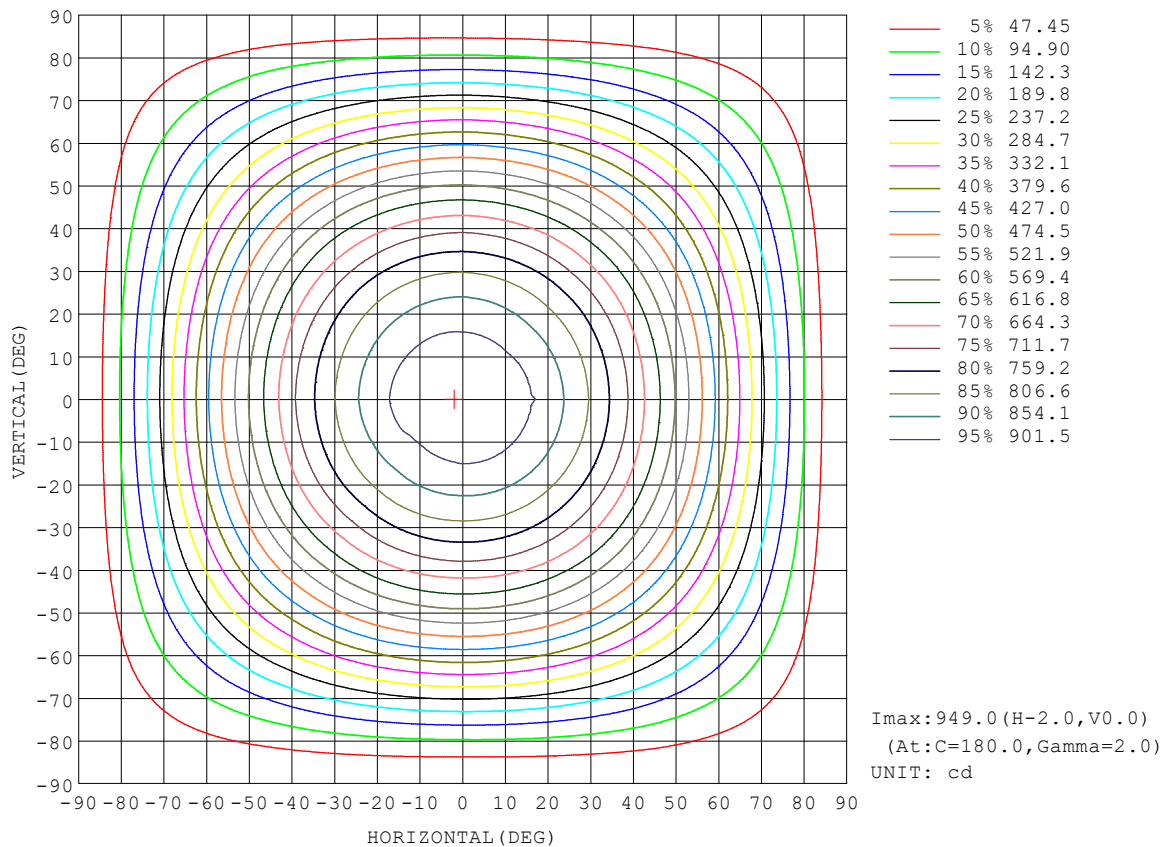


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.24V I:0.1076A P:24.806W PF:0.9600 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2682.05x1 lm		
Name: OYS25W	Type: 25W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 0.185	shielding angle:

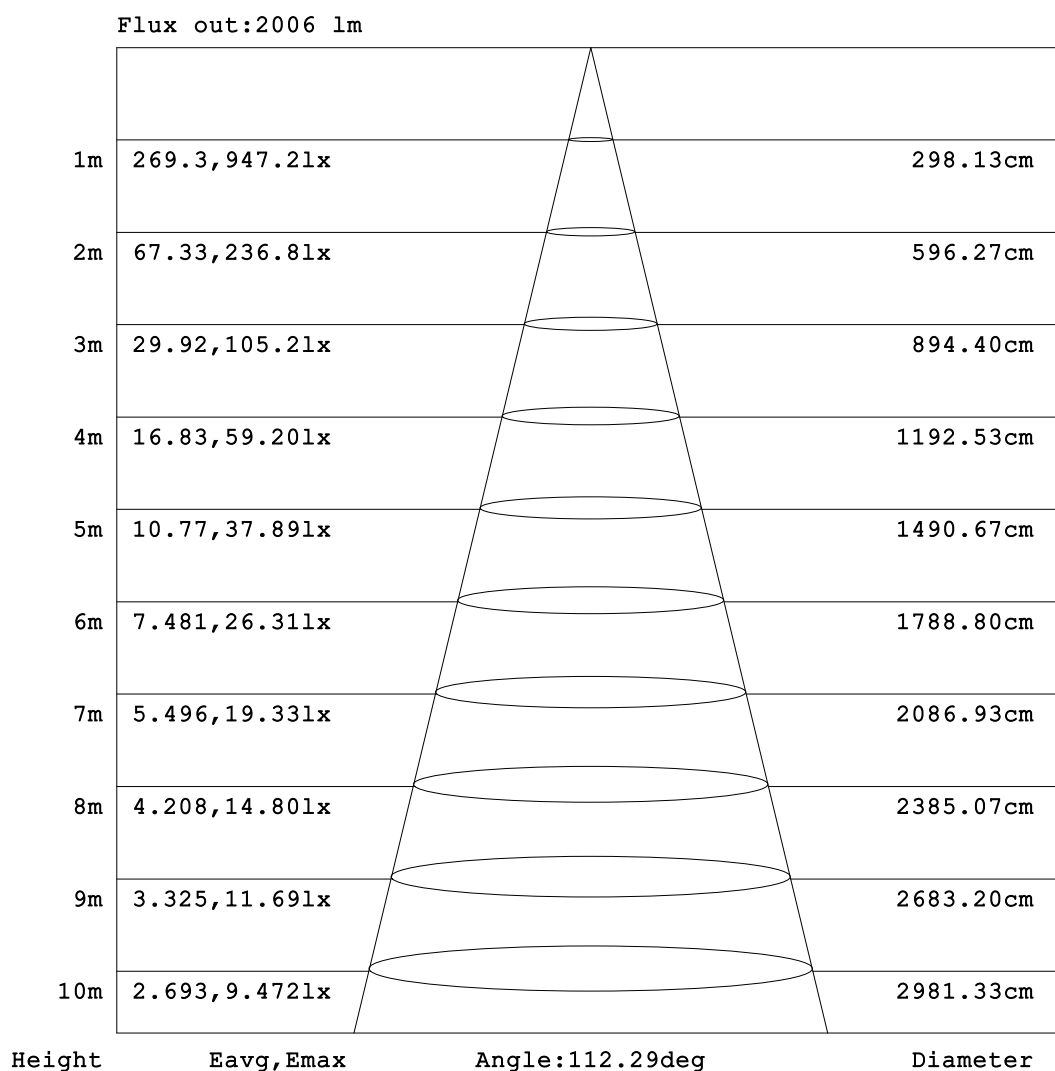


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.24V I:0.1076A P:24.806W PF:0.9600 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2682.05x1 lm		
Name: OYS25W	Type: 25W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 0.185	shielding angle:

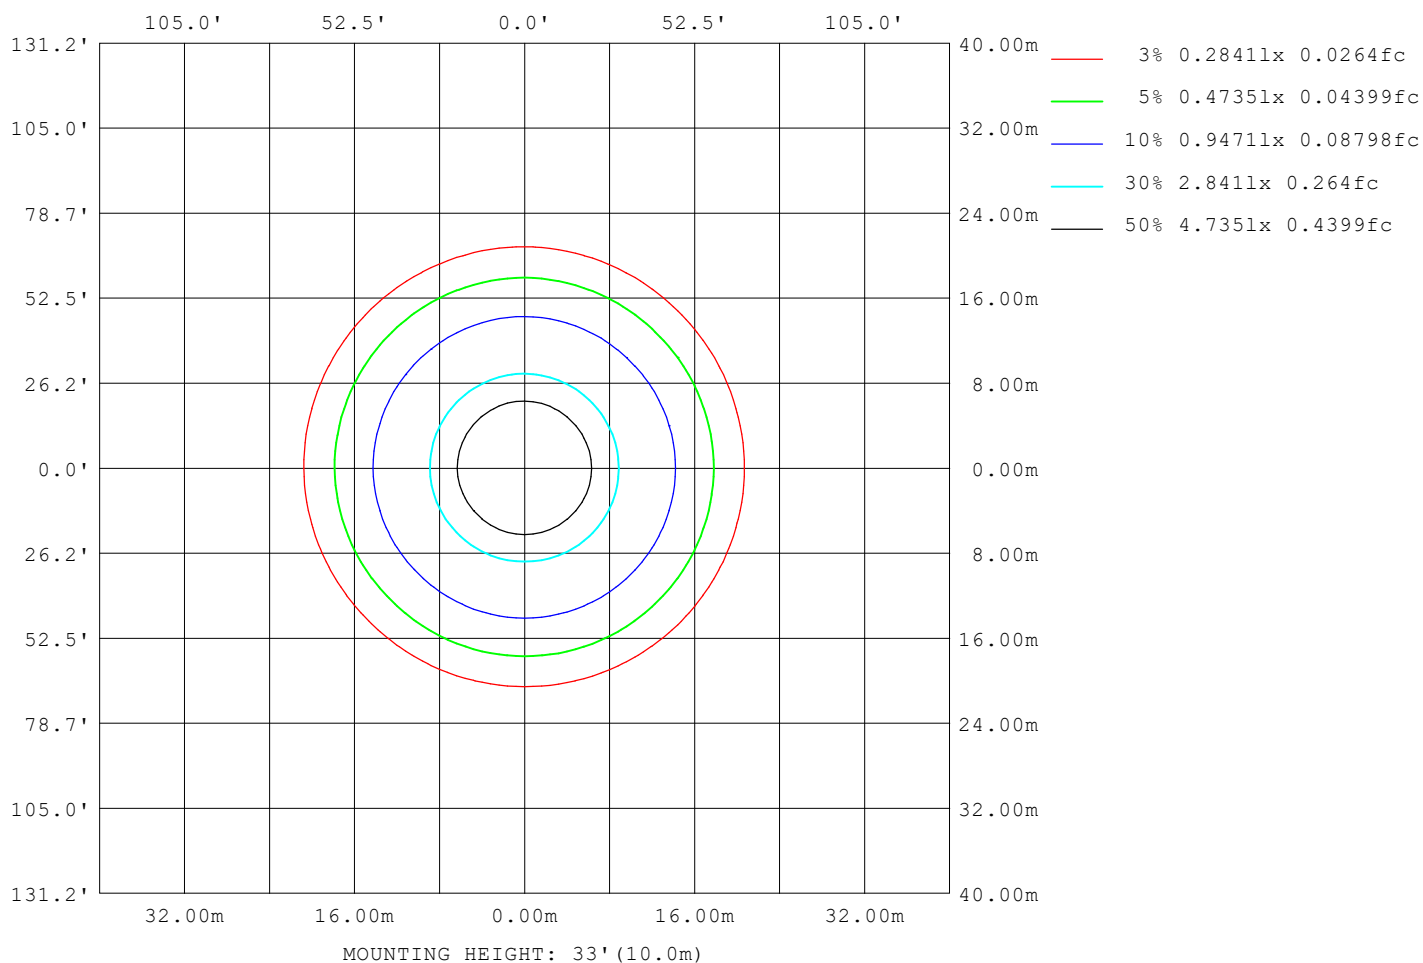

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Chen Songyu
Test Date: 2025-02-26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.520m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.24V I:0.1076A P:24.806W PF:0.9600 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2682.05x1 lm		
Name: OYS25W	Type: 25W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 0.185	shielding angle:


AvgL	cd/m2
L_0~180 (65) av	7327
L_0~180 (75) av	6090
L_0~180 (85) av	4268
L_90~270 (65) av	7323
L_90~270 (75) av	6094
L_90~270 (85) av	4166
L_45 (65) av	7231
L_45 (75) av	6054
L_45 (85) av	4390

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Chen Songyu
 Test Date:2025-02-26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.520m [K=1.0000]
 Remarks:

Planar Illuminance Curve

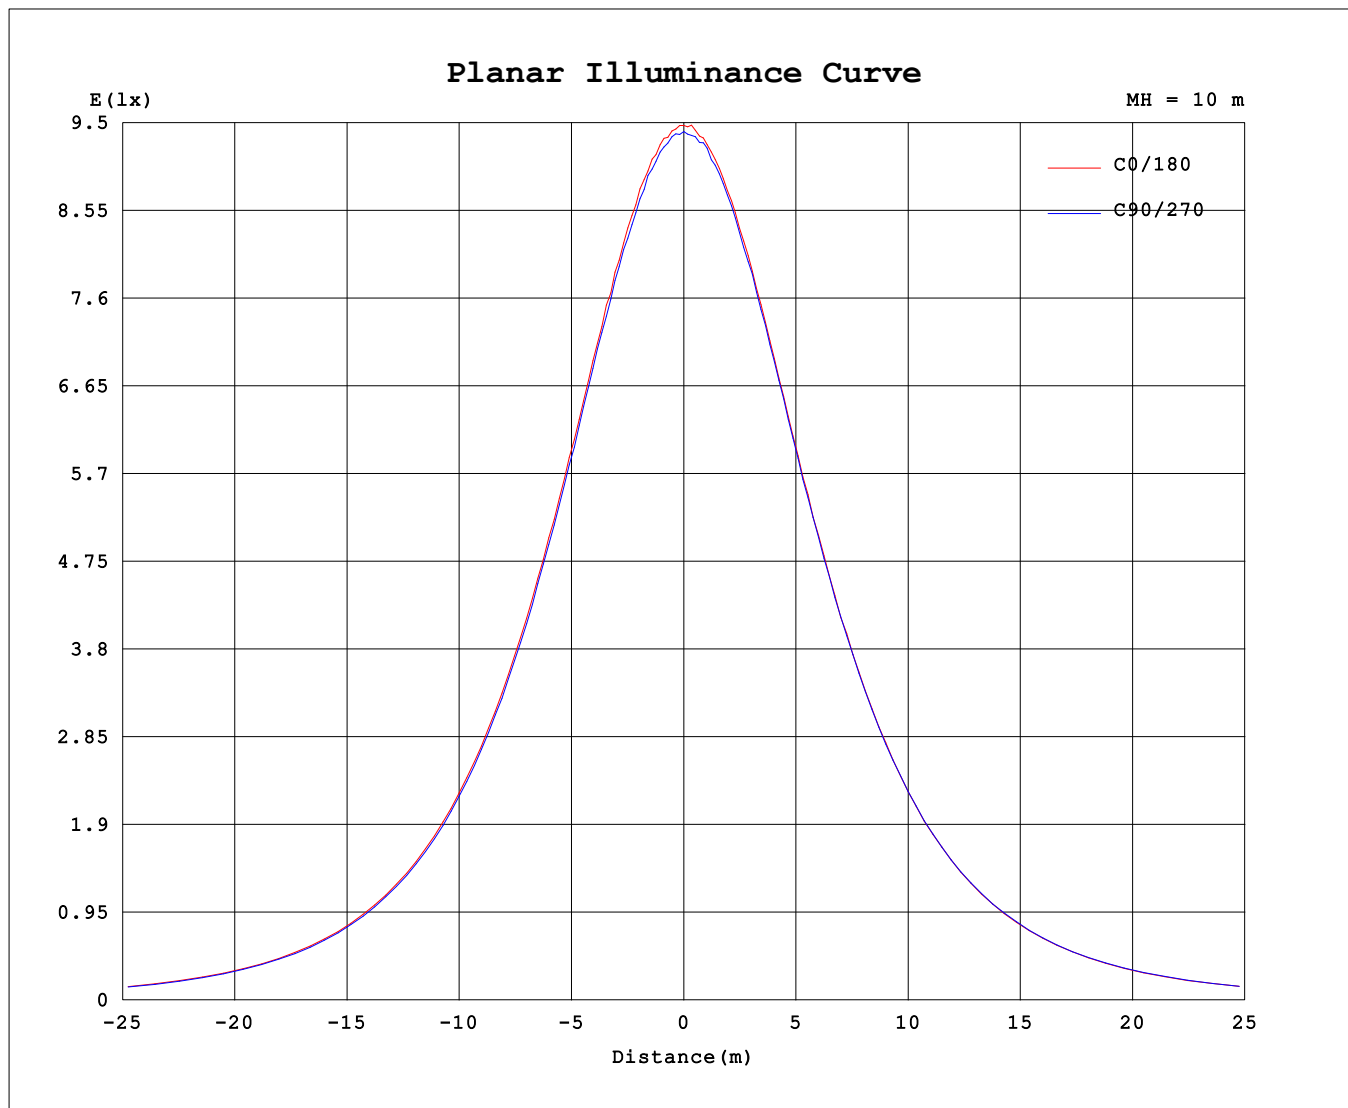

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Chen Songyu
Test Date: 2025-02-26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.520m [K=1.0000]
Remarks:

Test:U:240.24V I:0.1076A P:24.806W PF:0.9600 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2682.05x1 lm		
Name: OYS25W	Type: 25W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 0.185	shielding angle:

UNIT: cd

[illegible]

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

```