


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.15V I:0.0881A P:20.033W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2498.68x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 124.73 lm/W			
MODEL	SLB-40W-CC	Imax (cd)	796.1	S/MH(C0/180)	1.25
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	2498.7	η UP,DN(C0-180)	2.1,47.6
NOMINAL FLUX(lm)	2498.68	CIE CLASS	DIRECT	η UP,DN(C180-360)	2.2,48.0
LAMPS INSIDE	1	η up (%)	4.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	240	η down (%)	95.6	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

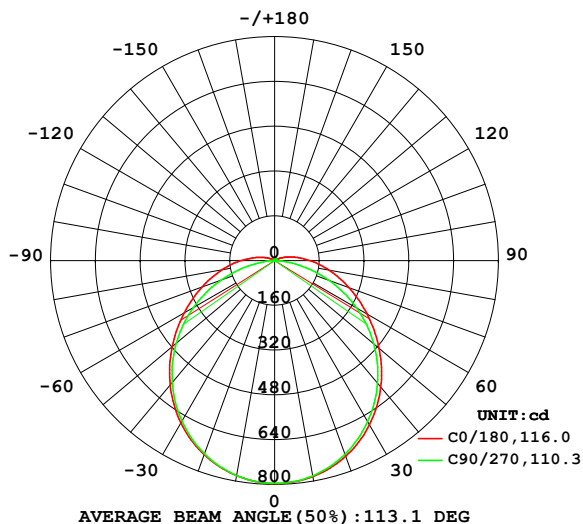

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

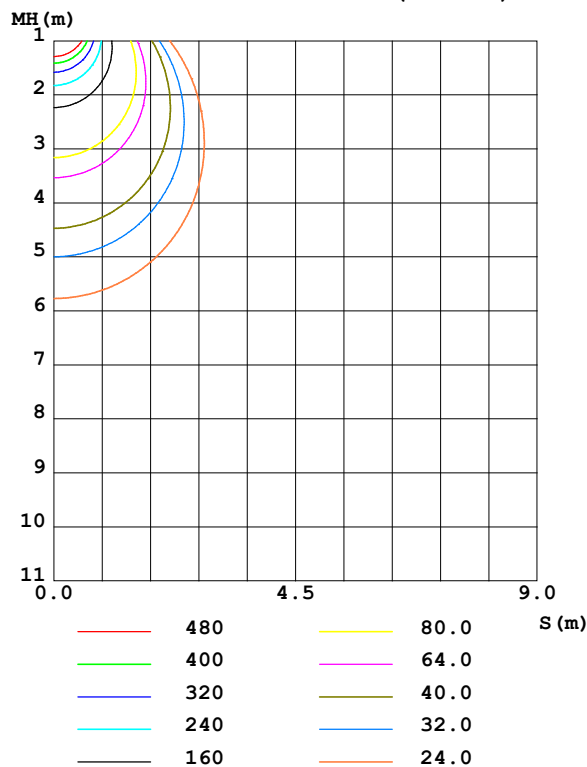

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	780.5	780.7	780.0	782.1	783.5	781.9	781.1	780.7	0- 10	75.28	75.28	3.01,3.01
20	737.7	736.4	734.3	738.8	743.4	739.4	736.2	736.9	10- 20	215.3	290.6	11.6,11.6
30	669.8	667.2	662.5	670.1	677.9	670.7	664.9	667.2	20- 30	325.5	616.1	24.7,24.7
40	580.7	575.3	569.1	579.3	590.2	579.8	572.4	575.7	30- 40	391.4	1007	40.3,40.3
50	477.7	467.4	458.5	471.1	487.5	471.9	462.6	467.9	40- 50	405.6	1413	56.6,56.6
60	372.9	350.8	334.7	354.1	381.6	354.8	339.0	351.4	50- 60	369.5	1783	71.3,71.3
70	275.6	240.3	201.9	242.4	282.9	243.3	206.4	240.4	60- 70	294.7	2077	83.1,83.1
80	190.4	147.2	73.93	148.9	197.5	149.6	76.99	146.9	70- 80	200.6	2278	91.2,91.2
90	120.5	76.96	1.335	79.18	127.0	79.95	1.493	76.78	80- 90	111.6	2389	95.6,95.6
100	66.93	32.06	2.068	34.14	72.72	34.69	2.137	31.82	90-100	55.90	2445	97.9,97.9
110	30.11	9.800	3.025	11.05	34.55	11.34	3.091	9.699	100-110	24.61	2470	98.9,98.9
120	10.34	4.271	4.026	4.387	12.67	4.478	4.083	4.332	110-120	9.248	2479	99.2,99.2
130	5.103	5.153	5.070	5.109	5.501	5.111	5.096	5.200	120-130	4.801	2484	99.4,99.4
140	5.931	6.092	6.060	6.049	6.116	6.014	6.062	6.118	130-140	4.327	2488	99.6,99.6
150	6.737	6.923	6.876	6.887	6.767	6.812	6.870	6.918	140-150	4.053	2492	99.7,99.7
160	7.468	7.534	7.482	7.513	7.487	7.503	7.539	7.602	150-160	3.320	2496	99.9,99.9
170	8.079	8.027	7.966	8.038	8.141	8.012	8.039	8.096	160-170	2.201	2498	100,100
180	8.405	8.284	8.230	8.311	8.428	8.246	8.262	8.299	170-180	0.7796	2499	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1211.8 lm

%lum = 48.5%

%lamp = 48.5%

Conical surface Flux(120deg): 1782.5 lm

%lum = 71.3%


%lamp = 71.3%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Chen Songyu
 Test Date:2025-02-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.520m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.15V I:0.0881A P:20.033W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2498.68x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

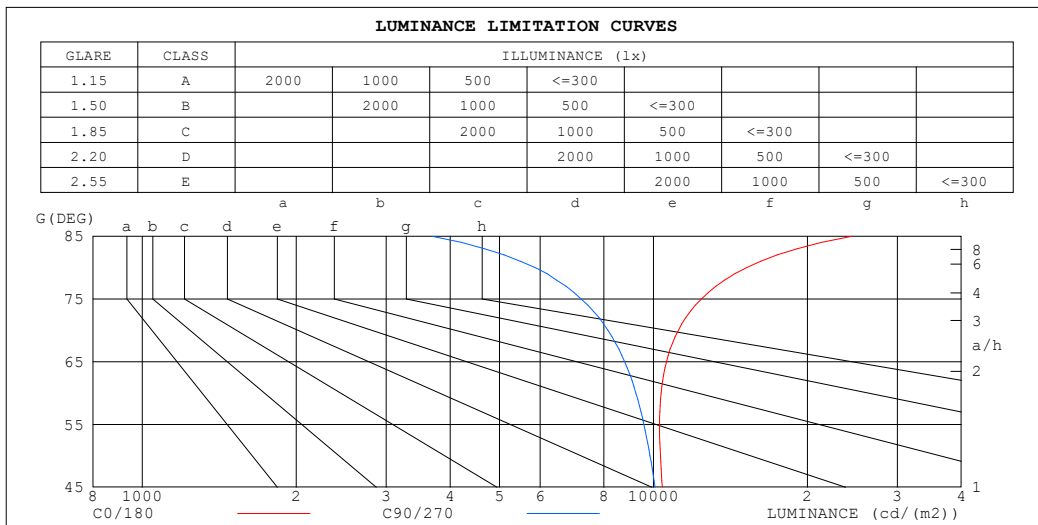

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	24437	3686
80	15220	5875
75	12408	7223
70	11183	8147
65	10600	8784
60	10351	9239
55	10280	9578
50	10316	9844
45	10408	10068


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Chen Songyu
Test Date: 2025-02-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.520m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.15V I:0.0881A P:20.033W PF:0.9466 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2498.68x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

pcc	80%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

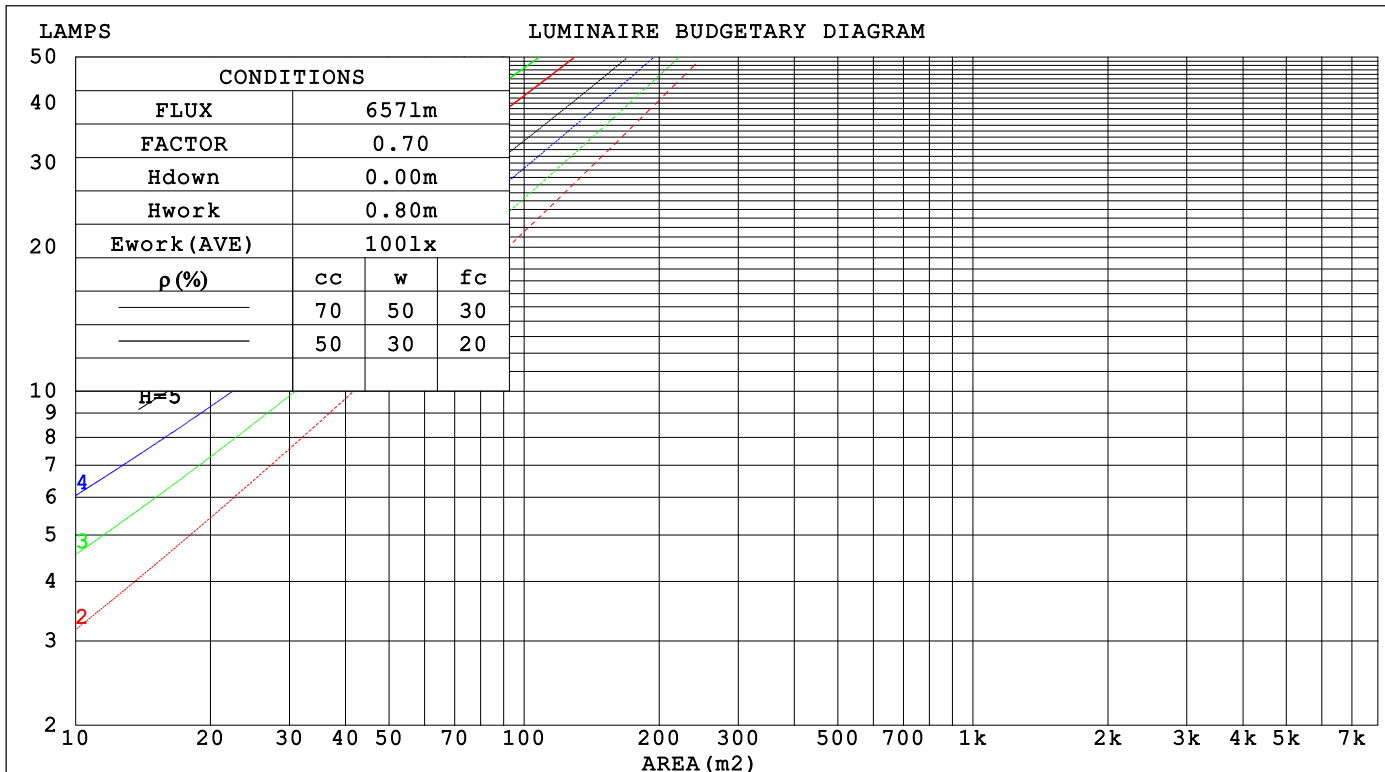

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: Chen Songyu
 Test Date: 2025-02-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.520m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.15V I:0.0881A P:20.033W PF:0.9466 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2498.68x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.342	.194	.062	.333	.190	.060	.317	.182	.058	.303	.175	.056	.289	.168	.054		
2.0	.309	.169	.052	.301	.166	.051	.287	.160	.050	.274	.154	.048	.262	.148	.047		
3.0	.280	.149	.045	.274	.147	.044	.261	.142	.043	.249	.137	.042	.239	.132	.041		
4.0	.256	.133	.039	.250	.131	.039	.239	.127	.038	.228	.123	.037	.219	.119	.036		
5.0	.235	.120	.035	.230	.118	.034	.220	.114	.034	.210	.111	.033	.201	.108	.032		
6.0	.217	.109	.031	.212	.107	.031	.203	.104	.030	.195	.101	.030	.187	.098	.029		
7.0	.201	.099	.028	.197	.098	.028	.189	.095	.027	.181	.093	.027	.174	.090	.027		
8.0	.187	.092	.026	.184	.090	.026	.176	.088	.025	.169	.086	.025	.163	.084	.024		
9.0	.175	.085	.024	.172	.084	.023	.165	.082	.023	.159	.080	.023	.153	.078	.022		
10.0	.165	.079	.022	.161	.078	.022	.155	.076	.021	.149	.074	.021	.144	.072	.021		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.224	.224	.224	.191	.191	.191	.131	.131	.131	.075	.075	.075	.024	.024	.024		
1.0	.216	.189	.165	.185	.163	.142	.126	.112	.098	.073	.065	.057	.023	.021	.019		
2.0	.208	.166	.130	.178	.143	.112	.122	.099	.078	.071	.057	.046	.023	.019	.015		
3.0	.200	.148	.107	.172	.128	.093	.118	.089	.065	.068	.052	.038	.022	.017	.013		
4.0	.193	.135	.091	.165	.117	.079	.114	.081	.056	.066	.048	.033	.021	.016	.011		
5.0	.185	.125	.081	.159	.108	.070	.109	.076	.050	.063	.044	.029	.020	.014	.010		
6.0	.178	.117	.073	.153	.101	.064	.105	.071	.045	.061	.042	.027	.020	.014	.009		
7.0	.171	.110	.067	.147	.095	.059	.101	.067	.042	.059	.039	.025	.019	.013	.008		
8.0	.164	.104	.063	.141	.090	.055	.098	.063	.039	.057	.037	.023	.018	.012	.008		
9.0	.158	.099	.060	.136	.086	.052	.094	.061	.037	.055	.036	.022	.018	.012	.007		
10.0	.152	.095	.057	.131	.083	.050	.091	.058	.035	.053	.034	.021	.017	.011	.007		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.15V I:0.0881A P:20.033W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2498.68x1 lm											
Name: SLB-40W-CC						Type: 20W			Weight:		
SPEC.: 3000K						DIM.:			Instrument No.: HUP-IES-B3		
MFR.: EVERFINE						SUR.: 1.080*0.067			shielding angle:		
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		20.7	22.1	21.0	22.4	22.7	20.3	21.8	20.6	22.1	22.4
3H		22.6	24.0	22.9	24.3	24.6	21.8	23.1	22.1	23.5	23.8
4H		23.6	24.9	24.0	25.2	25.6	22.3	23.6	22.7	24.0	24.3
6H		24.6	25.9	25.0	26.2	26.6	22.7	23.9	23.1	24.3	24.7
8H		25.2	26.4	25.6	26.8	27.2	22.8	24.0	23.2	24.3	24.7
12H		25.9	27.0	26.3	27.4	27.8	22.8	24.0	23.2	24.3	24.7
4H 2H		21.2	22.6	21.6	22.9	23.2	21.0	22.3	21.3	22.6	23.0
3H		23.4	24.5	23.8	24.9	25.3	22.7	23.8	23.1	24.2	24.6
4H		24.5	25.6	25.0	26.0	26.4	23.4	24.4	23.8	24.8	25.3
6H		25.8	26.7	26.2	27.2	27.6	23.9	24.9	24.4	25.3	25.8
8H		26.5	27.3	26.9	27.8	28.3	24.1	25.0	24.6	25.4	25.9
12H		27.2	28.1	27.7	28.5	29.0	24.2	25.0	24.7	25.4	25.9
8H 4H		24.9	25.7	25.3	26.2	26.7	23.9	24.7	24.3	25.2	25.7
6H		26.3	27.1	26.8	27.6	28.1	24.6	25.4	25.2	25.9	26.4
8H		27.2	27.8	27.7	28.4	28.9	25.0	25.6	25.5	26.1	26.7
12H		28.2	28.8	28.7	29.3	29.9	25.2	25.7	25.7	26.3	26.8
12H 4H		24.9	25.7	25.4	26.2	26.7	24.0	24.8	24.5	25.3	25.8
6H		26.4	27.1	27.0	27.6	28.2	24.9	25.5	25.4	26.0	26.6
8H		27.4	27.9	27.9	28.5	29.0	25.3	25.9	25.8	26.4	27.0
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 2499 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.2)
Area: 0.07236 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.15V I:0.0881A P:20.033W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2498.68x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	55	43	36	54	43	36	53	42	36	29
0.80	65	53	45	63	52	45	61	51	44	37
1.00	73	61	53	71	60	53	69	62	52	45
1.25	80	68	61	78	68	60	75	66	59	52
1.50	85	74	66	83	73	66	79	71	65	56
2.00	92	82	75	89	81	74	85	78	72	64
2.50	96	87	80	93	85	79	89	82	77	68
3.00	99	91	85	97	90	84	92	86	81	72
4.00	103	97	91	101	95	90	96	91	87	76
5.00	106	100	96	103	98	94	98	94	90	80
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3℃
Operators: Chen Songyu
Test Date: 2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.520m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.15V I:0.0881A P:20.033W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2498.68x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

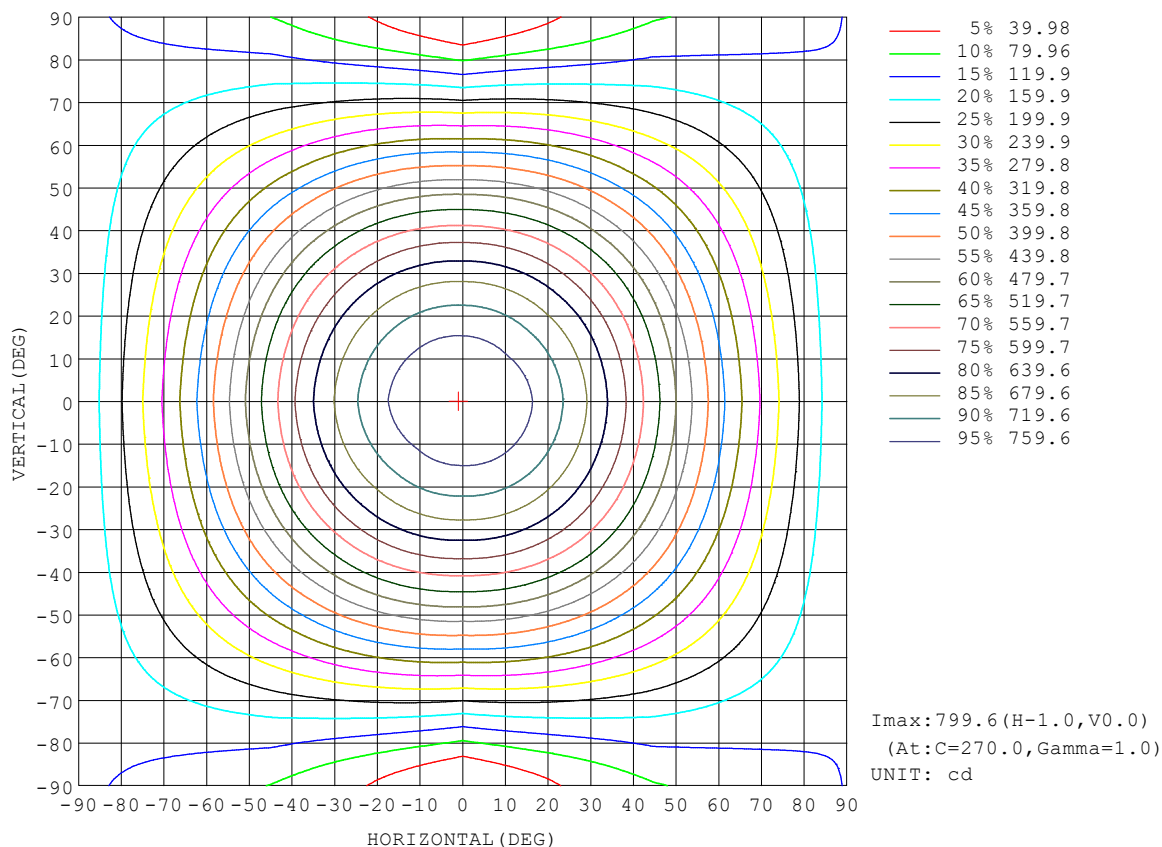


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.15V I:0.0881A P:20.033W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2498.68x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

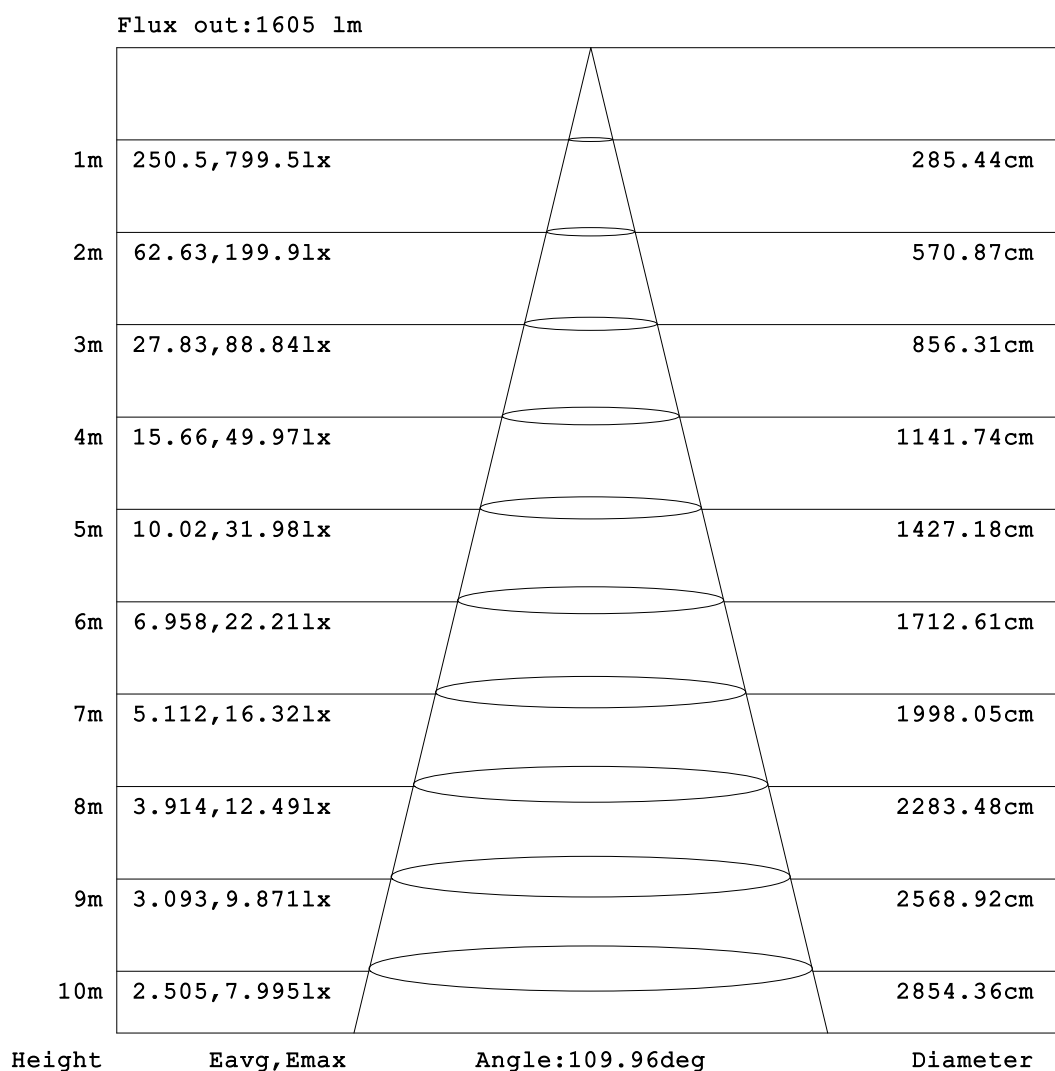


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.15V I:0.0881A P:20.033W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2498.68x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

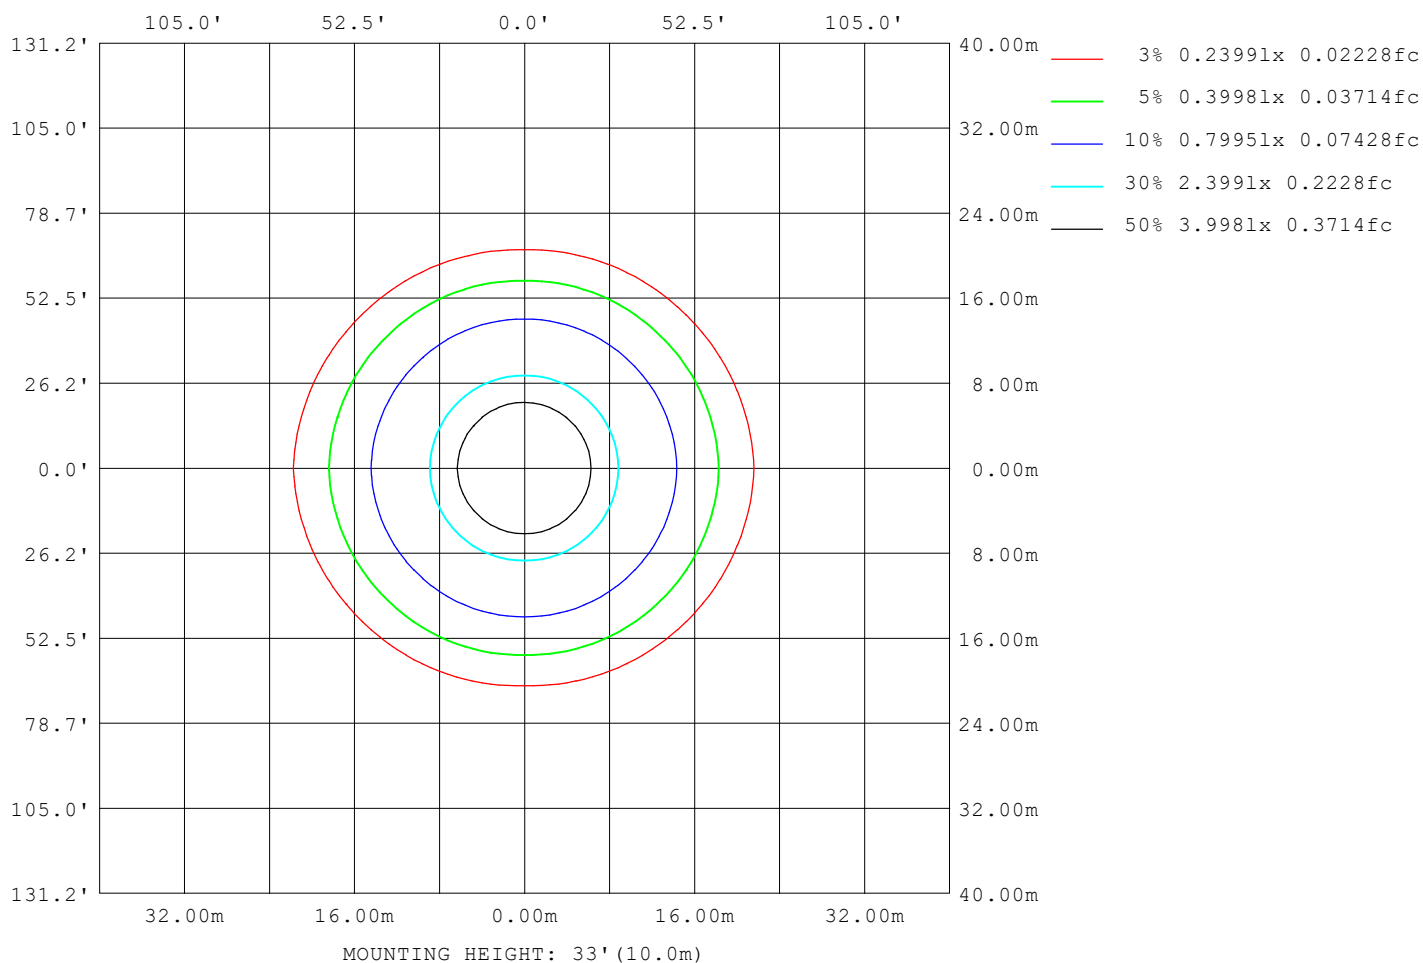

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.15V I:0.0881A P:20.033W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2498.68x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:


AvgL	cd/m2
L_0~180 (65) av	10688
L_0~180 (75) av	12544
L_0~180 (85) av	24883
L_90~270 (65) av	8867
L_90~270 (75) av	7347
L_90~270 (85) av	3889
L_45 (65) av	9664
L_45 (75) av	10258
L_45 (85) av	17453

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

Planar Illuminance Curve

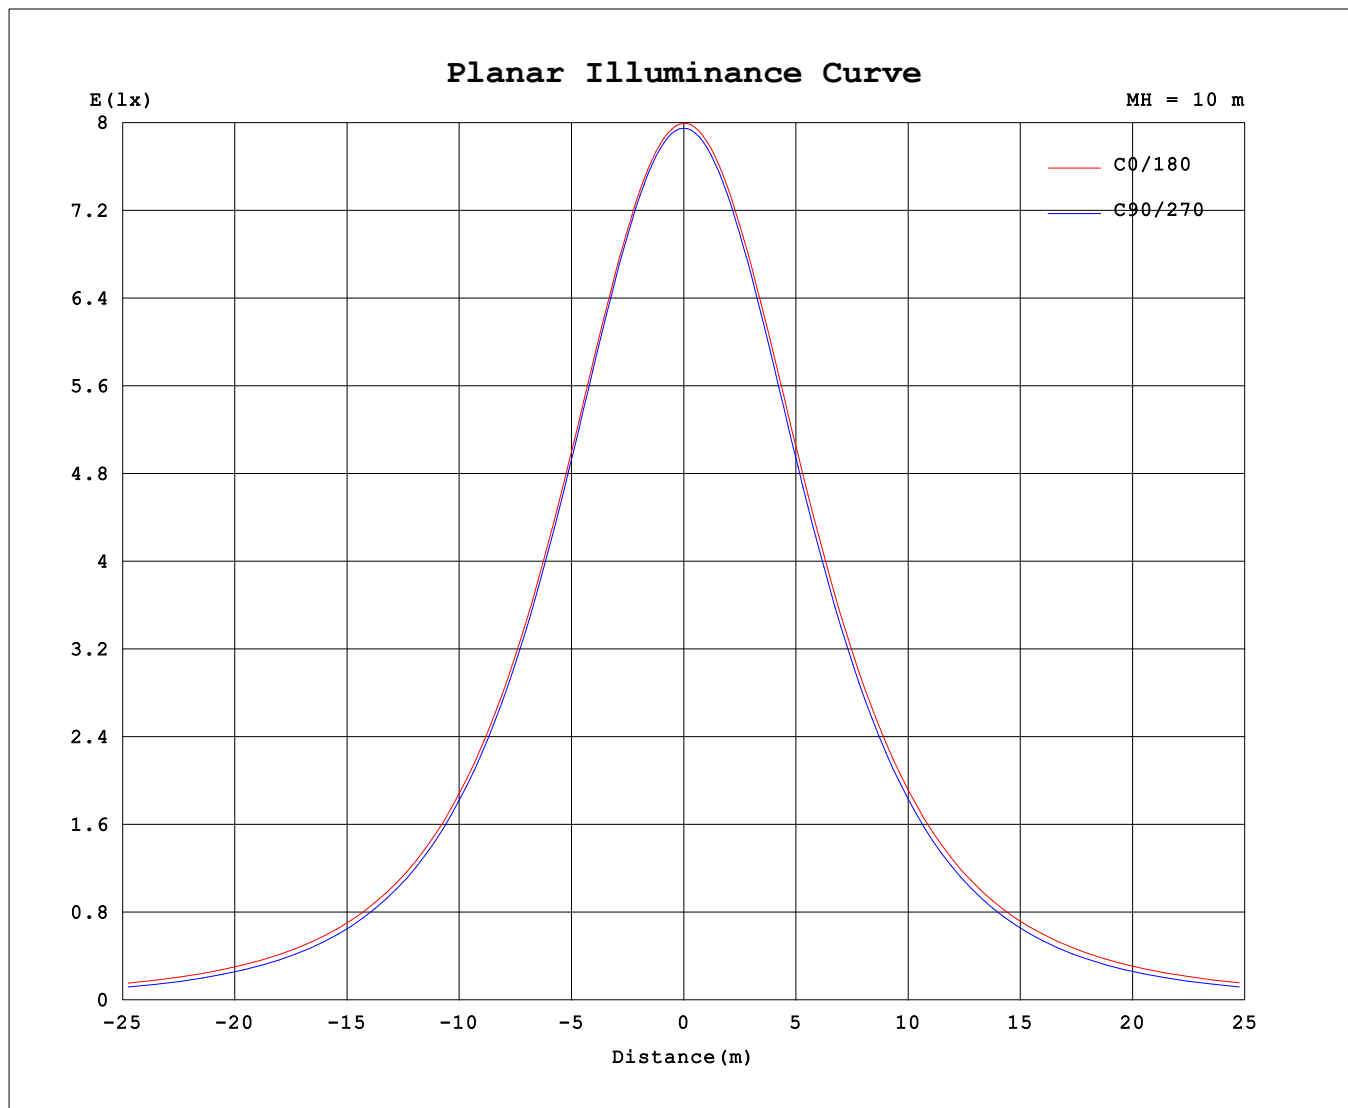

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: Chen Songyu
Test Date: 2025-02-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.520m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.15V I:0.0881A P:20.033W PF:0.9466 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2498.68x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 3000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	796	796	796	796	796	796	796	796										
5	792	792	792	793	793	793	793	792										
10	781	781	780	782	784	782	781	781										
15	762	762	761	764	767	764	762	762										
20	738	736	734	739	743	739	736	737										
25	707	705	701	708	714	708	703	705										
30	670	667	662	670	678	671	665	667										
35	628	624	618	627	637	628	621	624										
40	581	575	569	579	590	580	572	576										
45	530	523	516	527	540	528	519	524										
50	478	467	459	471	487	472	463	468										
55	425	409	398	413	434	413	402	410										
60	373	351	335	354	382	355	339	351										
65	323	294	269	297	331	297	273	294										
70	276	240	202	242	283	243	206	240										
75	231	191	135	193	238	194	140	191										
80	190	147	73.9	149	198	150	77.0	147										
85	153	109	23.3	111	160	112	25.8	109										
90	120	77.0	1.34	79.2	127	79.9	1.49	76.8										
95	91.8	51.4	1.63	53.6	97.7	54.4	1.71	51.3										
100	66.9	32.1	2.07	34.1	72.7	34.7	2.14	31.8										
105	46.4	18.3	2.54	20.1	51.6	20.6	2.60	18.1										
110	30.1	9.80	3.03	11.0	34.6	11.3	3.09	9.70										
115	18.2	5.57	3.53	6.18	21.7	6.36	3.59	5.53										
120	10.3	4.27	4.03	4.39	12.7	4.48	4.08	4.33										
125	6.28	4.67	4.55	4.63	7.55	4.64	4.59	4.72										
130	5.10	5.15	5.07	5.11	5.50	5.11	5.10	5.20										
135	5.50	5.63	5.58	5.59	5.68	5.57	5.59	5.67										
140	5.93	6.09	6.06	6.05	6.12	6.01	6.06	6.12										
145	6.34	6.53	6.50	6.48	6.52	6.43	6.49	6.54										
150	6.74	6.92	6.88	6.89	6.77	6.81	6.87	6.92										
155	7.11	7.28	7.23	7.25	7.13	7.17	7.22	7.28										
160	7.47	7.53	7.48	7.51	7.49	7.50	7.54	7.60										
165	7.79	7.79	7.74	7.79	7.81	7.78	7.81	7.87										
170	8.08	8.03	7.97	8.04	8.14	8.01	8.04	8.10										
175	8.30	8.20	8.13	8.23	8.35	8.15	8.18	8.21										
180	8.40	8.28	8.23	8.31	8.43	8.25	8.26	8.30										

C Range: 0 - 360DEG

C Interval: 45.0DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Chen Songyu

Test Date:2025-02-25

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:9.520m [K=1.0000]

Remarks: