


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.70V I:0.1418A P:29.951W PF:0.9158 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3973.04x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 132.65 lm/W			
MODEL	SLB-40W-CC	I _{max} (cd)	1281	S/MH(C0/180)	1.28
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	3973.0	η UP, DN(C0-180)	1.9, 47.6
NOMINAL FLUX(lm)	3973.04	CIE CLASS	DIRECT	η UP, DN(C180-360)	2.2, 48.2
LAMPS INSIDE	1	η up(%)	4.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230	η down(%)	95.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

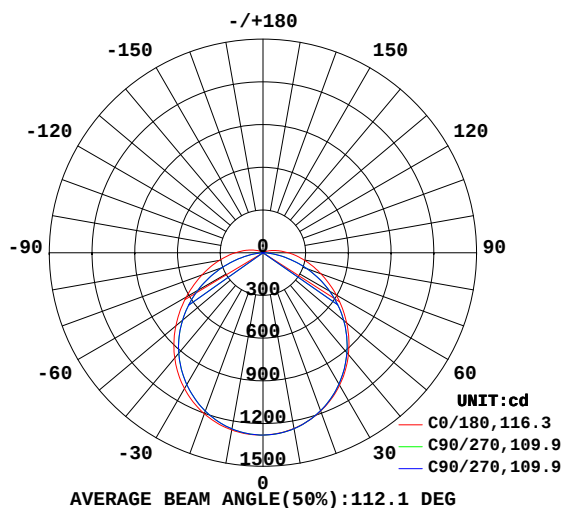

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

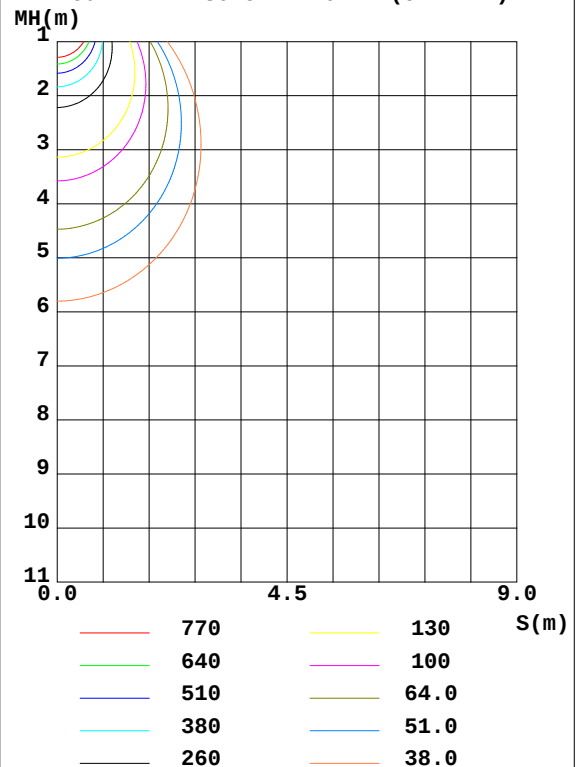

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: RD
Test Date: 2023-10-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270				γ	Φ zone	Φ total	%lum, lamp
10	1253	1255	1264	1256				0- 10	121.1	121.1	3.05, 3.05
20	1183	1181	1204	1184				10- 20	346.5	467.6	11.8, 11.8
30	1075	1066	1103	1070				20- 30	524.5	992.0	25, 25
40	933.4	916.5	964.9	920.8				30- 40	631.8	1624	40.9, 40.9
50	767.3	739.9	799.4	737.7				40- 50	655.9	2280	57.4, 57.4
60	595.1	541.8	622.3	529.3				50- 60	597.0	2877	72.4, 72.4
70	433.0	328.4	455.6	306.6				60- 70	471.4	3348	84.3, 84.3
80	292.4	122.6	310.4	96.51				70- 80	307.0	3655	92, 92
90	178.2	1.938	195.2	2.094				80- 90	153.8	3809	95.9, 95.9
100	93.04	2.521	108.6	2.991				90-100	78.18	3887	97.8, 97.8
110	39.04	3.999	50.32	4.520				100-110	39.11	3926	98.8, 98.8
120	14.21	5.561	19.57	6.092				110-120	16.83	3943	99.2, 99.2
130	7.536	7.166	8.421	7.703				120-130	8.225	3951	99.5, 99.5
140	8.825	8.767	9.041	9.163				130-140	6.372	3958	99.6, 99.6
150	10.04	10.12	10.26	10.42				140-150	6.011	3964	99.8, 99.8
160	11.26	11.24	11.38	11.37				150-160	4.973	3969	99.9, 99.9
170	12.22	12.03	12.26	12.07				160-170	3.320	3972	100, 100
180	12.64	12.35	12.64	12.36				170-180	1.175	3973	100, 100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

Conical surface Flux(90deg): 1954.2 lm

%lum = 49.2%

%lamp = 49.2%

Conical surface Flux(120deg): 2876.7 lm

%lum = 72.4%

%lamp = 72.4%

0 - 45 DEG Zonal Flux:1954.2 %lum: 49.2%

0 - 60 DEG Zonal Flux:2876.7 %lum: 72.4%

All measured values may vary less than 35 %

from the average measured value in the 0 to 130 deg. zone: 16.0%

All measured values in the 0 to 130 deg. zone


may vary less than 50% from the average value of itself: 23.5%

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:RD
Test Date:2023-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.70V I:0.1418A P:29.951W PF:0.9158 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3973.04x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:

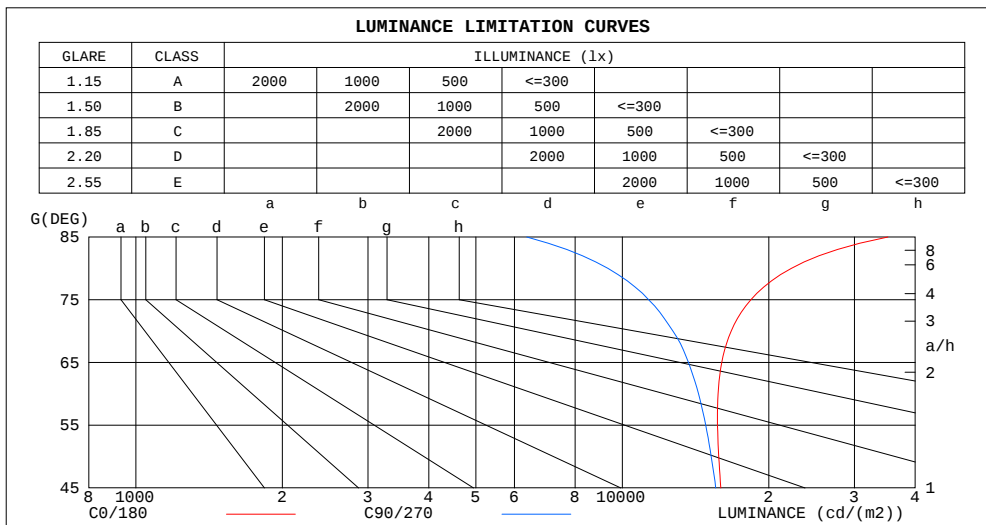

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	35154	6360
80	22258	9343
75	18383	11328
70	16738	12708
65	16012	13677
60	15734	14342
55	15690	14839
50	15780	15234
45	15935	15559


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:RD
Test Date:2023-10-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.70V I:0.1418A P:29.951W PF:0.9158 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3973.04x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.03	1.03	1.03	.98	.98	.98	.96
1.0	1.02	.97	.93	.99	.95	.91	.94	.90	.87	.89	.86	.84	.85	.83	.81	.78
2.0	.88	.81	.75	.86	.79	.74	.82	.76	.71	.78	.73	.69	.74	.70	.67	.64
3.0	.77	.69	.62	.75	.67	.61	.72	.65	.59	.68	.63	.58	.65	.60	.56	.54
4.0	.68	.59	.52	.67	.58	.52	.64	.56	.50	.61	.54	.49	.58	.53	.48	.46
5.0	.61	.52	.45	.59	.51	.44	.57	.49	.44	.54	.48	.43	.52	.46	.42	.40
6.0	.55	.46	.39	.54	.45	.39	.51	.44	.38	.49	.42	.37	.47	.41	.37	.35
7.0	.50	.41	.34	.49	.40	.34	.47	.39	.34	.45	.38	.33	.43	.37	.33	.30
8.0	.45	.37	.31	.44	.36	.30	.43	.35	.30	.41	.34	.30	.40	.34	.29	.27
9.0	.41	.33	.28	.41	.33	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.24
10.0	.38	.30	.25	.38	.30	.25	.36	.29	.24	.35	.29	.24	.34	.28	.24	.22

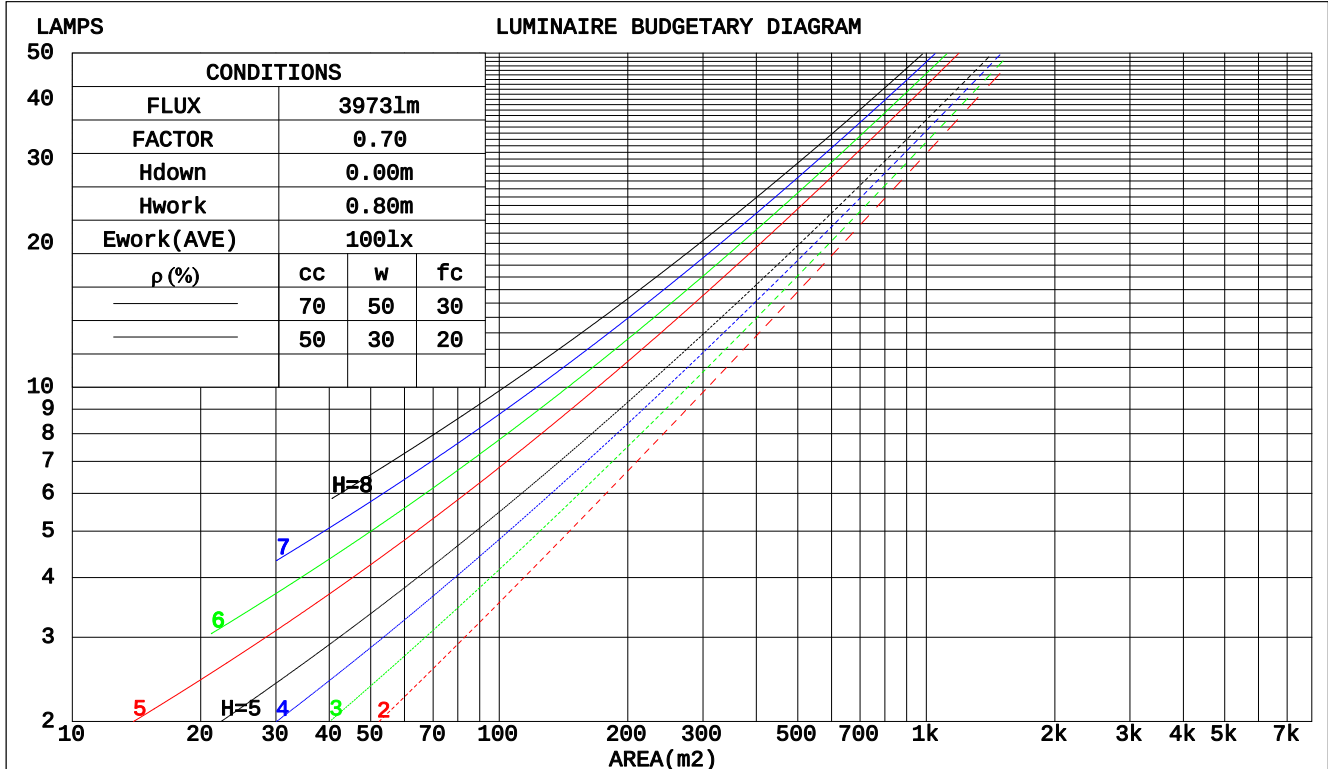

WEC AND CCEC

Test:U:230.70V I:0.1418A P:29.951W PF:0.9158 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3973.04x1 lm					
NAME: SLB-40W-CC			TYPE: 30W		WEIGHT:
SPEC.: 4000K			DIM.:		SERIAL No.: UP-IES4-R&D
MFR.:			SUR.: 0.0756		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.334	.190	.060	.326	.186	.059	.310	.178	.057	.296	.170	.055	.282	.164	.053		
2.0	.305	.167	.051	.297	.164	.050	.283	.157	.049	.270	.152	.047	.258	.146	.046		
3.0	.278	.148	.044	.271	.145	.044	.259	.140	.043	.247	.135	.042	.237	.131	.041		
4.0	.254	.132	.039	.248	.130	.038	.237	.126	.038	.227	.122	.037	.217	.118	.036		
5.0	.234	.119	.035	.229	.117	.034	.219	.114	.034	.209	.110	.033	.201	.107	.032		
6.0	.216	.108	.031	.211	.107	.031	.202	.104	.030	.194	.101	.030	.186	.098	.029		
7.0	.200	.099	.028	.196	.098	.028	.188	.095	.027	.181	.093	.027	.174	.090	.026		
8.0	.187	.091	.026	.183	.090	.025	.176	.088	.025	.169	.086	.025	.162	.083	.024		
9.0	.175	.085	.024	.171	.084	.023	.165	.081	.023	.159	.079	.023	.153	.078	.022		
10.0	.164	.079	.022	.161	.078	.022	.155	.076	.021	.149	.074	.021	.144	.072	.021		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.222	.222	.222	.190	.190	.190	.129	.129	.129	.074	.074	.074	.024	.024	.024	
1.0	.214	.188	.164	.183	.161	.141	.125	.111	.098	.072	.064	.057	.023	.021	.018	
2.0	.206	.164	.128	.176	.141	.111	.121	.098	.077	.070	.057	.045	.022	.018	.015	
3.0	.198	.146	.105	.170	.126	.091	.117	.088	.064	.067	.051	.038	.022	.017	.012	
4.0	.190	.133	.090	.163	.115	.078	.112	.080	.055	.065	.047	.033	.021	.015	.011	
5.0	.183	.123	.079	.157	.107	.069	.108	.074	.049	.063	.044	.029	.020	.014	.009	
6.0	.176	.115	.071	.151	.099	.062	.104	.070	.044	.060	.041	.026	.019	.013	.009	
7.0	.169	.108	.066	.145	.094	.057	.100	.066	.040	.058	.039	.024	.019	.013	.008	
8.0	.162	.102	.061	.140	.089	.053	.097	.062	.038	.056	.037	.023	.018	.012	.007	
9.0	.156	.097	.058	.134	.084	.050	.093	.059	.036	.054	.035	.021	.018	.012	.007	
10.0	.150	.093	.055	.129	.081	.048	.090	.057	.034	.052	.034	.020	.017	.011	.007	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:RD
 Test Date:2023-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.70V I:0.1418A P:29.951W PF:0.9158 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3973.04x1 lm										
NAME: SLB-40W-CC					TYPE: 30W			WEIGHT:		
SPEC.: 4000K					DIM.:			SERIAL No.: UP-IES4-R&D		
MFR.:					SUR.: 0.0756			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.2	23.7	22.5	23.9	24.2	21.9	23.4	22.2	23.6	23.9
3H	24.0	25.4	24.4	25.7	26.0	23.3	24.7	23.7	25.0	25.4
4H	25.0	26.3	25.4	26.6	27.0	23.9	25.2	24.3	25.5	25.9
6H	26.0	27.2	26.4	27.6	27.9	24.3	25.5	24.7	25.9	26.2
8H	26.5	27.7	26.9	28.1	28.5	24.4	25.6	24.8	25.9	26.3
12H	27.1	28.3	27.5	28.6	29.0	24.4	25.5	24.8	25.9	26.3
4H 2H	22.8	24.1	23.1	24.4	24.7	22.5	23.8	22.9	24.2	24.5
3H	24.8	26.0	25.2	26.4	26.7	24.2	25.4	24.6	25.7	26.1
4H	25.9	27.0	26.4	27.4	27.8	24.9	26.0	25.4	26.4	26.8
6H	27.1	28.0	27.6	28.5	28.9	25.4	26.4	25.9	26.8	27.3
8H	27.7	28.6	28.2	29.0	29.5	25.6	26.5	26.1	26.9	27.4
12H	28.5	29.3	28.9	29.7	30.2	25.7	26.5	26.2	26.9	27.4
8H 4H	26.2	27.1	26.7	27.5	28.0	25.4	26.2	25.8	26.7	27.1
6H	27.6	28.3	28.1	28.8	29.3	26.1	26.8	26.6	27.3	27.8
8H	28.4	29.0	28.9	29.5	30.1	26.3	27.0	26.9	27.5	28.0
12H	29.3	29.9	29.9	30.4	31.0	26.5	27.1	27.1	27.6	28.2
12H 4H	26.2	27.0	26.7	27.5	28.0	25.4	26.2	25.9	26.7	27.2
6H	27.7	28.3	28.2	28.8	29.4	26.2	26.9	26.8	27.4	27.9
8H	28.5	29.1	29.1	29.6	30.2	26.6	27.2	27.1	27.7	28.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 3973 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 4.8$)
Area: 0.0756 m²

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:RD
Test Date:2023-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.70V I:0.1418A P:29.951W PF:0.9158 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3973.04x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	55	43	36	54	43	36	53	43	36	30
0.80	65	53	45	64	53	45	62	52	45	38
1.00	73	62	54	72	61	54	69	62	53	46
1.25	80	69	62	79	68	61	76	67	60	52
1.50	85	75	67	83	74	67	80	72	65	57
2.00	92	83	76	90	81	75	86	79	73	64
2.50	96	88	81	94	86	80	89	83	78	69
3.00	100	92	86	97	90	85	92	87	82	73
4.00	104	97	92	101	95	90	96	91	87	77
5.00	106	101	96	103	99	94	98	94	91	80
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:RD
 Test Date:2023-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.70V I:0.1418A P:29.951W PF:0.9158 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3973.04x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:

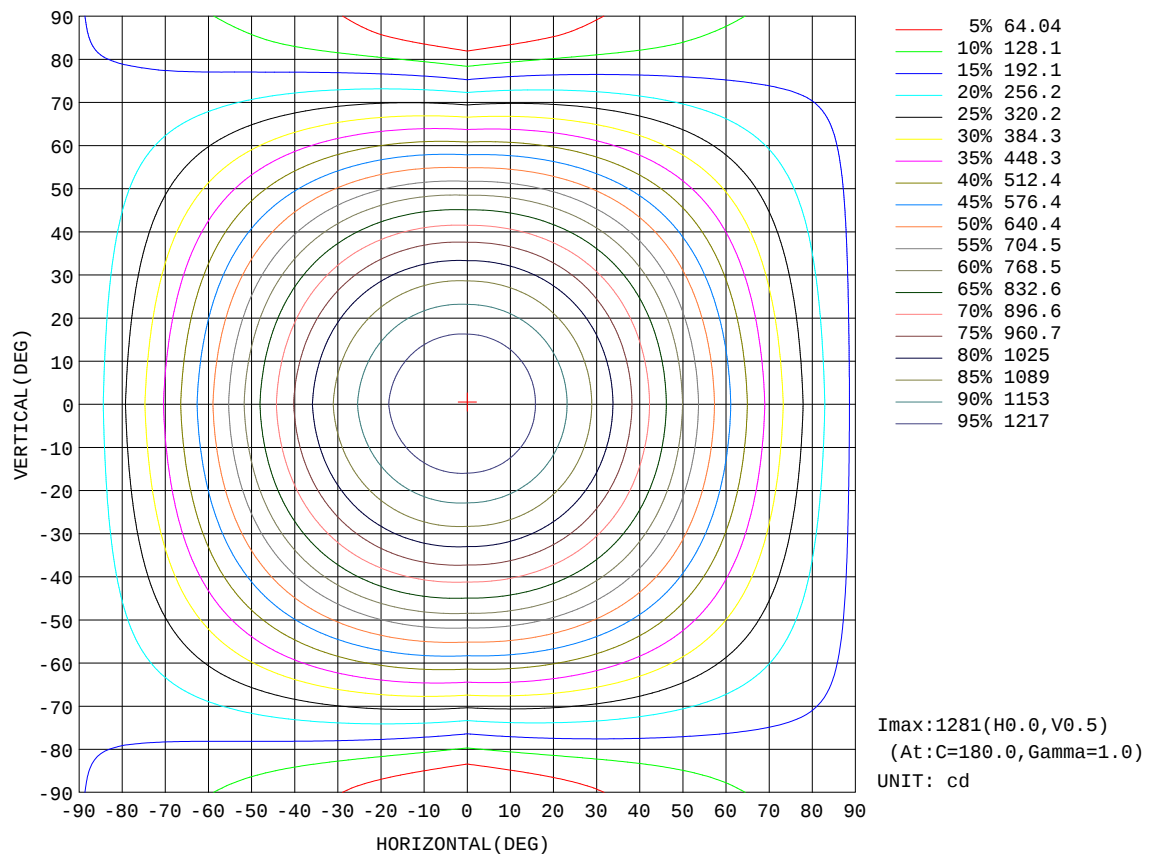


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:RD
Test Date:2023-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.70V I:0.1418A P:29.951W PF:0.9158 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3973.04x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:

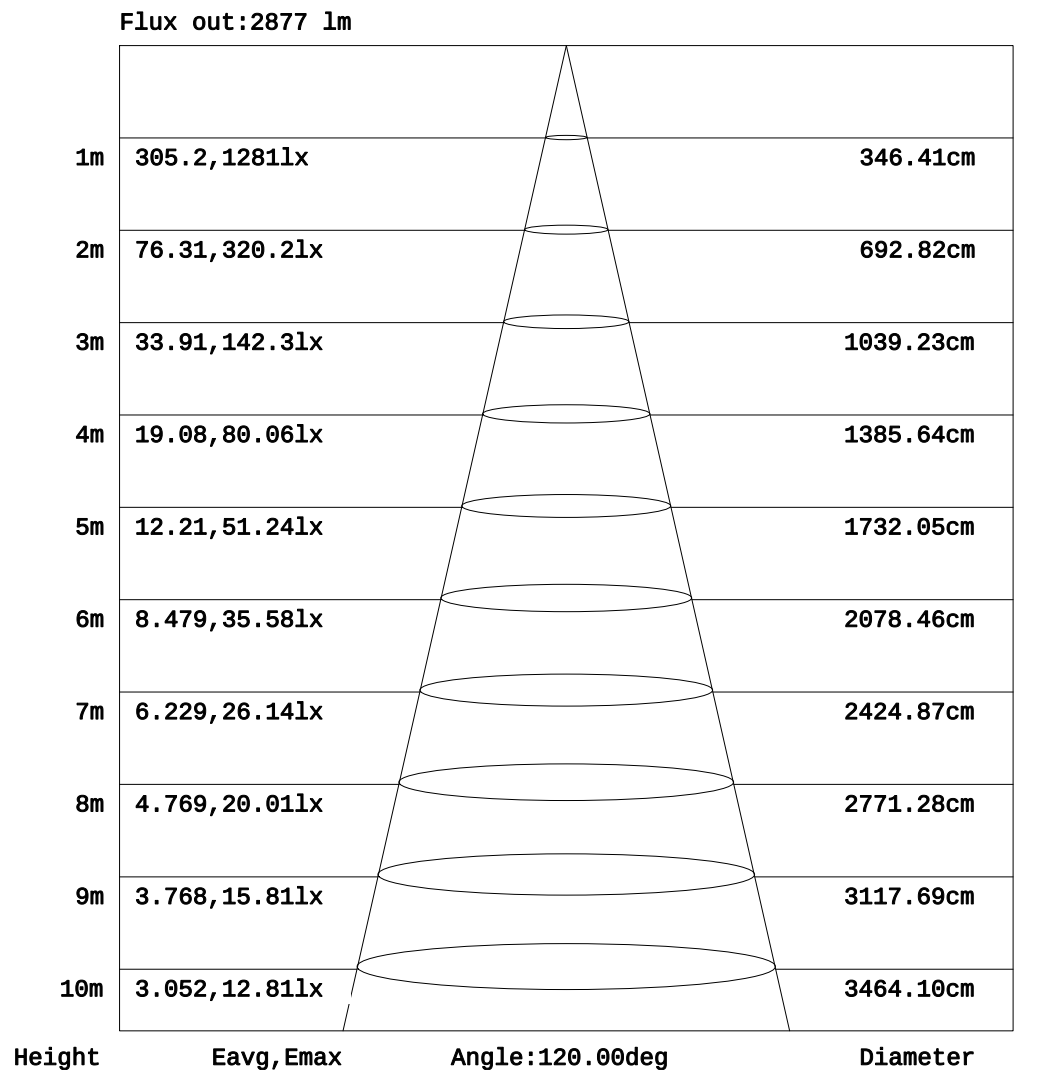


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:RD
Test Date:2023-10-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.70V I:0.1418A P:29.951W PF:0.9158 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3973.04x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:

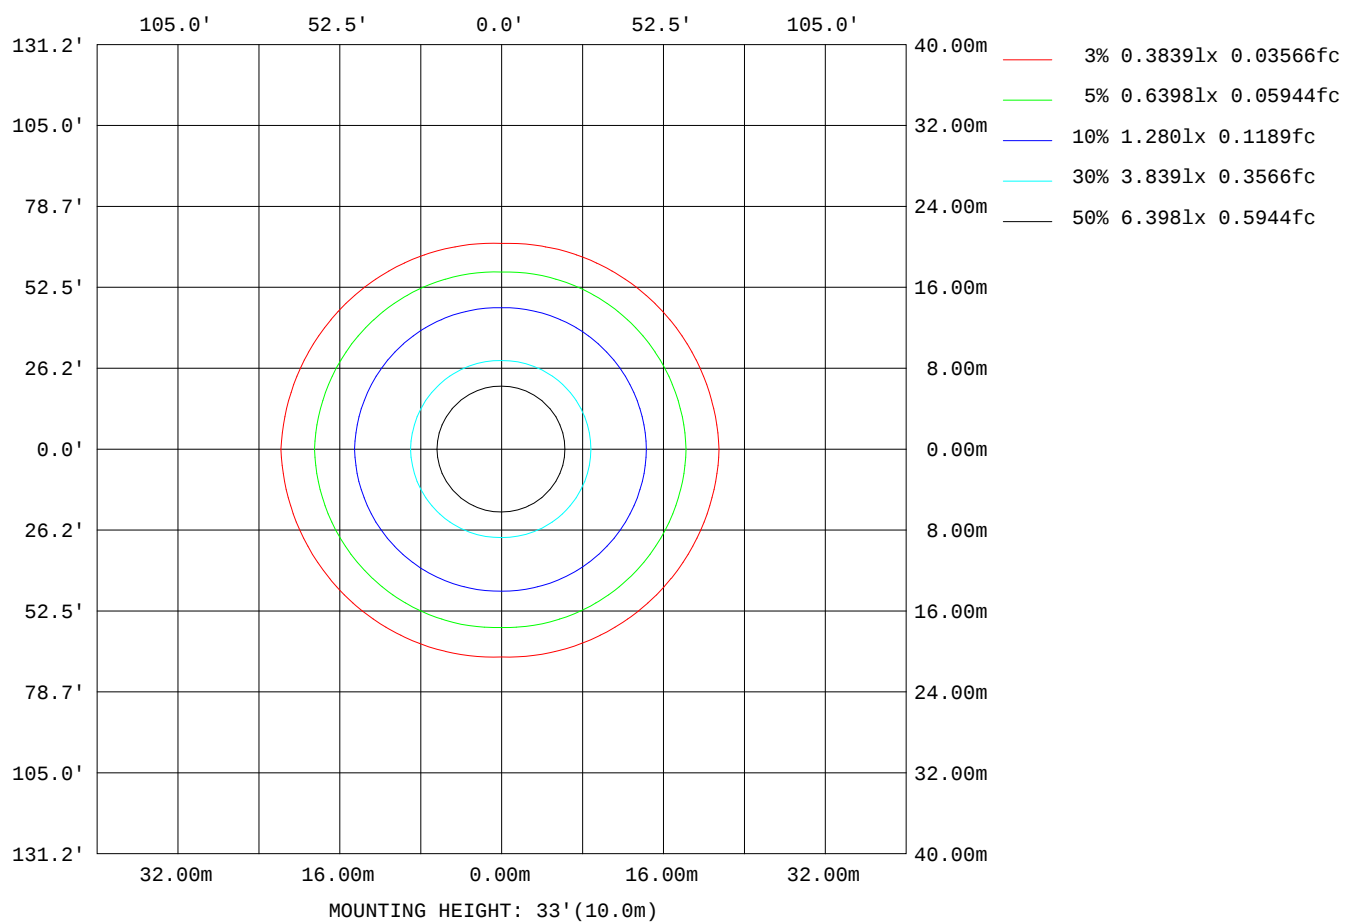

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: RD
Test Date: 2023-10-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.70V I:0.1418A P:29.951W PF:0.9158 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3973.04x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	16408
L_0~180(75)av	18927
L_0~180(85)av	36501
L_90~270(65)av	13387
L_90~270(75)av	10703
L_90~270(85)av	4870
L_45(65)av	14543
L_45(75)av	13818
L_45(85)av	16807

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:RD
Test Date:2023-10-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

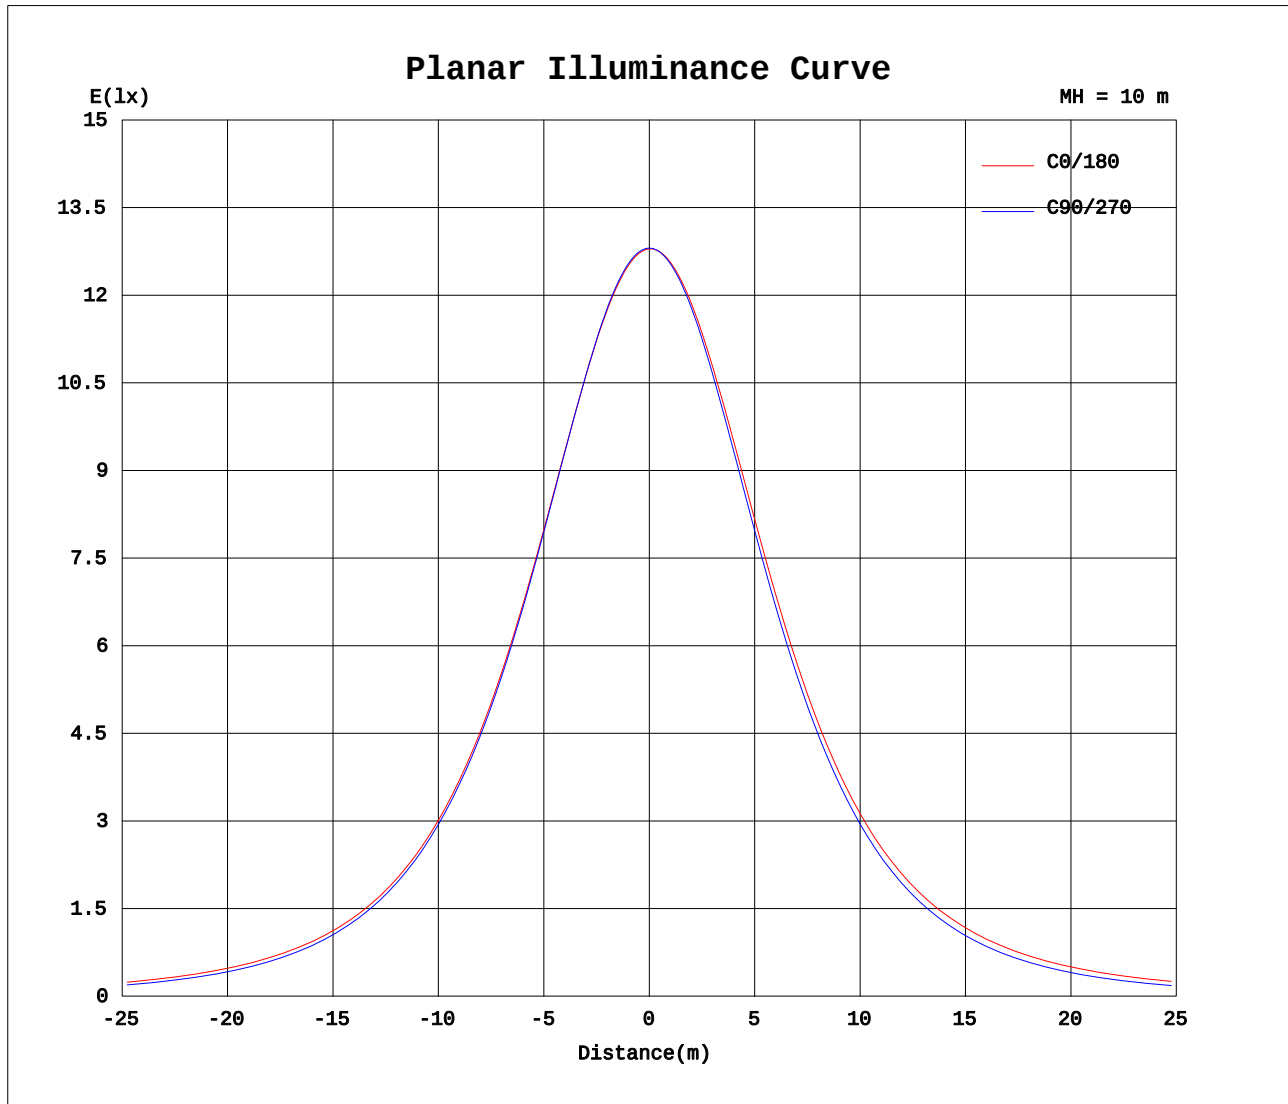

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: RD
Test Date: 2023-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.70V I:0.1418A P:29.951W PF:0.9158 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3973.04x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:

Table--1

UNIT: cd

C(°)	0	90	180	270															
γ (°)	0	1280	1280	1280	1280														
0	1280	1280	1280	1280															
5	1272	1274	1278	1274															
10	1253	1255	1264	1256															
15	1223	1223	1239	1226															
20	1183	1181	1204	1184															
25	1134	1129	1158	1132															
30	1075	1066	1103	1070															
35	1008	995	1038	999															
40	933	917	965	921															
45	852	831	885	833															
50	767	740	799	738															
55	681	643	711	636															
60	595	542	622	529															
65	512	437	537	419															
70	433	328	456	307															
75	360	222	381	197															
80	292	123	310	96.5															
85	232	41.9	249	22.3															
90	178	1.94	195	2.09															
95	131	1.85	148	2.28															
100	93.0	2.52	109	2.99															
105	62.1	3.25	75.8	3.74															
110	39.0	4.00	50.3	4.52															
115	23.3	4.77	32.0	5.29															
120	14.2	5.56	19.6	6.09															
125	10.1	6.35	12.5	6.89															
130	7.54	7.17	8.42	7.70															
135	8.10	7.97	8.41	8.45															
140	8.82	8.77	9.04	9.16															
145	9.42	9.49	9.70	9.83															
150	10.0	10.1	10.3	10.4															
155	10.7	10.7	10.8	10.9															
160	11.3	11.2	11.4	11.4															
165	11.8	11.7	11.9	11.7															
170	12.2	12.0	12.3	12.1															
175	12.5	12.3	12.5	12.3															
180	12.6	12.3	12.6	12.4															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:RD
 Test Date:2023-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks: