


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.26V I:0.1558A P:36.591W PF:0.9777 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4779.03x1 lm		
Name: SLB-40W-CC	Type: 40W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 130.60 lm/W			
MODEL	SLB-40W-CC	Imax (cd)	1524	S/MH(C0/180)	1.25
NOMINAL POWER(W)	40W	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	4779.0	η UP,DN(C0-180)	2.1,47.7
NOMINAL FLUX(lm)	4779.03	CIE CLASS	DIRECT	η UP,DN(C180-360)	2.2,48.0
LAMPS INSIDE	1	η up (%)	4.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	240	η down (%)	95.7	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

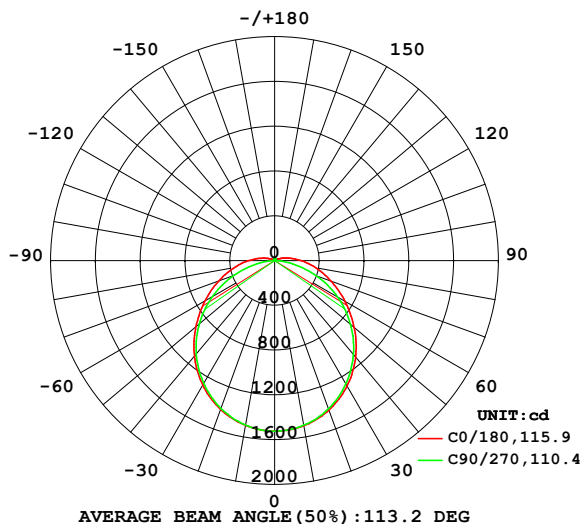

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

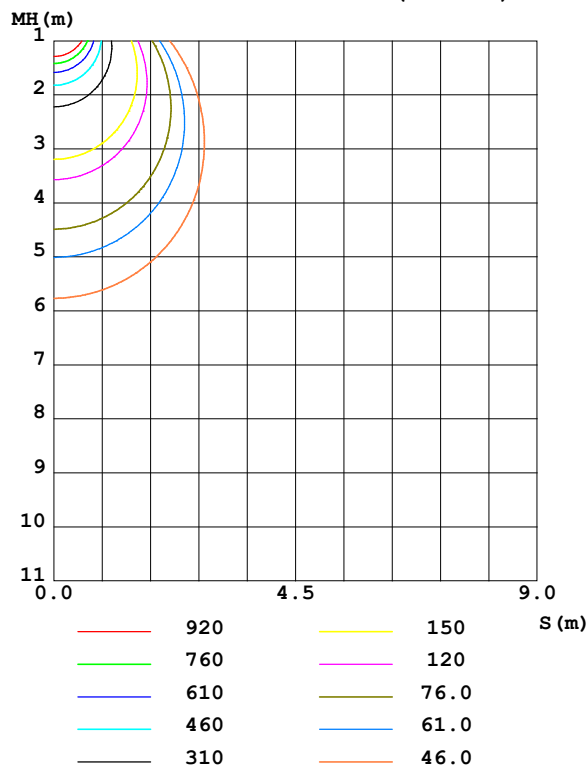

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1495	1495	1493	1495	1498	1495	1494	1493	0- 10	144.1	144.1	3.01,3.01
20	1414	1411	1405	1412	1421	1414	1409	1410	10- 20	412.0	556.0	11.6,11.6
30	1285	1278	1268	1281	1295	1282	1273	1279	20- 30	622.9	1179	24.7,24.7
40	1115	1104	1089	1106	1127	1108	1096	1105	30- 40	749.2	1928	40.3,40.3
50	917.6	897.9	877.9	898.8	928.5	900.4	885.9	898.6	40- 50	776.5	2705	56.6,56.6
60	717.2	674.3	641.5	674.1	725.7	676.1	649.4	675.7	50- 60	707.2	3412	71.4,71.4
70	530.0	462.0	387.1	460.4	536.9	462.6	395.2	462.7	60- 70	563.9	3976	83.2,83.2
80	366.2	282.8	140.9	282.0	373.4	283.8	147.8	283.0	70- 80	383.5	4359	91.2,91.2
90	231.6	148.1	2.509	149.4	239.2	150.5	2.794	147.8	80- 90	212.8	4572	95.7,95.7
100	128.2	61.36	3.957	63.68	136.1	64.72	4.057	61.20	90-100	106.2	4678	97.9,97.9
110	57.50	18.58	5.793	20.41	63.79	20.88	5.886	18.46	100-110	46.39	4725	98.9,98.9
120	19.49	8.070	7.708	8.272	23.16	8.419	7.798	8.201	110-120	17.31	4742	99.2,99.2
130	9.687	9.810	9.698	9.776	10.32	9.798	9.734	9.900	120-130	9.076	4751	99.4,99.4
140	11.31	11.59	11.58	11.55	11.69	11.51	11.56	11.66	130-140	8.260	4759	99.6,99.6
150	12.85	13.19	13.16	13.13	12.91	13.04	13.09	13.21	140-150	7.735	4767	99.7,99.7
160	14.29	14.34	14.32	14.33	14.29	14.35	14.37	14.52	150-160	6.341	4773	99.9,99.9
170	15.48	15.29	15.24	15.31	15.53	15.33	15.32	15.47	160-170	4.203	4778	100,100
180	16.08	15.80	15.73	15.87	16.11	15.76	15.76	15.84	170-180	1.488	4779	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2319.3 lm

%lum = 48.5%

%lamp = 48.5%

Conical surface Flux(120deg): 3411.9 lm

%lum = 71.4%


%lamp = 71.4%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Chen Songyu
 Test Date:2025-02-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.520m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.26V I:0.1558A P:36.591W PF:0.9777 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4779.03x1 lm		
Name: SLB-40W-CC	Type: 40W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

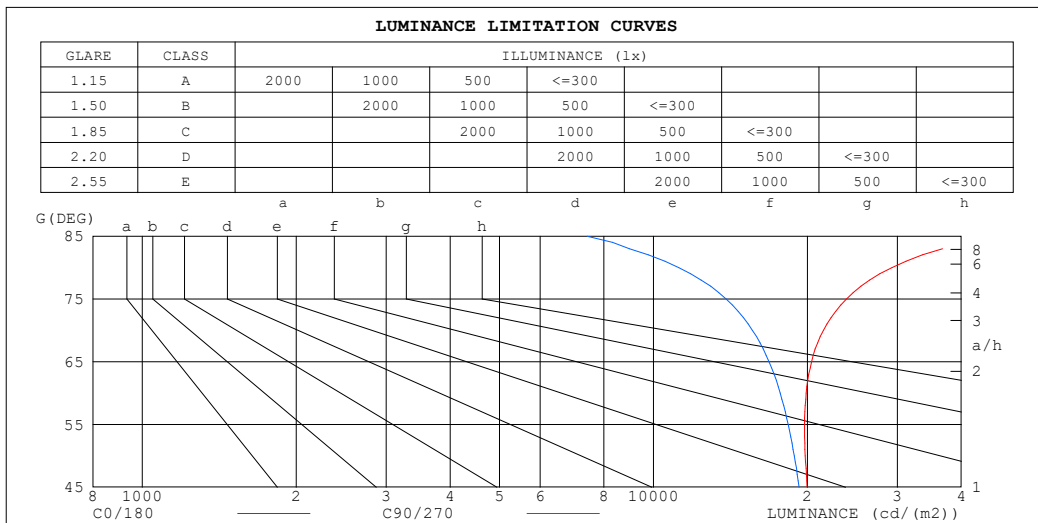

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	46954	7415
80	29255	11200
75	23857	13864
70	21500	15618
65	20393	16834
60	19900	17705
55	19759	18349
50	19805	18848
45	19983	19274


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Chen Songyu
Test Date: 2025-02-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.520m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.26V I:0.1558A P:36.591W PF:0.9777 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4779.03x1 lm		
Name: SLB-40W-CC	Type: 40W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

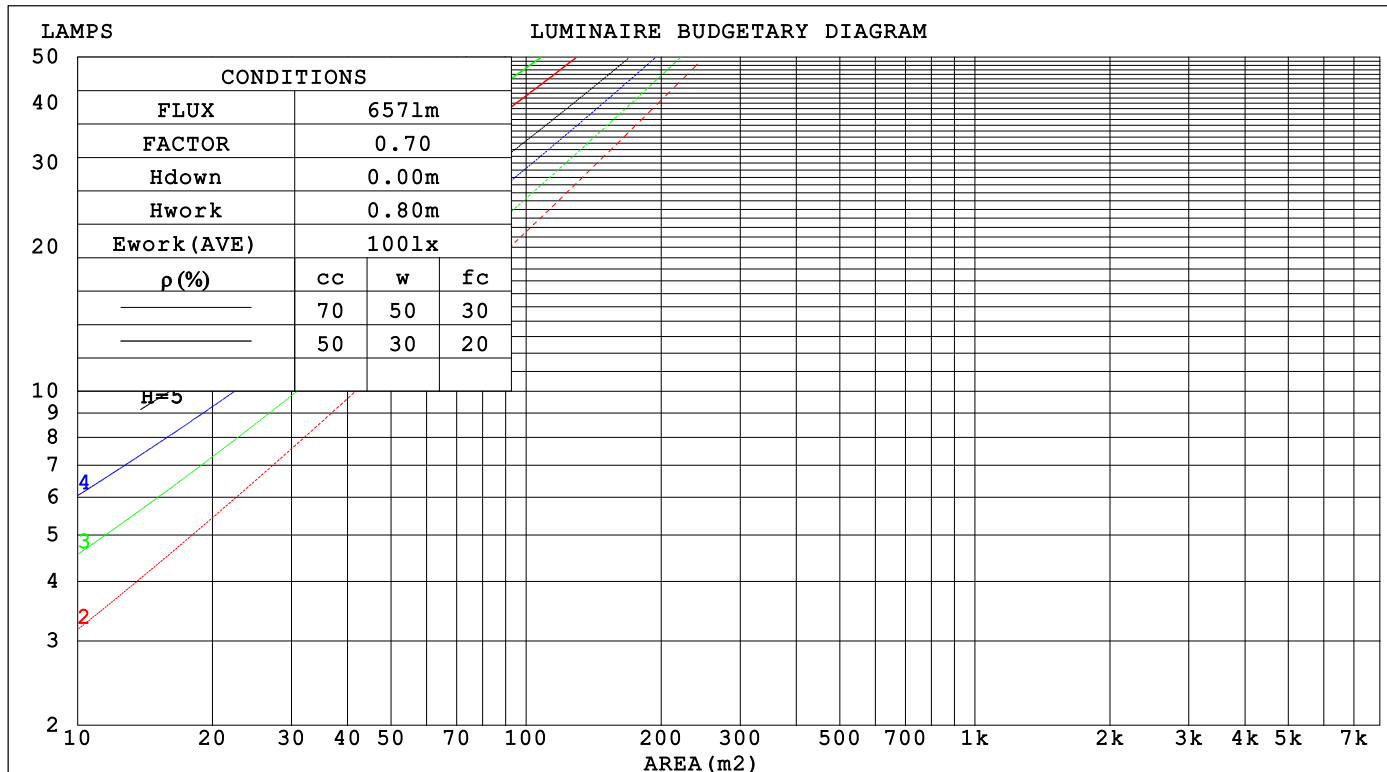

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.26V I:0.1558A P:36.591W PF:0.9777 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4779.03x1 lm		
Name: SLB-40W-CC	Type: 40W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.341	.194	.062	.333	.190	.060	.317	.182	.058	.303	.175	.056	.289	.168	.054		
2.0	.309	.169	.052	.301	.166	.051	.287	.160	.050	.274	.154	.048	.262	.148	.047		
3.0	.280	.149	.045	.274	.147	.044	.261	.142	.043	.249	.137	.042	.239	.132	.041		
4.0	.256	.133	.039	.250	.131	.039	.239	.127	.038	.228	.123	.037	.219	.119	.036		
5.0	.235	.120	.035	.230	.118	.034	.220	.114	.034	.210	.111	.033	.201	.108	.032		
6.0	.217	.109	.031	.212	.107	.031	.203	.104	.030	.195	.101	.030	.187	.098	.029		
7.0	.201	.099	.028	.197	.098	.028	.189	.095	.027	.181	.093	.027	.174	.090	.027		
8.0	.187	.092	.026	.184	.090	.026	.176	.088	.025	.169	.086	.025	.163	.084	.024		
9.0	.175	.085	.024	.172	.084	.023	.165	.082	.023	.159	.080	.023	.153	.078	.022		
10.0	.165	.079	.022	.161	.078	.022	.155	.076	.021	.150	.074	.021	.144	.072	.021		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.223	.223	.223	.191	.191	.191	.130	.130	.130	.075	.075	.075	.024	.024	.024		
1.0	.216	.189	.165	.185	.162	.142	.126	.112	.098	.073	.065	.057	.023	.021	.018		
2.0	.208	.165	.129	.178	.142	.112	.122	.098	.078	.070	.057	.046	.023	.019	.015		
3.0	.200	.148	.106	.172	.128	.092	.118	.089	.065	.068	.052	.038	.022	.017	.013		
4.0	.192	.135	.091	.165	.117	.079	.114	.081	.056	.066	.048	.033	.021	.015	.011		
5.0	.185	.125	.080	.159	.108	.070	.109	.075	.049	.063	.044	.029	.020	.014	.010		
6.0	.177	.116	.073	.152	.101	.063	.105	.071	.045	.061	.042	.027	.020	.014	.009		
7.0	.170	.110	.067	.147	.095	.058	.101	.067	.041	.059	.039	.025	.019	.013	.008		
8.0	.164	.104	.063	.141	.090	.055	.098	.063	.039	.057	.037	.023	.018	.012	.008		
9.0	.158	.099	.059	.136	.086	.052	.094	.060	.037	.055	.036	.022	.018	.012	.007		
10.0	.152	.095	.057	.131	.082	.049	.091	.058	.035	.053	.034	.021	.017	.011	.007		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.26V I:0.1558A P:36.591W PF:0.9777 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4779.03x1 lm										
Name: SLB-40W-CC						Type: 40W			Weight:	
SPEC.: 4000K						DIM.:			Instrument No.: HUP-IES-B3	
MFR.: EVERFINE						SUR.: 1.080*0.067			shielding angle:	
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.9	24.4	23.3	24.7	25.0	22.6	24.0	22.9	24.3	24.6
3H	24.9	26.2	25.2	26.6	26.9	24.0	25.4	24.4	25.7	26.1
4H	25.9	27.2	26.2	27.5	27.9	24.6	25.9	25.0	26.2	26.6
6H	26.9	28.2	27.3	28.5	28.9	25.0	26.2	25.4	26.6	26.9
8H	27.5	28.7	27.9	29.1	29.5	25.1	26.3	25.5	26.6	27.0
12H	28.2	29.3	28.6	29.7	30.1	25.1	26.2	25.5	26.6	27.0
4H 2H	23.5	24.8	23.9	25.2	25.5	23.2	24.5	23.6	24.9	25.2
3H	25.7	26.8	26.1	27.2	27.6	24.9	26.1	25.4	26.5	26.9
4H	26.8	27.9	27.3	28.3	28.7	25.7	26.7	26.1	27.1	27.6
6H	28.1	29.0	28.5	29.4	29.9	26.2	27.1	26.7	27.6	28.0
8H	28.8	29.6	29.2	30.1	30.6	26.4	27.2	26.8	27.7	28.2
12H	29.5	30.3	30.0	30.8	31.3	26.4	27.3	26.9	27.7	28.2
8H 4H	27.1	28.0	27.6	28.5	29.0	26.1	27.0	26.6	27.5	28.0
6H	28.6	29.4	29.1	29.8	30.4	26.9	27.7	27.4	28.2	28.7
8H	29.5	30.1	30.0	30.6	31.2	27.2	27.9	27.8	28.4	28.9
12H	30.5	31.0	31.0	31.6	32.1	27.5	28.0	28.0	28.5	29.1
12H 4H	27.2	28.0	27.7	28.4	28.9	26.3	27.1	26.7	27.5	28.0
6H	28.7	29.4	29.3	29.9	30.4	27.2	27.8	27.7	28.3	28.9
8H	29.7	30.2	30.2	30.8	31.3	27.6	28.1	28.1	28.7	29.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 4779 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 5.4$)
Area: 0.07236 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.26V I:0.1558A P:36.591W PF:0.9777 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4779.03x1 lm		
Name: SLB-40W-CC	Type: 40W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	55	43	36	54	43	36	53	42	36	29
0.80	65	53	45	64	52	45	62	51	44	37
1.00	73	61	53	71	60	53	69	62	52	45
1.25	80	69	61	78	68	60	75	66	59	52
1.50	85	74	66	83	73	66	79	71	65	56
2.00	92	82	75	89	81	74	86	78	72	64
2.50	96	87	80	93	85	79	89	82	77	68
3.00	99	91	85	97	90	84	92	86	81	72
4.00	103	97	91	101	95	90	96	91	87	77
5.00	106	100	96	103	98	94	98	94	90	80
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3℃
Operators: Chen Songyu
Test Date: 2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.520m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.26V I:0.1558A P:36.591W PF:0.9777 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4779.03x1 lm		
Name: SLB-40W-CC	Type: 40W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

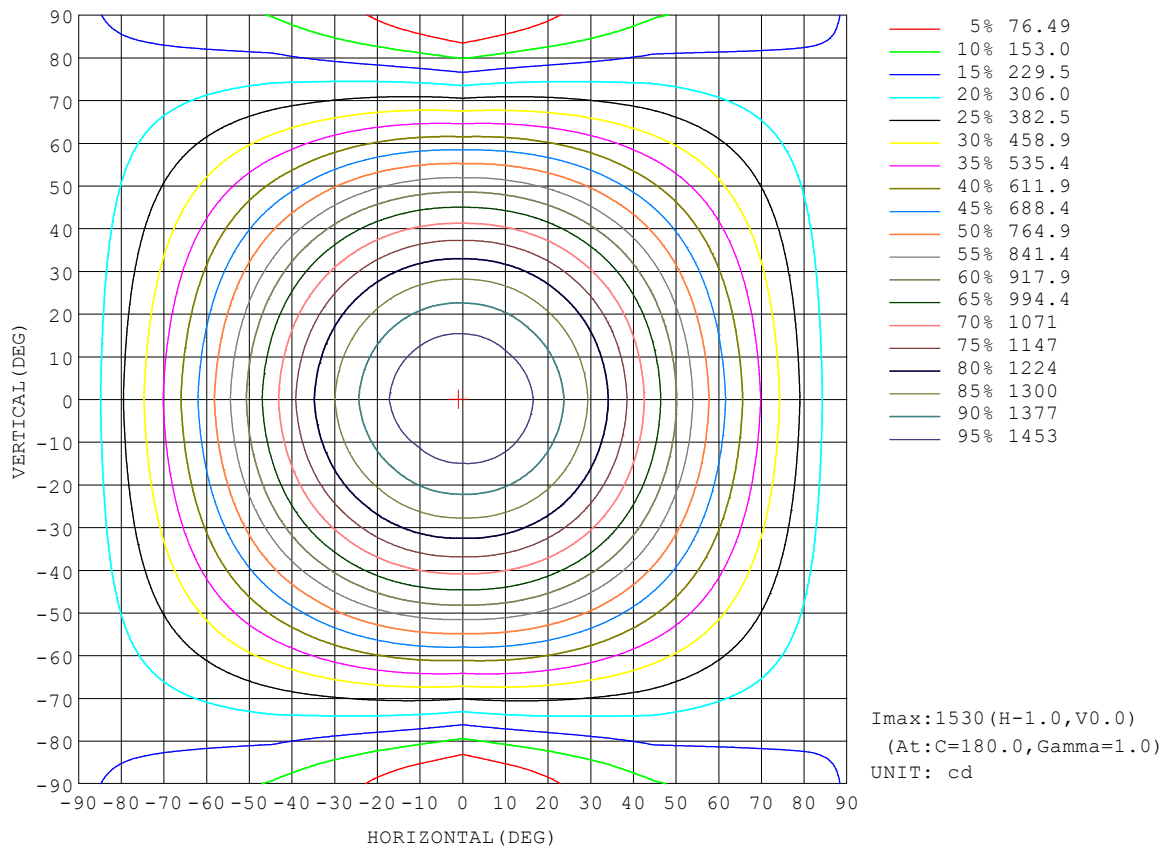


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.26V I:0.1558A P:36.591W PF:0.9777 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4779.03x1 lm		
Name: SLB-40W-CC	Type: 40W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

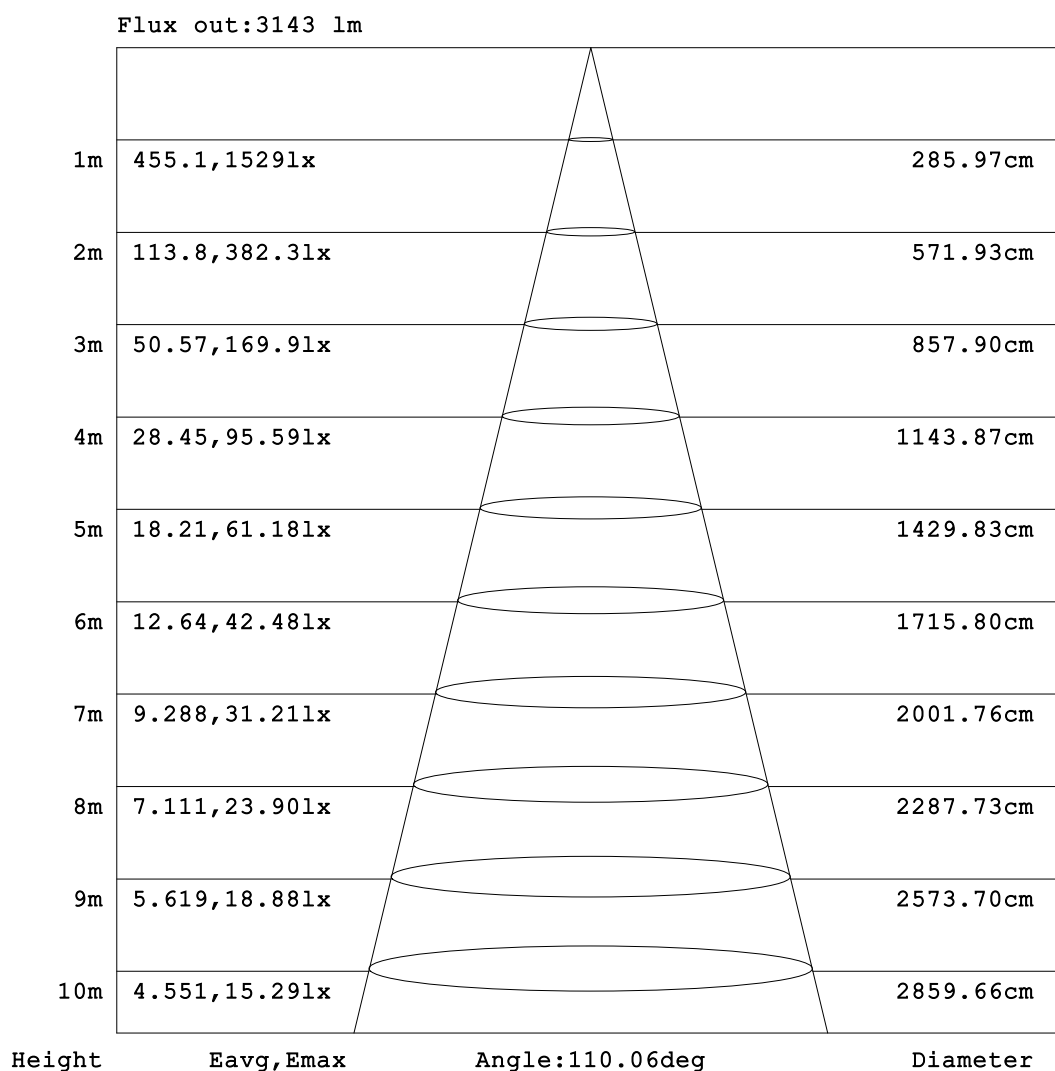


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.26V I:0.1558A P:36.591W PF:0.9777 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4779.03x1 lm		
Name: SLB-40W-CC	Type: 40W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

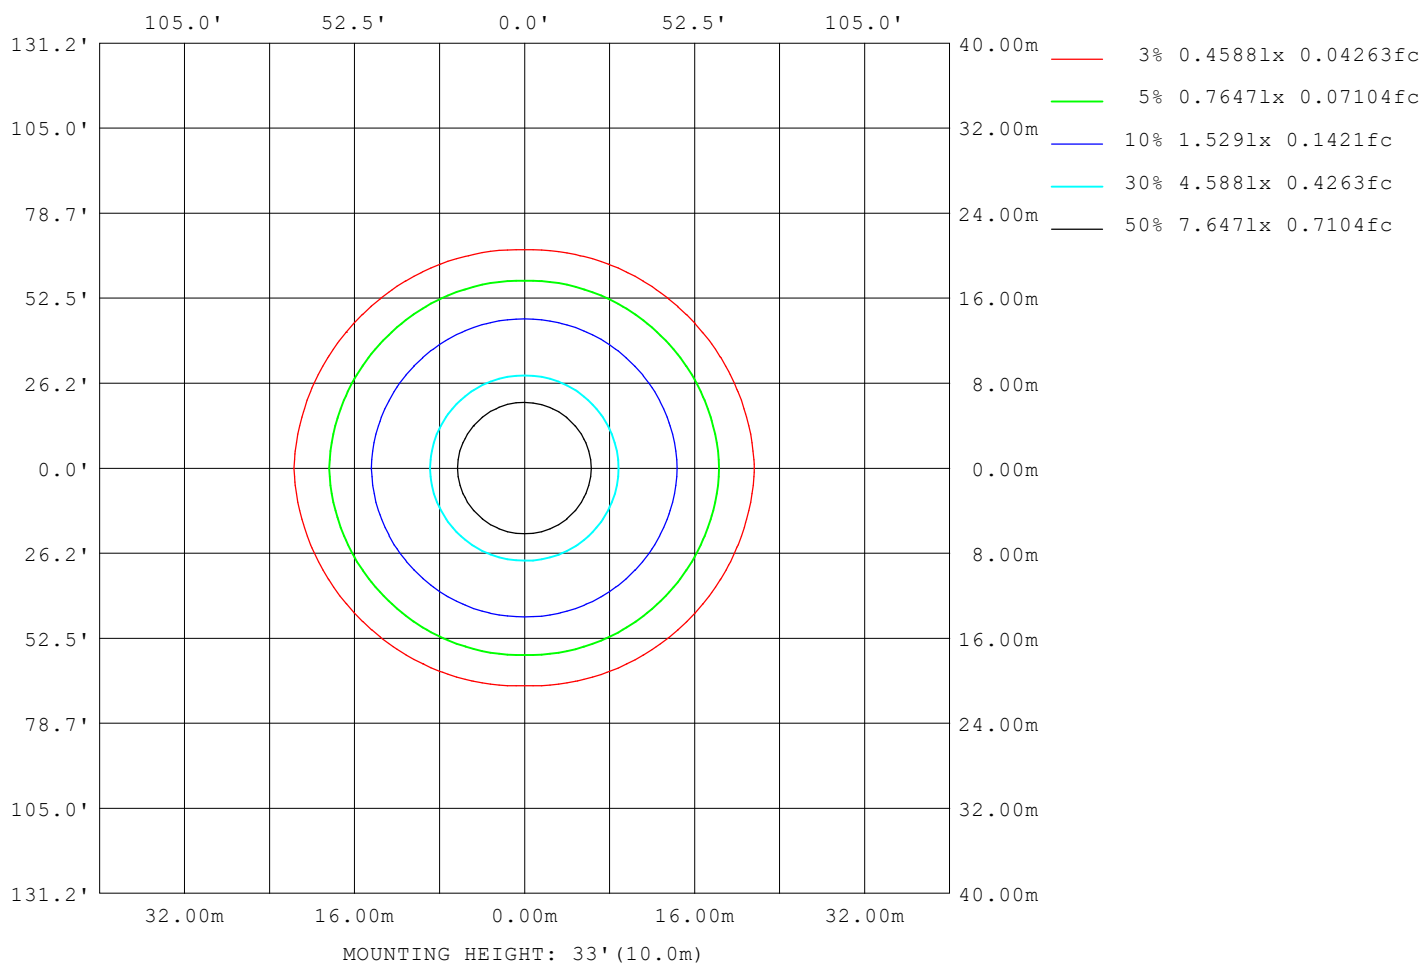

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.26V I:0.1558A P:36.591W PF:0.9777 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4779.03x1 lm		
Name: SLB-40W-CC	Type: 40W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:


AvgL	cd/m2
L_0~180 (65) av	20430
L_0~180 (75) av	23946
L_0~180 (85) av	47368
L_90~270 (65) av	16990
L_90~270 (75) av	14094
L_90~270 (85) av	7640
L_45 (65) av	18491
L_45 (75) av	19611
L_45 (85) av	33291

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

Planar Illuminance Curve

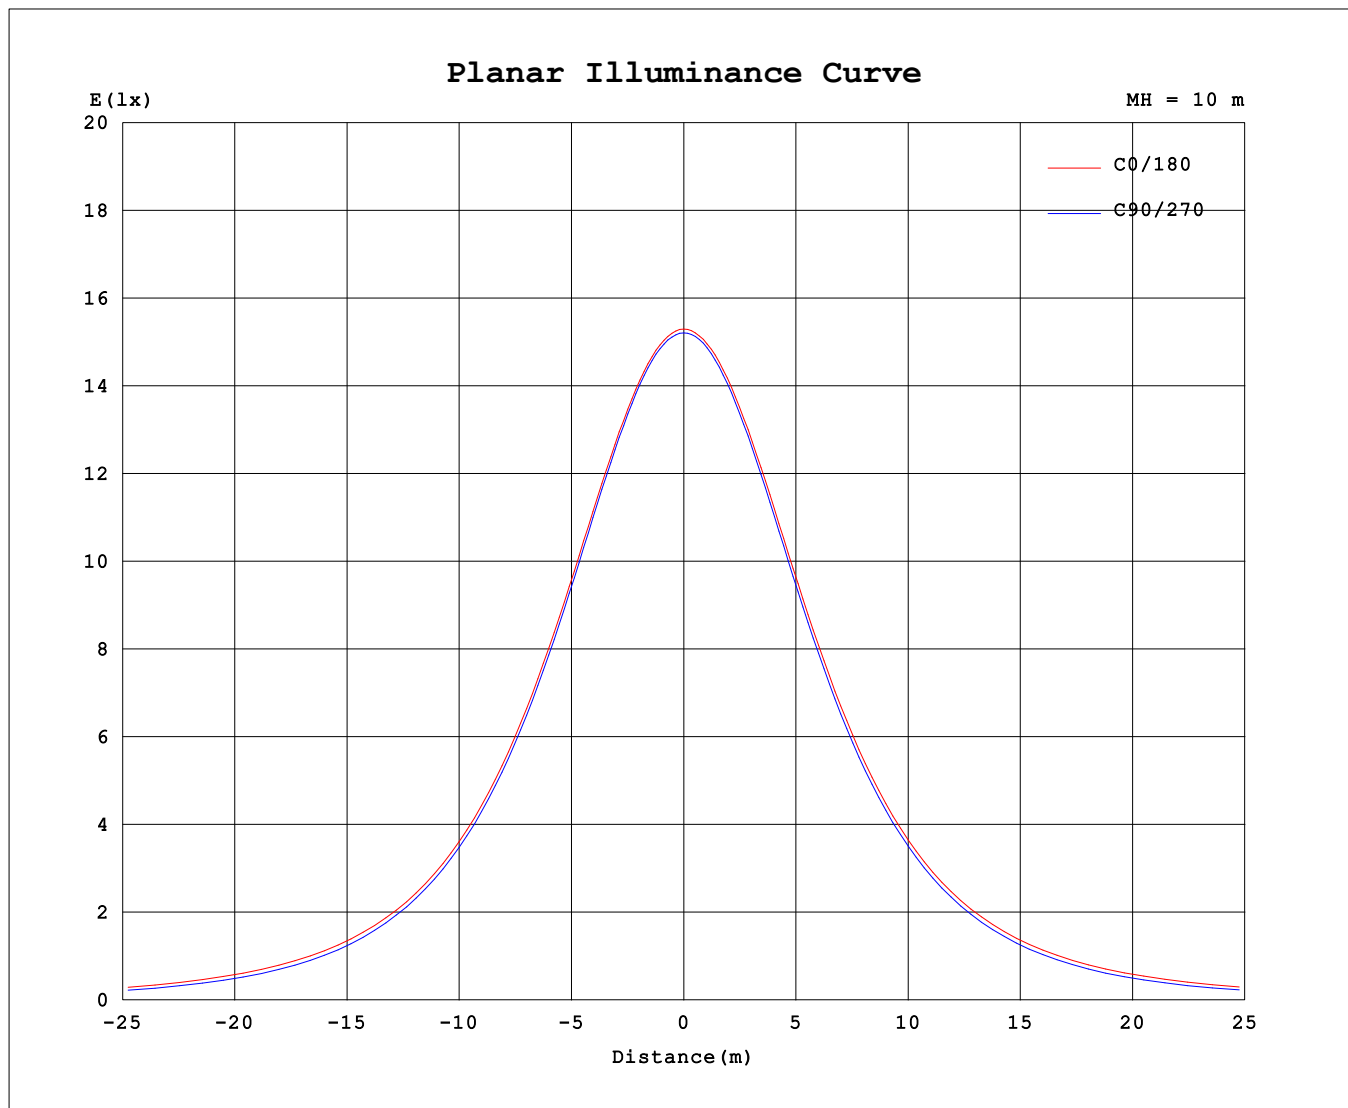

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: Chen Songyu
Test Date: 2025-02-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.520m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.26V I:0.1558A P:36.591W PF:0.9777 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4779.03x1 lm		
Name: SLB-40W-CC	Type: 40W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1523	1523	1523	1523	1523	1523	1523	1523										
5	1516	1516	1515	1516	1517	1517	1517	1515										
10	1495	1495	1493	1495	1498	1495	1494	1493										
15	1460	1460	1455	1460	1466	1461	1458	1459										
20	1414	1411	1405	1412	1421	1414	1409	1410										
25	1355	1351	1342	1353	1363	1354	1347	1350										
30	1285	1278	1268	1281	1295	1282	1273	1279										
35	1205	1196	1183	1198	1215	1199	1189	1196										
40	1115	1104	1089	1106	1127	1108	1096	1105										
45	1018	1004	988	1006	1030	1008	995	1005										
50	918	898	878	899	929	900	886	899										
55	817	787	763	787	826	789	771	788										
60	717	674	641	674	726	676	649	676										
65	621	565	516	564	628	566	524	566										
70	530	462	387	460	537	463	395	463										
75	445	367	260	366	452	368	268	368										
80	366	283	141	282	373	284	148	283										
85	295	209	46.8	210	302	211	49.5	209										
90	232	148	2.51	149	239	150	2.79	148										
95	176	98.6	3.14	101	184	102	3.25	98.7										
100	128	61.4	3.96	63.7	136	64.7	4.06	61.2										
105	89.0	35.0	4.86	37.2	95.9	38.0	4.96	34.8										
110	57.5	18.6	5.79	20.4	63.8	20.9	5.89	18.5										
115	34.7	10.4	6.75	11.5	39.8	11.7	6.84	10.5										
120	19.5	8.07	7.71	8.27	23.2	8.42	7.80	8.20										
125	11.8	8.89	8.70	8.86	13.9	8.90	8.76	9.01										
130	9.69	9.81	9.70	9.78	10.3	9.80	9.73	9.90										
135	10.5	10.7	10.7	10.7	10.9	10.7	10.7	10.8										
140	11.3	11.6	11.6	11.5	11.7	11.5	11.6	11.7										
145	12.1	12.4	12.4	12.4	12.4	12.3	12.4	12.5										
150	12.9	13.2	13.2	13.1	12.9	13.0	13.1	13.2										
155	13.6	13.9	13.8	13.8	13.6	13.7	13.8	13.9										
160	14.3	14.3	14.3	14.3	14.3	14.4	14.4	14.5										
165	14.9	14.8	14.8	14.8	14.9	14.9	14.9	15.0										
170	15.5	15.3	15.2	15.3	15.5	15.3	15.3	15.5										
175	15.9	15.6	15.6	15.7	15.9	15.6	15.6	15.7										
180	16.1	15.8	15.7	15.9	16.1	15.8	15.8	15.8										

C Range: 0 - 360DEG

C Interval: 45.0DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Chen Songyu

Test Date:2025-02-25

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:9.520m [K=1.0000]

Remarks: