


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.20V I:0.0858A P:19.463W PF:0.9441 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2588.16x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 5700K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 132.98 lm/W			
MODEL	SLB-40W-CC	Imax (cd)	823.6	S/MH(C0/180)	1.25
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	2588.2	η UP,DN(C0-180)	2.2,47.7
NOMINAL FLUX(lm)	2588.16	CIE CLASS	DIRECT	η UP,DN(C180-360)	2.2,48.0
LAMPS INSIDE	1	η up (%)	4.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	240	η down (%)	95.6	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

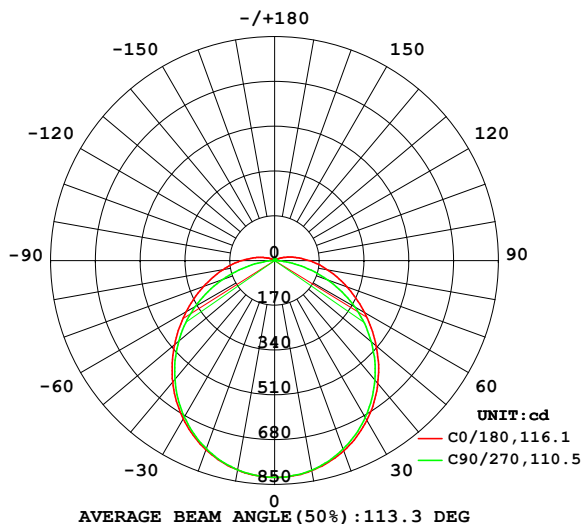

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

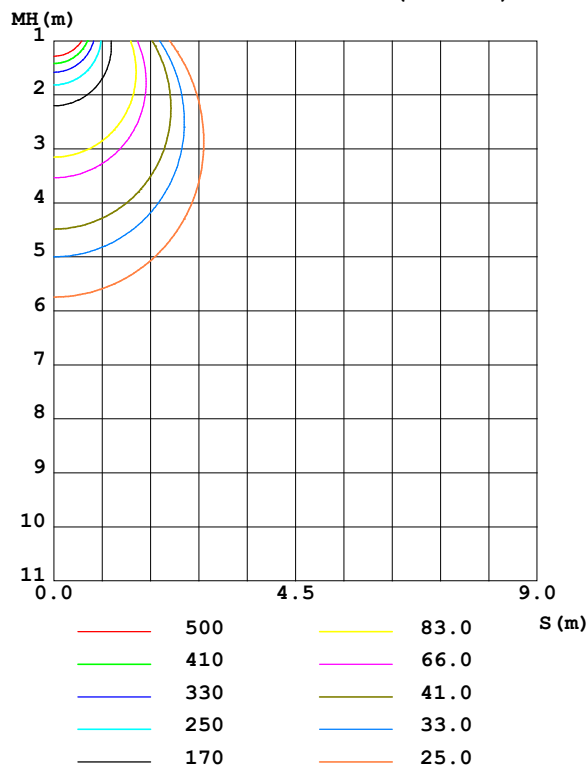

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	807.4	807.0	806.5	808.5	809.8	808.3	807.9	807.8	0- 10	77.83	77.83	3.01,3.01
20	764.3	761.9	759.2	764.3	768.3	763.8	760.6	762.9	10- 20	222.6	300.5	11.6,11.6
30	694.1	690.6	685.8	692.9	700.3	693.2	687.9	691.4	20- 30	336.7	637.2	24.6,24.6
40	602.3	596.3	589.2	599.1	609.8	599.8	592.1	596.8	30- 40	405.1	1042	40.3,40.3
50	495.9	484.4	475.4	487.2	503.4	487.9	479.3	484.8	40- 50	419.9	1462	56.5,56.5
60	387.5	364.0	346.9	366.3	394.3	366.7	351.0	364.9	50- 60	382.7	1845	71.3,71.3
70	286.6	249.8	209.5	250.9	292.6	251.4	213.7	249.8	60- 70	305.5	2150	83.1,83.1
80	198.4	153.4	76.69	154.5	204.3	155.1	79.87	153.3	70- 80	208.3	2359	91.1,91.1
90	126.0	80.55	1.374	82.32	131.4	83.18	1.533	80.51	80- 90	116.0	2475	95.6,95.6
100	70.14	33.61	2.140	35.48	75.29	35.98	2.206	33.50	90-100	58.25	2533	97.9,97.9
110	31.61	10.24	3.126	11.44	35.59	11.65	3.191	10.15	100-110	25.61	2559	98.9,98.9
120	10.78	4.393	4.160	4.518	12.95	4.597	4.207	4.460	110-120	9.563	2568	99.2,99.2
130	5.251	5.304	5.232	5.269	5.638	5.280	5.253	5.369	120-130	4.945	2573	99.4,99.4
140	6.121	6.268	6.258	6.234	6.304	6.214	6.246	6.314	130-140	4.464	2577	99.6,99.6
150	6.946	7.119	7.109	7.079	6.960	7.034	7.066	7.146	140-150	4.179	2582	99.7,99.7
160	7.720	7.746	7.735	7.730	7.713	7.744	7.752	7.853	150-160	3.424	2585	99.9,99.9
170	8.358	8.254	8.237	8.265	8.373	8.276	8.275	8.360	160-170	2.269	2587	100,100
180	8.690	8.531	8.500	8.569	8.696	8.514	8.509	8.572	170-180	0.8038	2588	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1253.8 lm

%lum = 48.4%

%lamp = 48.4%

Conical surface Flux(120deg): 1844.9 lm

%lum = 71.3%


%lamp = 71.3%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Chen Songyu
 Test Date:2025-02-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.520m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.20V I:0.0858A P:19.463W PF:0.9441 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2588.16x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 5700K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

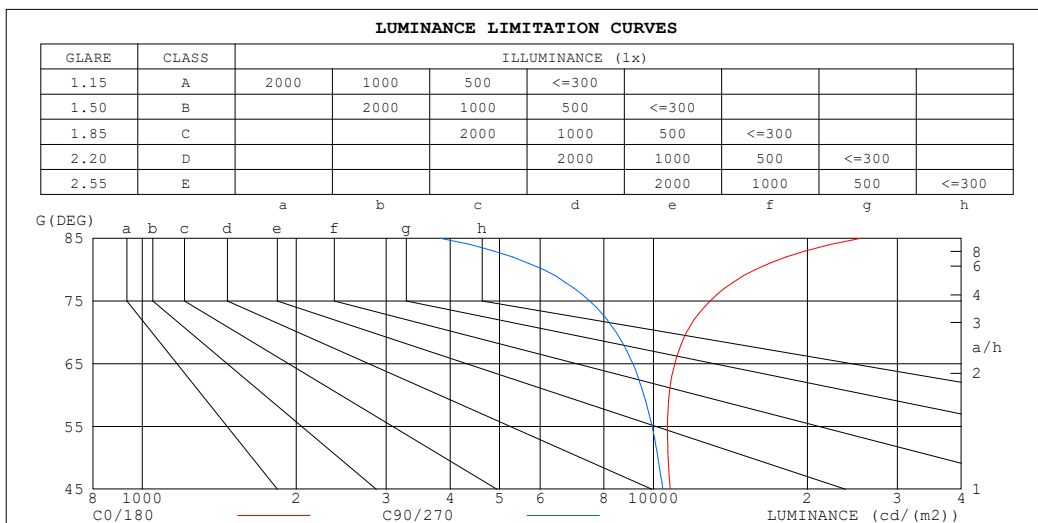

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	25463	3825
80	15825	6096
75	12906	7503
70	11607	8454
65	11007	9112
60	10735	9575
55	10652	9938
50	10687	10208
45	10776	10428


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Chen Songyu
Test Date: 2025-02-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.520m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.20V I:0.0858A P:19.463W PF:0.9441 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:2588.16x1 lm		
Name: SLB-40W-CC		Type: 20W		Weight:				
SPEC.: 5700K		DIM.:		Instrument No.: HUP-IES-B3				
MFR.: EVERFINE		SUR.: 1.080*0.067		shielding angle:				

pcc	80%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

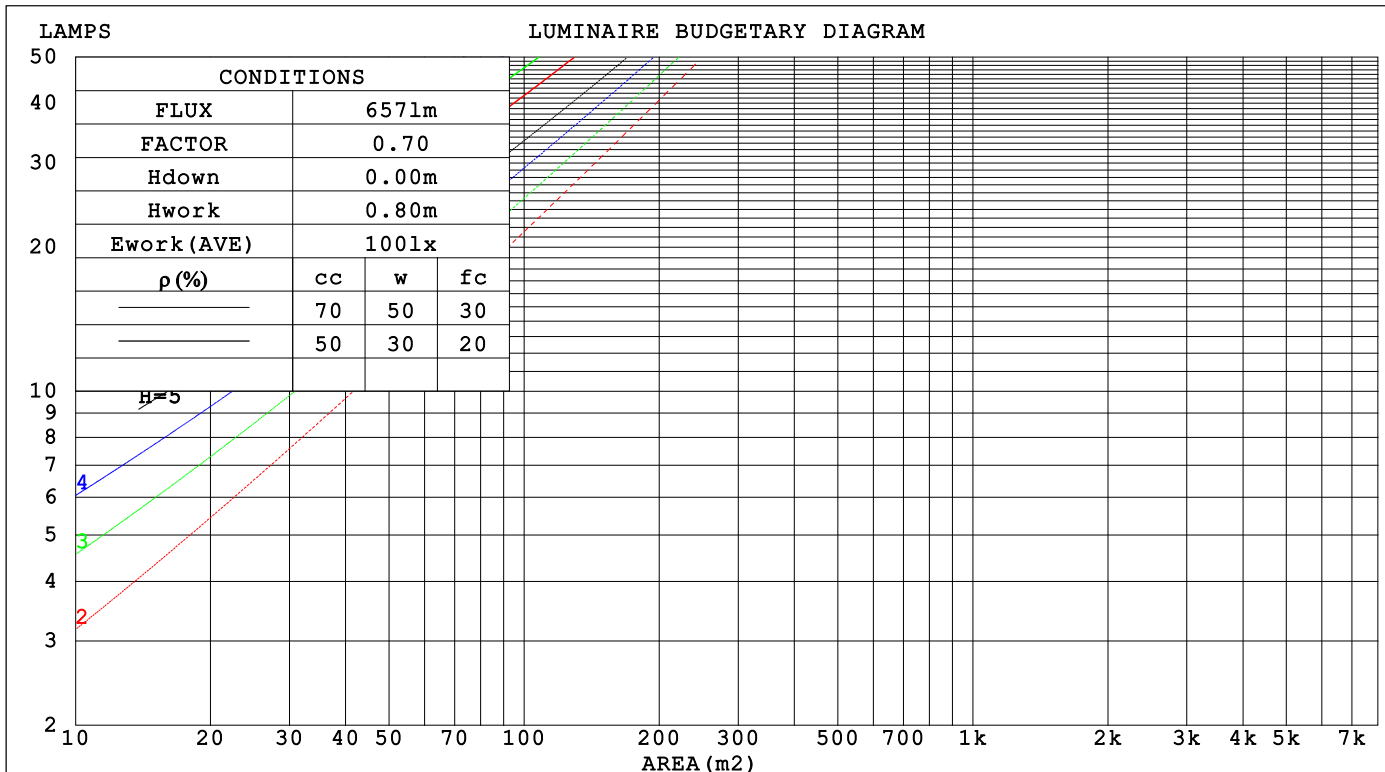

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.20V I:0.0858A P:19.463W PF:0.9441 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2588.16x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 5700K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.342	.194	.062	.333	.190	.060	.318	.182	.058	.303	.175	.056	.289	.168	.054		
2.0	.309	.169	.052	.301	.166	.051	.287	.160	.050	.274	.154	.048	.262	.148	.047		
3.0	.281	.149	.045	.274	.147	.044	.261	.142	.043	.250	.137	.042	.239	.132	.041		
4.0	.256	.133	.039	.250	.131	.039	.239	.127	.038	.228	.123	.037	.219	.119	.036		
5.0	.235	.120	.035	.230	.118	.034	.220	.114	.034	.210	.111	.033	.202	.108	.032		
6.0	.217	.109	.031	.212	.107	.031	.203	.104	.030	.195	.101	.030	.187	.098	.029		
7.0	.201	.099	.028	.197	.098	.028	.189	.095	.027	.181	.093	.027	.174	.090	.027		
8.0	.187	.092	.026	.184	.090	.026	.176	.088	.025	.169	.086	.025	.163	.084	.024		
9.0	.175	.085	.024	.172	.084	.023	.165	.082	.023	.159	.080	.023	.153	.078	.022		
10.0	.165	.079	.022	.161	.078	.022	.155	.076	.021	.149	.074	.021	.144	.072	.021		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.224	.224	.224	.191	.191	.191	.131	.131	.131	.075	.075	.075	.024	.024	.024		
1.0	.216	.190	.166	.185	.163	.142	.127	.112	.099	.073	.065	.057	.023	.021	.019		
2.0	.208	.166	.130	.179	.143	.112	.122	.099	.078	.071	.057	.046	.023	.019	.015		
3.0	.201	.148	.107	.172	.128	.093	.118	.089	.065	.068	.052	.038	.022	.017	.013		
4.0	.193	.135	.092	.165	.117	.080	.114	.082	.056	.066	.048	.033	.021	.016	.011		
5.0	.185	.125	.081	.159	.108	.070	.110	.076	.050	.063	.044	.029	.020	.014	.010		
6.0	.178	.117	.073	.153	.101	.064	.105	.071	.045	.061	.042	.027	.020	.014	.009		
7.0	.171	.110	.067	.147	.095	.059	.102	.067	.042	.059	.039	.025	.019	.013	.008		
8.0	.164	.104	.063	.141	.090	.055	.098	.064	.039	.057	.037	.023	.018	.012	.008		
9.0	.158	.099	.060	.136	.086	.052	.094	.061	.037	.055	.036	.022	.018	.012	.007		
10.0	.152	.095	.057	.131	.083	.050	.091	.058	.035	.053	.034	.021	.017	.011	.007		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.20V I:0.0858A P:19.463W PF:0.9441 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2588.16x1 lm											
Name: SLB-40W-CC						Type: 20W			Weight:		
SPEC.: 5700K						DIM.:			Instrument No.: HUP-IES-B3		
MFR.: EVERFINE						SUR.: 1.080*0.067			shielding angle:		
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		20.8	22.3	21.1	22.6	22.9	20.4	21.9	20.7	22.2	22.5
3H		22.7	24.1	23.1	24.4	24.7	21.9	23.3	22.3	23.6	23.9
4H		23.7	25.0	24.1	25.4	25.7	22.5	23.8	22.8	24.1	24.5
6H		24.8	26.0	25.2	26.4	26.8	22.8	24.1	23.2	24.4	24.8
8H		25.4	26.6	25.8	26.9	27.3	22.9	24.1	23.3	24.5	24.9
12H		26.0	27.2	26.4	27.5	27.9	22.9	24.1	23.4	24.5	24.9
4H 2H		21.4	22.7	21.8	23.0	23.4	21.1	22.4	21.5	22.7	23.1
3H		23.5	24.7	23.9	25.0	25.4	22.8	23.9	23.2	24.3	24.7
4H		24.7	25.7	25.1	26.1	26.6	23.5	24.6	24.0	25.0	25.4
6H		25.9	26.9	26.4	27.3	27.8	24.1	25.0	24.5	25.4	25.9
8H		26.6	27.5	27.1	27.9	28.4	24.2	25.1	24.7	25.6	26.0
12H		27.4	28.2	27.9	28.7	29.2	24.3	25.1	24.8	25.6	26.1
8H 4H		25.0	25.9	25.5	26.3	26.8	24.0	24.9	24.5	25.3	25.8
6H		26.5	27.2	27.0	27.7	28.2	24.8	25.5	25.3	26.0	26.5
8H		27.3	28.0	27.9	28.5	29.0	25.1	25.8	25.6	26.3	26.8
12H		28.3	28.9	28.9	29.4	30.0	25.3	25.9	25.9	26.4	27.0
12H 4H		25.0	25.8	25.5	26.3	26.8	24.1	24.9	24.6	25.4	25.9
6H		26.6	27.2	27.1	27.8	28.3	25.0	25.7	25.6	26.2	26.7
8H		27.5	28.1	28.1	28.6	29.2	25.4	26.0	26.0	26.5	27.1
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 2588 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.3)
Area: 0.07236 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.20V I:0.0858A P:19.463W PF:0.9441 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2588.16x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 5700K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	55	43	36	54	43	36	53	42	36	29
0.80	65	53	45	63	52	45	61	51	44	37
1.00	73	61	53	71	60	53	69	62	52	45
1.25	80	68	61	78	68	60	75	66	59	52
1.50	85	74	66	83	73	66	79	71	65	56
2.00	92	82	75	89	81	74	85	78	72	64
2.50	96	87	80	93	85	79	89	82	77	68
3.00	99	91	85	97	90	84	92	86	81	72
4.00	103	97	91	101	95	90	96	91	87	76
5.00	106	100	95	103	98	94	98	94	90	80
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3℃
Operators: Chen Songyu
Test Date: 2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.520m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.20V I:0.0858A P:19.463W PF:0.9441 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2588.16x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 5700K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

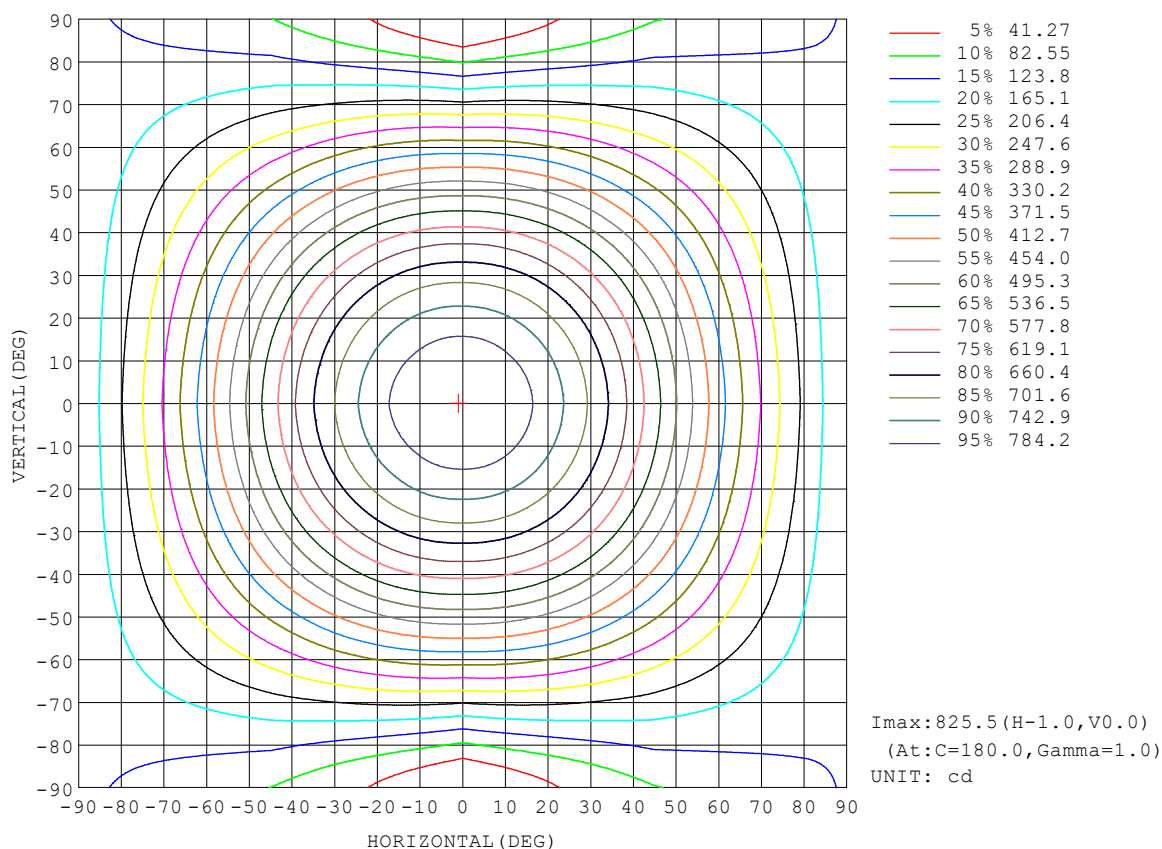


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.20V I:0.0858A P:19.463W PF:0.9441 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2588.16x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 5700K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

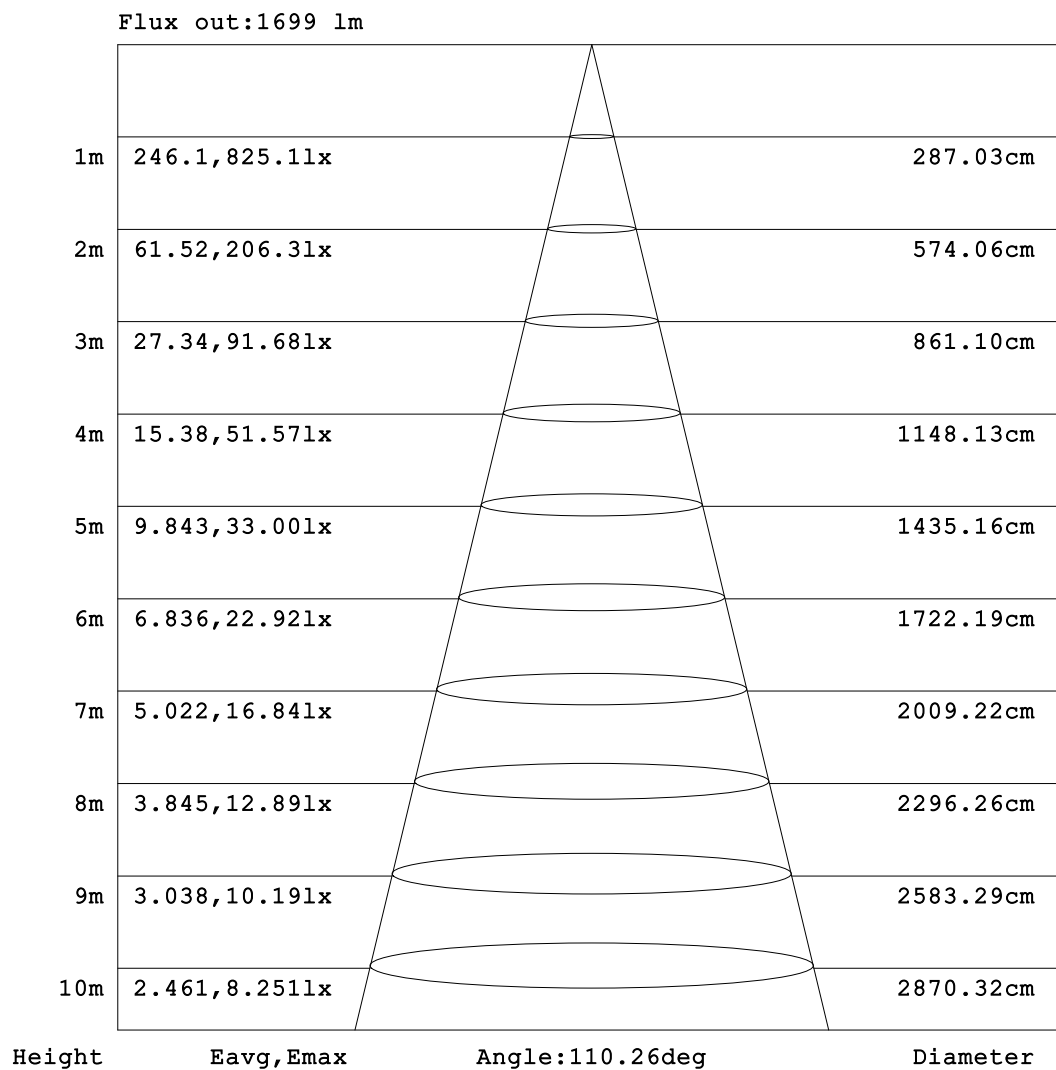


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Chen Songyu
Test Date: 2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.520m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.20V I:0.0858A P:19.463W PF:0.9441 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2588.16x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 5700K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

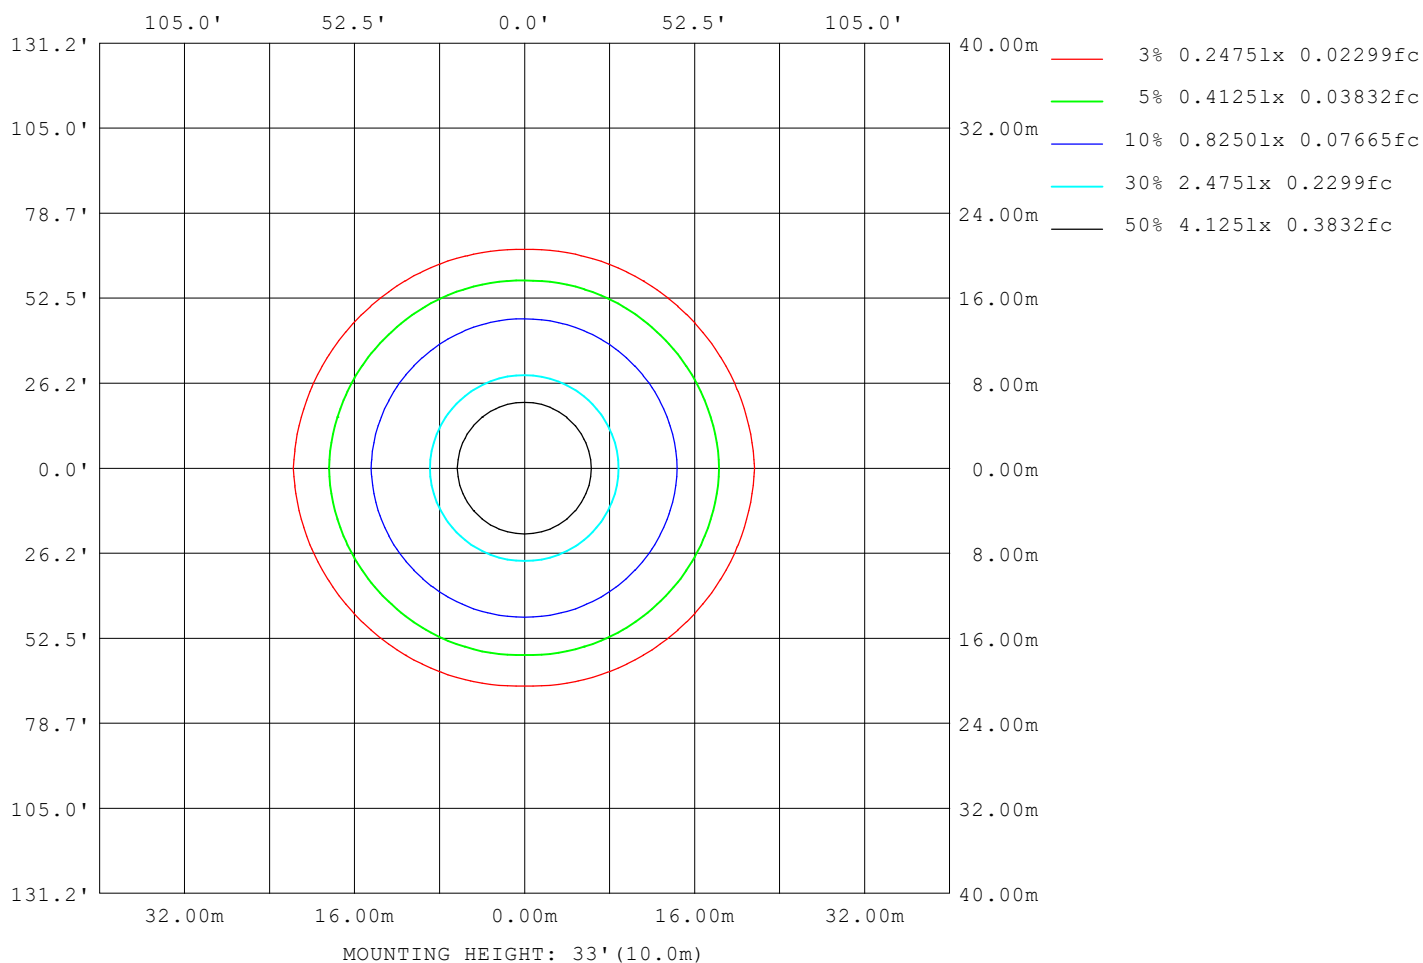

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.20V I:0.0858A P:19.463W PF:0.9441 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2588.16x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 5700K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:


AvgL	cd/m2
L_0~180 (65) av	11082
L_0~180 (75) av	13021
L_0~180 (85) av	25870
L_90~270 (65) av	9191
L_90~270 (75) av	7624
L_90~270 (85) av	4029
L_45 (65) av	10018
L_45 (75) av	10655
L_45 (85) av	18176

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2025-02-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

Planar Illuminance Curve

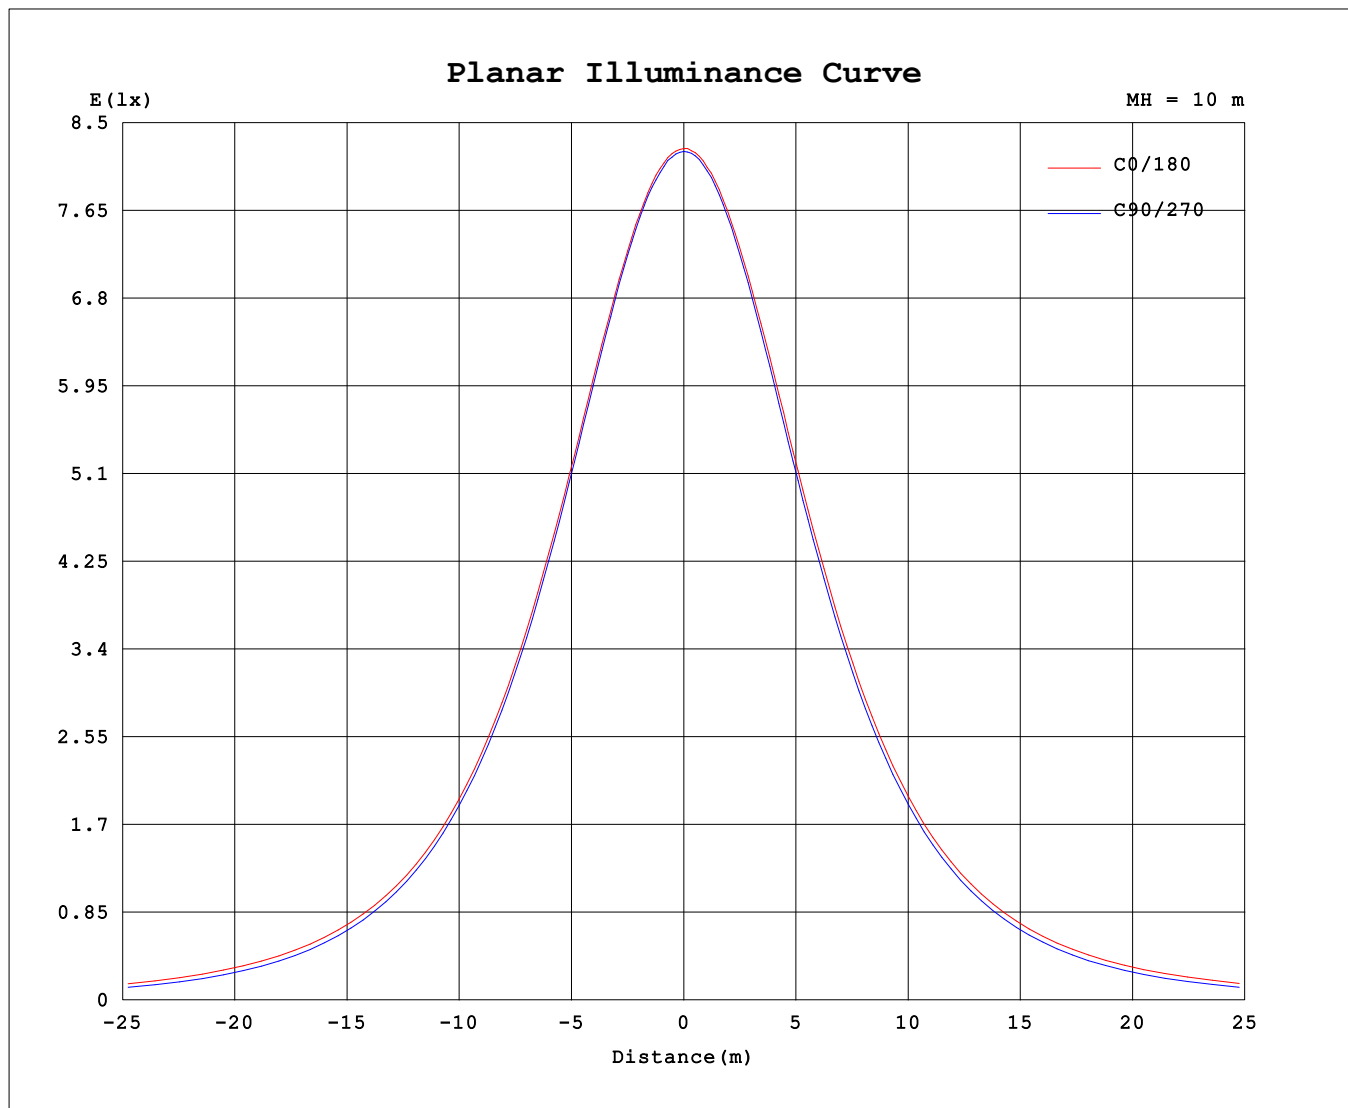

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: Chen Songyu
 Test Date: 2025-02-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.520m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.20V I:0.0858A P:19.463W PF:0.9441 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2588.16x1 lm		
Name: SLB-40W-CC	Type: 20W	Weight:
SPEC.: 5700K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: EVERFINE	SUR.: 1.080*0.067	shielding angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	823	823	823	823	823	823	823	823										
5	819	819	818	820	820	819	819	820										
10	807	807	807	808	810	808	808	808										
15	789	788	787	790	792	789	789	788										
20	764	762	759	764	768	764	761	763										
25	732	730	726	732	737	732	728	730										
30	694	691	686	693	700	693	688	691										
35	651	646	640	648	658	649	643	647										
40	602	596	589	599	610	600	592	597										
45	550	542	534	545	558	545	538	543										
50	496	484	475	487	503	488	479	485										
55	441	425	413	427	448	427	417	425										
60	388	364	347	366	394	367	351	365										
65	336	306	279	307	342	307	283	306										
70	287	250	209	251	293	251	214	250										
75	241	199	141	200	247	200	145	199										
80	198	153	76.7	154	204	155	79.9	153										
85	160	114	24.2	115	166	116	26.7	114										
90	126	80.5	1.37	82.3	131	83.2	1.53	80.5										
95	95.9	53.8	1.69	55.8	101	56.5	1.76	53.8										
100	70.1	33.6	2.14	35.5	75.3	36.0	2.21	33.5										
105	48.7	19.2	2.62	20.9	53.3	21.2	2.68	19.1										
110	31.6	10.2	3.13	11.4	35.6	11.6	3.19	10.1										
115	19.1	5.77	3.64	6.37	22.2	6.50	3.70	5.75										
120	10.8	4.39	4.16	4.52	12.9	4.60	4.21	4.46										
125	6.51	4.80	4.69	4.77	7.70	4.80	4.73	4.88										
130	5.25	5.30	5.23	5.27	5.64	5.28	5.25	5.37										
135	5.68	5.79	5.76	5.75	5.86	5.76	5.77	5.85										
140	6.12	6.27	6.26	6.23	6.30	6.21	6.25	6.31										
145	6.54	6.72	6.71	6.67	6.72	6.65	6.69	6.76										
150	6.95	7.12	7.11	7.08	6.96	7.03	7.07	7.15										
155	7.34	7.49	7.47	7.47	7.34	7.41	7.43	7.52										
160	7.72	7.75	7.74	7.73	7.71	7.74	7.75	7.85										
165	8.05	8.01	8.00	8.01	8.04	8.04	8.04	8.13										
170	8.36	8.25	8.24	8.27	8.37	8.28	8.27	8.36										
175	8.58	8.43	8.40	8.46	8.59	8.43	8.43	8.49										
180	8.69	8.53	8.50	8.57	8.70	8.51	8.51	8.57										

C Range: 0 - 360DEG

C Interval: 45.0DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Chen Songyu

Test Date:2025-02-25

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:9.520m [K=1.0000]

Remarks: