


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.70V I:0.1451A P:30.760W PF:0.9188 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3896.99x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 126.69 lm/W			
MODEL	SLB-40W-CC	I _{max} (cd)	1254	S/MH(C0/180)	1.28
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	3897.0	η UP, DN(C0-180)	1.9, 47.6
NOMINAL FLUX(lm)	3896.99	CIE CLASS	DIRECT	η UP, DN(C180-360)	2.2, 48.2
LAMPS INSIDE	1	η up(%)	4.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230	η down(%)	95.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

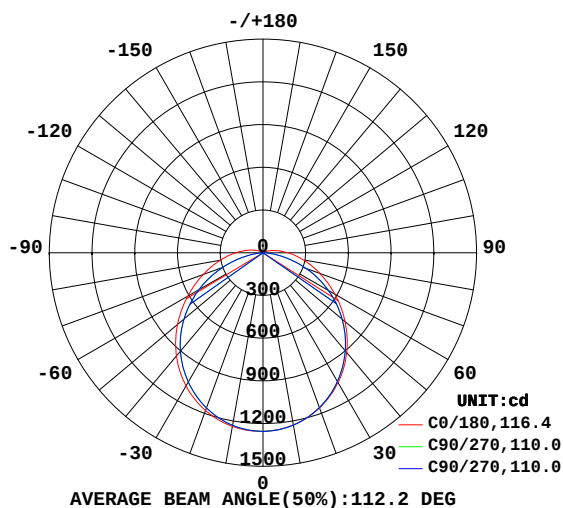

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

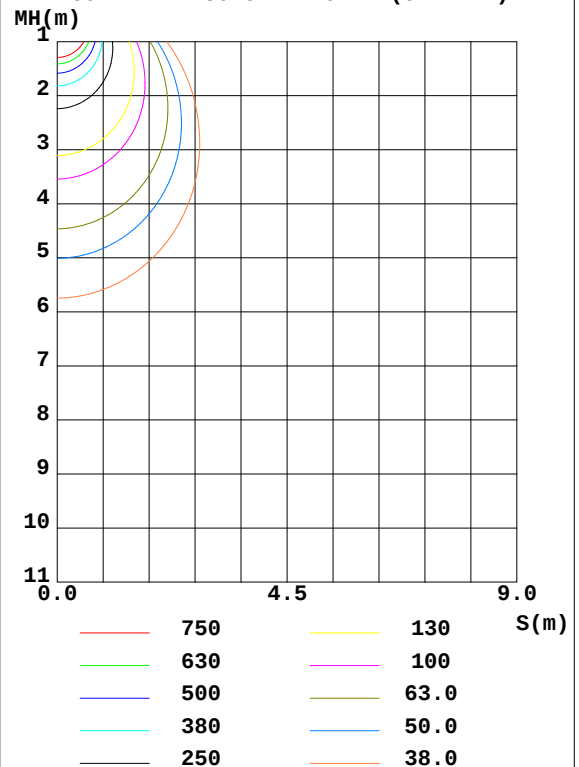

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:RD
Test Date:2023-10-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270				γ	Φ zone	Φ total	%lum, lamp
10	1228	1229	1238	1230				0- 10	118.6	118.6	3.04, 3.04
20	1160	1158	1179	1160				10- 20	339.5	458.1	11.8, 11.8
30	1054	1045	1081	1049				20- 30	514.0	972.1	24.9, 24.9
40	914.9	898.9	945.8	902.7				30- 40	619.3	1591	40.8, 40.8
50	752.6	725.9	783.4	723.7				40- 50	643.2	2235	57.3, 57.3
60	584.0	531.6	610.3	519.4				50- 60	585.6	2820	72.4, 72.4
70	425.1	321.3	446.9	301.2				60- 70	462.5	3283	84.2, 84.2
80	287.4	120.3	304.8	95.01				70- 80	301.5	3584	92, 92
90	175.0	1.894	191.9	2.089				80- 90	151.2	3735	95.9, 95.9
100	91.52	2.467	106.9	2.953				90-100	76.97	3812	97.8, 97.8
110	38.40	3.914	49.51	4.427				100-110	38.54	3851	98.8, 98.8
120	13.97	5.432	19.28	5.973				110-120	16.57	3868	99.2, 99.2
130	7.373	7.016	8.245	7.540				120-130	8.071	3876	99.5, 99.5
140	8.616	8.591	8.827	9.002				130-140	6.238	3882	99.6, 99.6
150	9.845	9.920	10.06	10.19				140-150	5.888	3888	99.8, 99.8
160	11.02	11.01	11.15	11.13				150-160	4.873	3893	99.9, 99.9
170	11.98	11.78	12.01	11.82				160-170	3.252	3896	100, 100
180	12.36	12.10	12.37	12.10				170-180	1.151	3897	100, 100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

Conical surface Flux(90deg): 1915.4 lm

%lum = 49.1%

%lamp = 49.1%

Conical surface Flux(120deg): 2820.2 lm

%lum = 72.4%

%lamp = 72.4%

0 - 45 DEG Zonal Flux:1915.4 %lum: 49.1%

0 - 60 DEG Zonal Flux:2820.2 %lum: 72.4%

All measured values may vary less than 35 %

from the average measured value in the 0 to 130 deg. zone: 16.2%

All measured values in the 0 to 130 deg. zone


may vary less than 50% from the average value of itself: 23.5%

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:RD
Test Date:2023-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.70V I:0.1451A P:30.760W PF:0.9188 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3896.99x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:

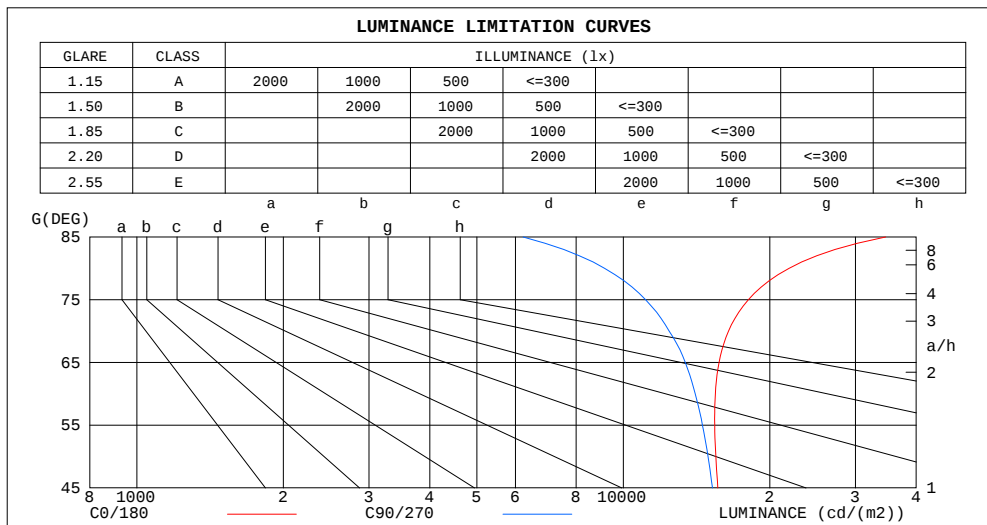

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	34603	6224
80	21908	9155
75	18068	11109
70	16448	12419
65	15732	13405
60	15459	14056
55	15411	14544
50	15495	14930
45	15642	15246


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: RD
Test Date: 2023-10-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.70V I:0.1451A P:30.760W PF:0.9188 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3896.99x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.03	1.03	1.03	.98	.98	.98	.96
1.0	1.02	.97	.93	.99	.95	.91	.94	.90	.87	.89	.86	.84	.85	.83	.81	.78
2.0	.88	.81	.75	.86	.79	.74	.82	.76	.71	.78	.73	.69	.74	.70	.67	.64
3.0	.77	.69	.62	.75	.67	.61	.72	.65	.59	.68	.63	.58	.65	.60	.56	.54
4.0	.68	.59	.52	.67	.58	.52	.63	.56	.50	.61	.54	.49	.58	.53	.48	.46
5.0	.61	.52	.45	.59	.51	.44	.57	.49	.44	.54	.48	.43	.52	.46	.42	.40
6.0	.55	.46	.39	.54	.45	.39	.51	.44	.38	.49	.42	.37	.47	.41	.37	.35
7.0	.50	.41	.34	.49	.40	.34	.47	.39	.34	.45	.38	.33	.43	.37	.33	.30
8.0	.45	.37	.31	.44	.36	.30	.43	.35	.30	.41	.34	.30	.40	.34	.29	.27
9.0	.41	.33	.28	.41	.33	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.24
10.0	.38	.30	.25	.38	.30	.25	.36	.29	.24	.35	.29	.24	.34	.28	.24	.22

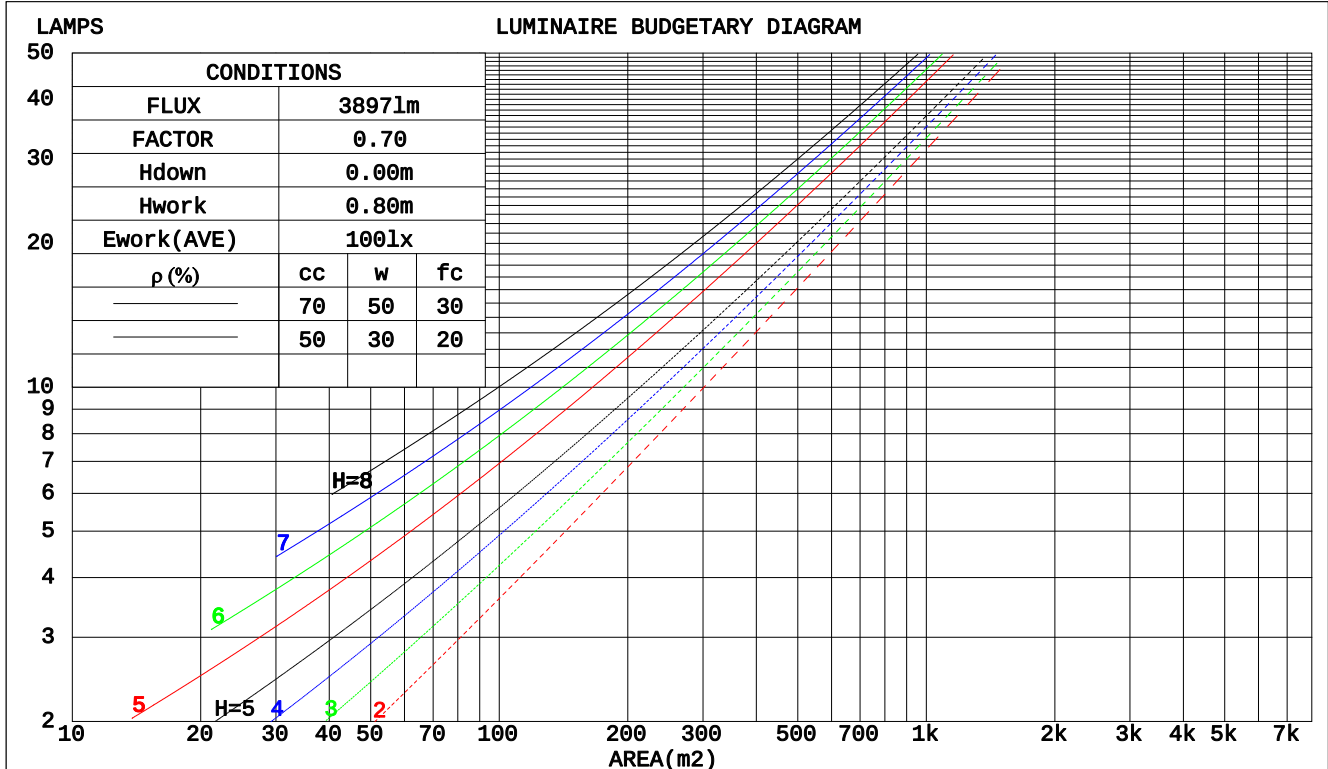

WEC AND CCEC

Test:U:230.70V I:0.1451A P:30.760W PF:0.9188 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3896.99x1 lm					
NAME: SLB-40W-CC			TYPE: 30W		WEIGHT:
SPEC.: 5700K			DIM.:		SERIAL No.: UP-IES4-R&D
MFR.:			SUR.: 0.0756		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.334	.190	.060	.326	.186	.059	.310	.178	.057	.296	.171	.055	.282	.164	.053	
2.0	.305	.167	.051	.297	.164	.050	.283	.158	.049	.270	.152	.047	.258	.146	.046	
3.0	.278	.148	.044	.271	.145	.044	.259	.140	.043	.247	.136	.042	.237	.131	.041	
4.0	.254	.132	.039	.248	.130	.038	.237	.126	.038	.227	.122	.037	.217	.118	.036	
5.0	.234	.119	.035	.229	.117	.034	.219	.114	.034	.209	.110	.033	.201	.107	.032	
6.0	.216	.108	.031	.211	.107	.031	.202	.104	.030	.194	.101	.030	.186	.098	.029	
7.0	.201	.099	.028	.196	.098	.028	.188	.095	.027	.181	.093	.027	.174	.090	.027	
8.0	.187	.091	.026	.183	.090	.025	.176	.088	.025	.169	.086	.025	.162	.083	.024	
9.0	.175	.085	.024	.171	.084	.023	.165	.081	.023	.159	.079	.023	.153	.078	.022	
10.0	.164	.079	.022	.161	.078	.022	.155	.076	.021	.149	.074	.021	.144	.072	.021	

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.222	.222	.222	.190	.190	.190	.130	.130	.130	.074	.074	.074	.024	.024	.024	
1.0	.214	.188	.164	.183	.161	.141	.125	.111	.098	.072	.064	.057	.023	.021	.018	
2.0	.206	.164	.128	.176	.141	.111	.121	.098	.077	.070	.057	.045	.022	.018	.015	
3.0	.198	.147	.105	.170	.126	.091	.117	.088	.064	.067	.051	.038	.022	.017	.012	
4.0	.191	.133	.090	.163	.115	.078	.112	.080	.055	.065	.047	.033	.021	.015	.011	
5.0	.183	.123	.079	.157	.107	.069	.108	.074	.049	.063	.044	.029	.020	.014	.010	
6.0	.176	.115	.071	.151	.100	.062	.104	.070	.044	.060	.041	.026	.019	.013	.009	
7.0	.169	.108	.066	.145	.094	.057	.100	.066	.041	.058	.039	.024	.019	.013	.008	
8.0	.162	.102	.061	.140	.089	.053	.097	.062	.038	.056	.037	.023	.018	.012	.007	
9.0	.156	.097	.058	.134	.085	.050	.093	.059	.036	.054	.035	.021	.018	.012	.007	
10.0	.150	.093	.055	.130	.081	.048	.090	.057	.034	.052	.034	.020	.017	.011	.007	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:RD
Test Date:2023-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.70V I:0.1451A P:30.760W PF:0.9188 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3896.99x1 lm										
NAME: SLB-40W-CC					TYPE: 30W			WEIGHT:		
SPEC.: 5700K					DIM.:			SERIAL No.: UP-IES4-R&D		
MFR.:					SUR.: 0.0756			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.1	23.6	22.4	23.9	24.2	21.8	23.3	22.1	23.6	23.9
3H	24.0	25.4	24.3	25.7	26.0	23.3	24.7	23.6	25.0	25.3
4H	24.9	26.2	25.3	26.6	26.9	23.8	25.1	24.2	25.5	25.8
6H	25.9	27.2	26.3	27.5	27.9	24.2	25.4	24.6	25.8	26.2
8H	26.5	27.7	26.9	28.0	28.4	24.3	25.5	24.7	25.8	26.2
12H	27.1	28.2	27.5	28.6	29.0	24.3	25.5	24.7	25.8	26.2
4H 2H	22.7	24.0	23.1	24.3	24.7	22.5	23.8	22.8	24.1	24.4
3H	24.8	25.9	25.2	26.3	26.7	24.2	25.3	24.6	25.7	26.1
4H	25.9	26.9	26.3	27.3	27.7	24.9	25.9	25.3	26.3	26.7
6H	27.0	28.0	27.5	28.4	28.9	25.4	26.3	25.8	26.7	27.2
8H	27.7	28.6	28.2	29.0	29.5	25.5	26.4	26.0	26.9	27.3
12H	28.4	29.2	28.9	29.7	30.2	25.6	26.4	26.1	26.9	27.4
8H 4H	26.2	27.0	26.6	27.5	28.0	25.3	26.2	25.8	26.6	27.1
6H	27.5	28.3	28.0	28.8	29.3	26.0	26.7	26.5	27.2	27.7
8H	28.3	29.0	28.9	29.5	30.0	26.3	26.9	26.8	27.4	28.0
12H	29.3	29.8	29.8	30.3	30.9	26.5	27.0	27.0	27.6	28.1
12H 4H	26.2	27.0	26.7	27.4	27.9	25.4	26.2	25.9	26.6	27.1
6H	27.6	28.3	28.1	28.8	29.3	26.2	26.8	26.7	27.3	27.9
8H	28.5	29.0	29.0	29.6	30.1	26.5	27.1	27.1	27.6	28.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 3897 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 4.7$)
Area: 0.0756 m²

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:RD
Test Date:2023-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.70V I:0.1451A P:30.760W PF:0.9188 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3896.99x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	55	43	36	54	43	36	53	43	36	29
0.80	65	53	45	64	52	45	62	52	45	38
1.00	73	62	54	72	61	54	69	62	53	45
1.25	80	69	62	79	68	61	75	67	60	52
1.50	85	75	67	83	74	67	80	72	65	57
2.00	92	83	76	90	81	75	86	79	73	64
2.50	96	88	81	94	86	80	89	83	78	68
3.00	100	92	86	97	90	85	92	87	82	72
4.00	104	97	92	101	95	90	96	91	87	77
5.00	106	101	96	103	99	94	98	94	91	80
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:RD
Test Date:2023-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.70V I:0.1451A P:30.760W PF:0.9188 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3896.99x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:

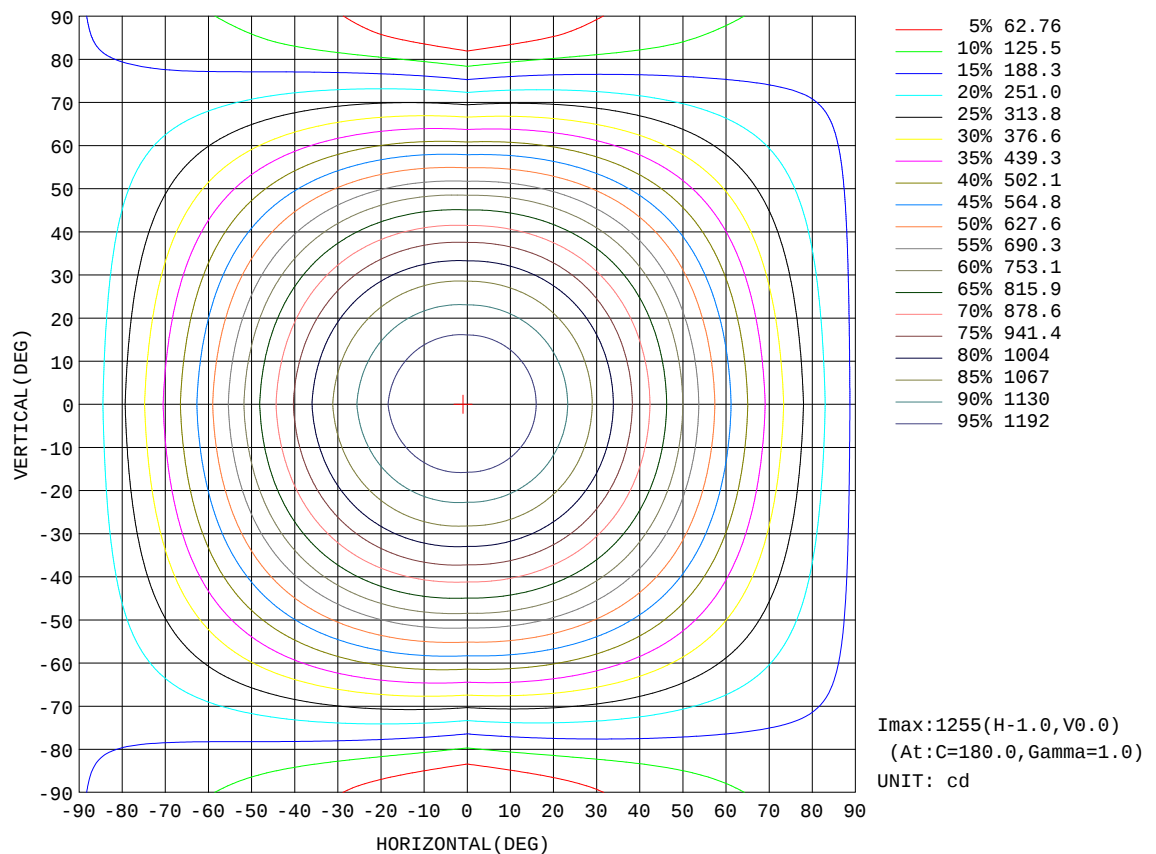


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:RD
Test Date:2023-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.70V I:0.1451A P:30.760W PF:0.9188 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3896.99x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:

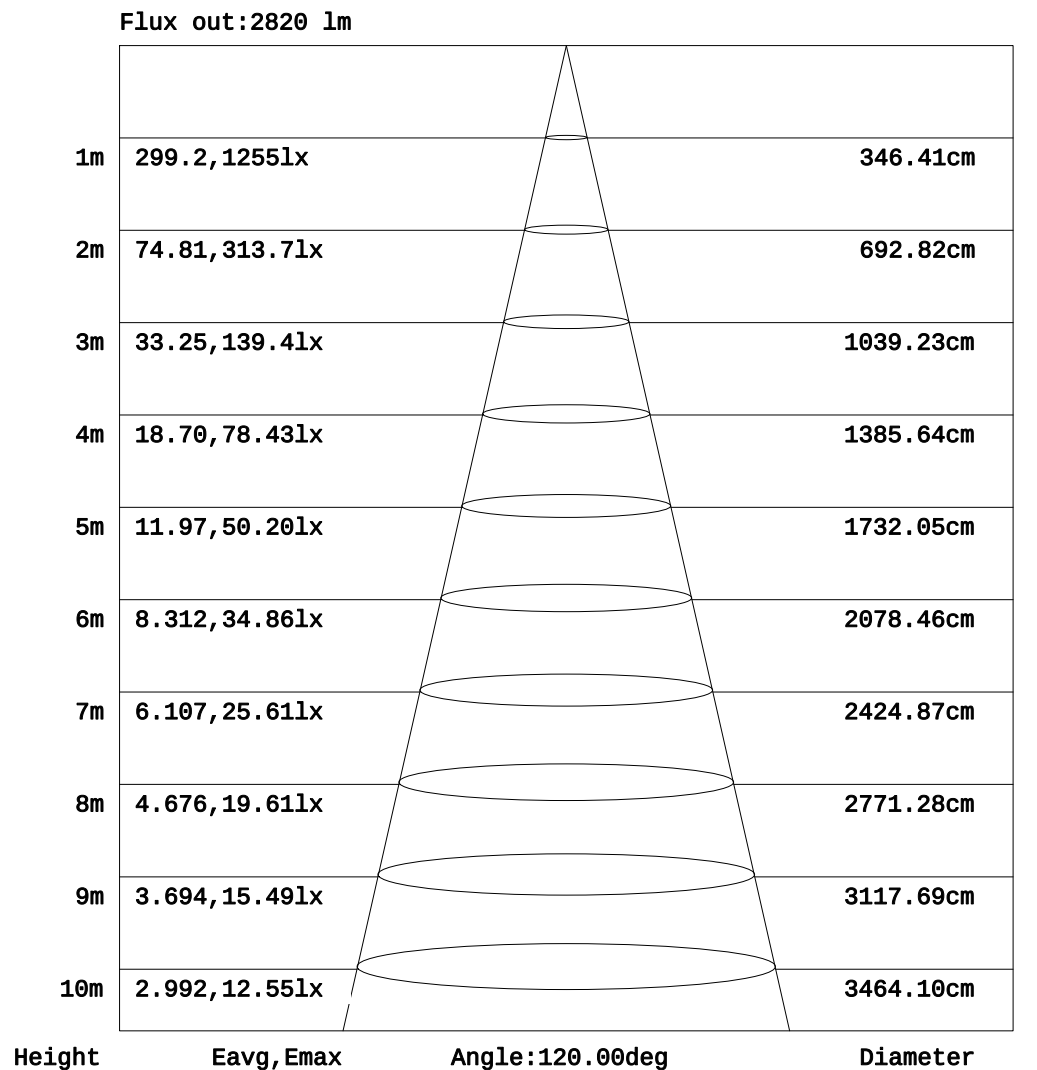


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:RD
Test Date:2023-10-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.70V I:0.1451A P:30.760W PF:0.9188 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3896.99x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:

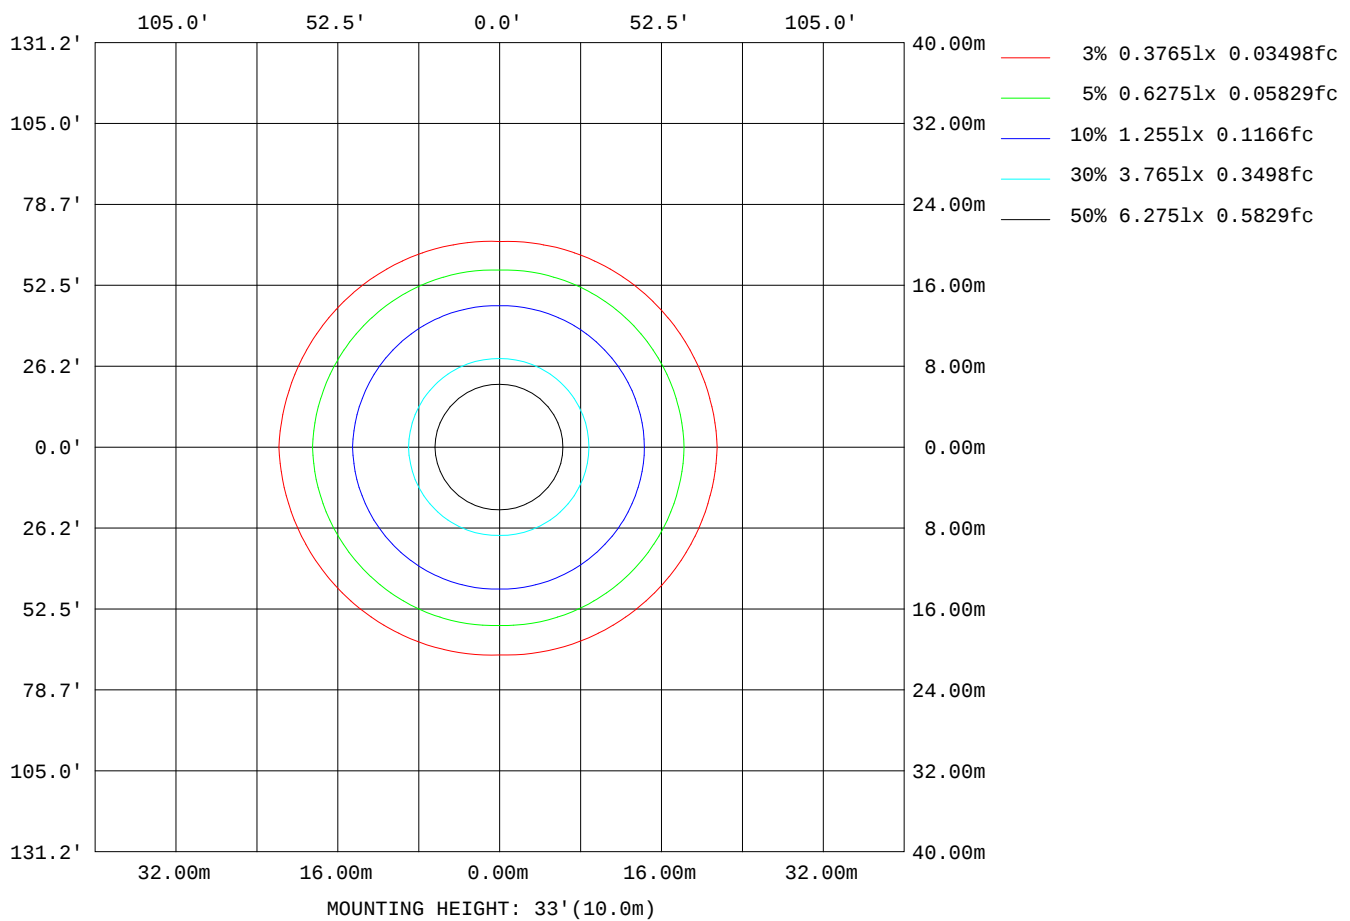

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: RD
Test Date: 2023-10-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.70V I:0.1451A P:30.760W PF:0.9188 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3896.99x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	16098
L_0~180(75)av	18580
L_0~180(85)av	35873
L_90~270(65)av	13137
L_90~270(75)av	10508
L_90~270(85)av	4775
L_45(65)av	14271
L_45(75)av	13570
L_45(85)av	16525

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:RD
Test Date:2023-10-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

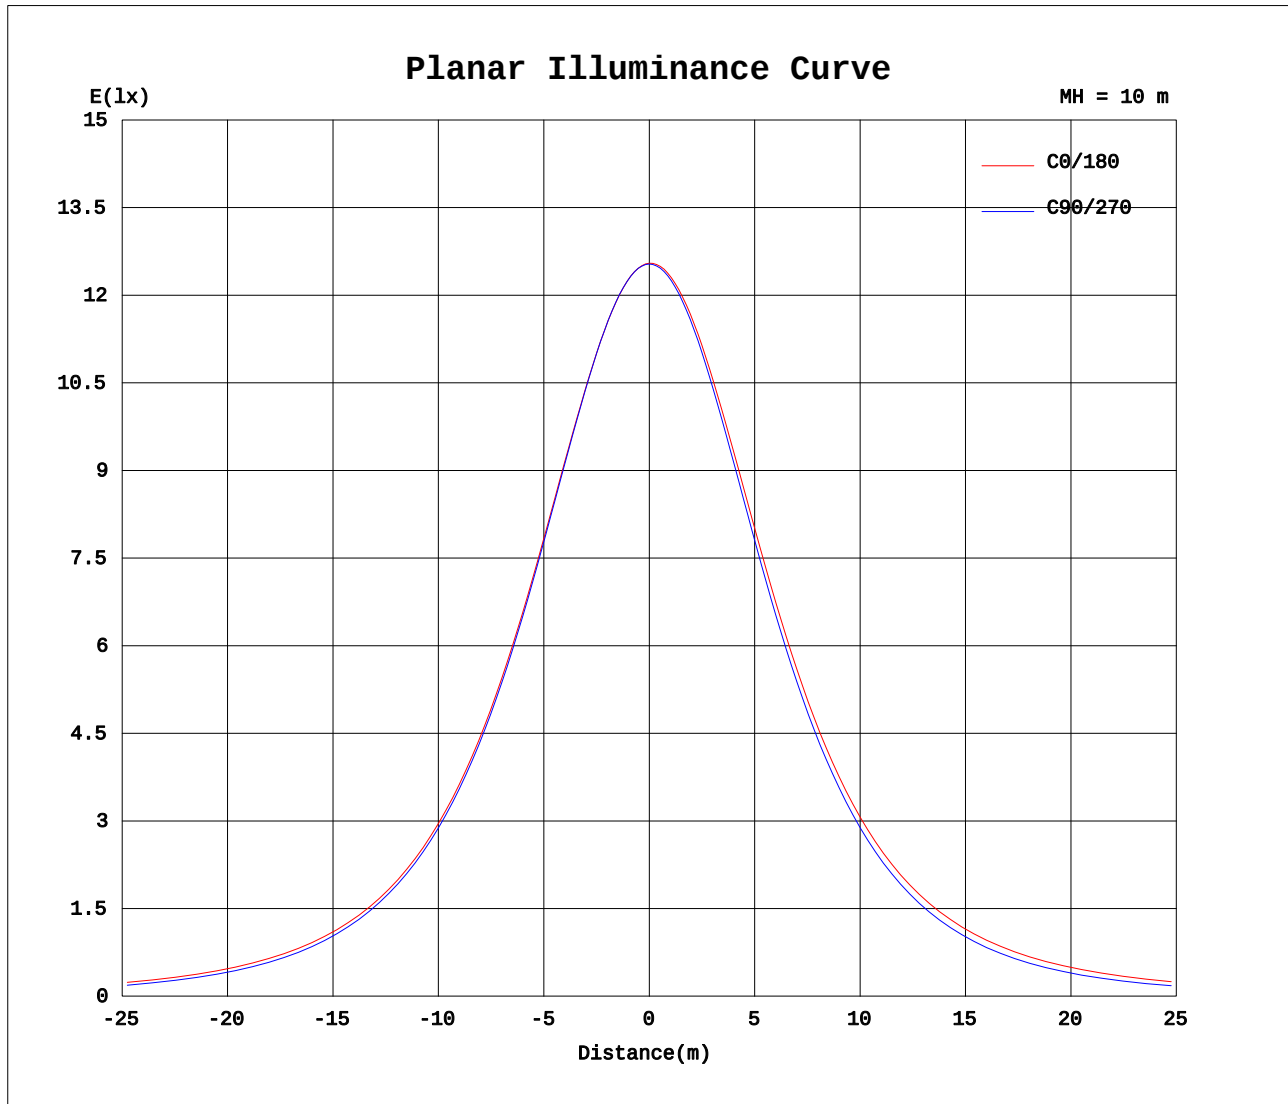

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: RD
Test Date: 2023-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.70V I:0.1451A P:30.760W PF:0.9188 Freq:49.90Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3896.99x1 lm		
NAME: SLB-40W-CC	TYPE: 30W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.: UP-IES4-R&D
MFR.:	SUR.: 0.0756	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	90	180	270															
0	1254	1254	1254	1254															
5	1246	1248	1252	1248															
10	1228	1229	1238	1230															
15	1198	1199	1214	1201															
20	1160	1158	1179	1160															
25	1111	1106	1135	1109															
30	1054	1045	1081	1049															
35	988	976	1017	979															
40	915	899	946	903															
45	836	815	867	817															
50	753	726	783	724															
55	668	631	697	624															
60	584	532	610	519															
65	502	429	526	411															
70	425	321	447	301															
75	353	217	374	194															
80	287	120	305	95.0															
85	228	41.0	245	21.9															
90	175	1.89	192	2.09															
95	129	1.81	146	2.26															
100	91.5	2.47	107	2.95															
105	61.2	3.17	74.6	3.67															
110	38.4	3.91	49.5	4.43															
115	23.0	4.67	31.5	5.19															
120	14.0	5.43	19.3	5.97															
125	9.85	6.24	12.3	6.77															
130	7.37	7.02	8.25	7.54															
135	7.95	7.81	8.20	8.29															
140	8.62	8.59	8.83	9.00															
145	9.24	9.27	9.49	9.63															
150	9.84	9.92	10.1	10.2															
155	10.5	10.5	10.6	10.7															
160	11.0	11.0	11.1	11.1															
165	11.5	11.4	11.6	11.5															
170	12.0	11.8	12.0	11.8															
175	12.3	12.0	12.3	12.0															
180	12.4	12.1	12.4	12.1															

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:RD
Test Date:2023-10-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks: