



POWER-LITE®

ONLINE LIGHTING & ELECTRICAL ACCESSORIES



LED

BATTEN

E-B20W-CC, E-B40W-CC, E-B40W-CC-MS

The POWER-LITE® LED Batten is a premium grade internal batten designed to create excellent light levels for commercial, education and healthcare applications. This range comes in emergency and sensor options.



APPLICATIONS

Office

Healthcare

Retail

Commercial



☎ 1800 909 306
🌐 nedlandsgroup.com.au
✉ sales@nedlandsgroup.com.au



POWER-LITE®

ONLINE LIGHTING & ELECTRICAL ACCESSORIES

DIMENSIONS


(L x W x H mm)

E-B20W-CC

603 x 68.5 x 64


E-B40W-CC

1203 x 71 x 64

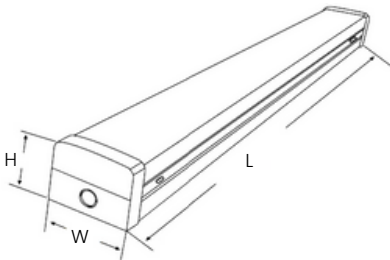

SENSOR FACTORY SETTINGS

Detection Area	Hold Time	Daylight Sensor
100%	5S	Disable

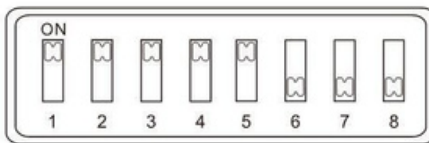

LED Chip
Epistar SMD

Efficacy
Up to 119lm/W

Life Expectancy
50,000 hrs TM-21

Cable Entry
Rear or end entry

Working Temp
-20°C to +45°C

LED Driver
Non-dimmable
Built In

CRI
80

Connection
Hardwire

SCDM
<6 MacAdam Steps

Carton Qty
12

Power Factor
0.9

20W
40W

3CCT

AC200-240V

White Frame
Colour

PRODUCT

SPECIFICATIONS

CODE

LED BATTEN

20W
 Replaces 36W
Fluorescent

3000K
1827lm
 4000K
2068lm
 5700K
1961lm

E-B20W-CC

40W
 Replaces 72W
Fluorescent

3000K
4079lm
 4000K
4487lm
 5700K
4167lm

E-B40W-CC/
E-B40W-CC-MS
(Sensor Version)

IP20

IK08

120°
Beam Angle




POWER-LITE®


ONLINE LIGHTING & ELECTRICAL ACCESSORIES

PHOTOMETRICS


E-B20W-CC | 3000K

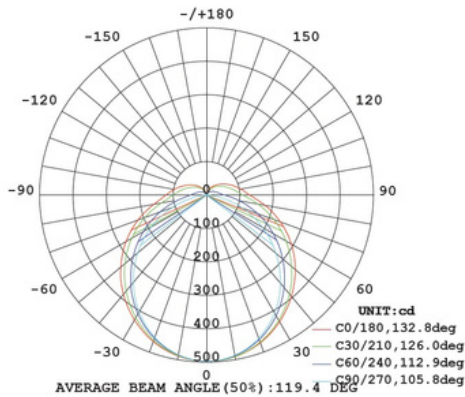


E-B20W-CC | 4000K

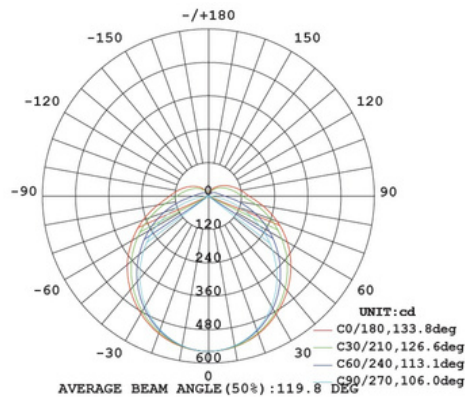


E-B20W-CC | 5700K

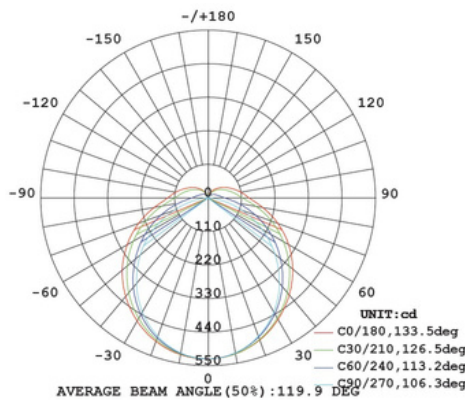

E-B40W-CC | 3000K

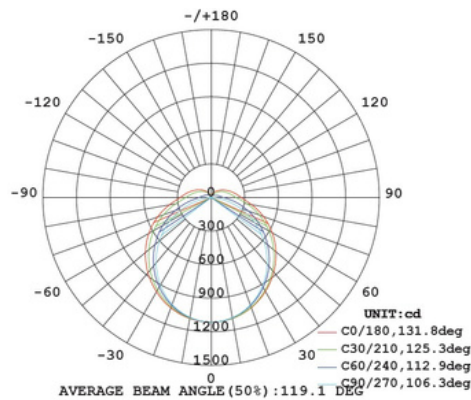

E-B40W-CC | 4000K

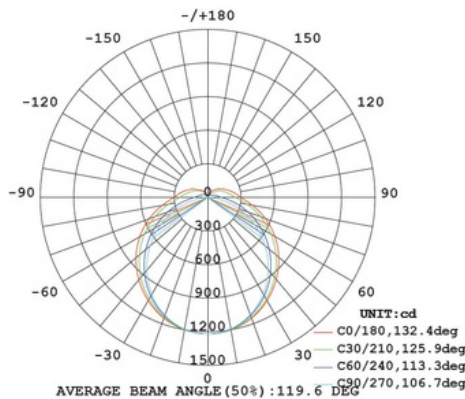

E-B40W-CC | 5700K

