




# POWER-LITE®

Certainty at The Speed of Light

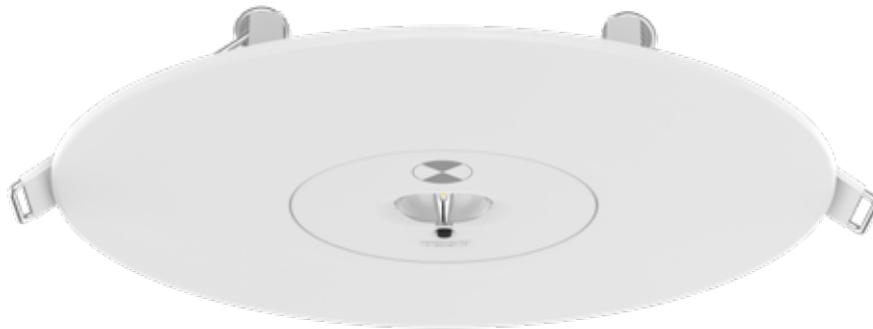

## LED EMERGENCY

**LIGHT**

LED3W-ENM-W

The POWER-LITE® LED Recessed Emergency Light can be easily installed due to its recessed and compact design. High in power and LED efficient provides a premium emergency solution for open area applications.



APPLICATIONS  
Commercial  
Retail | Industrial  
Multi-residential




☎ 1800 909 306  
🌐 [nedlandsgroup.com.au](http://nedlandsgroup.com.au)  
✉ [sales@nedlandsgroup.com.au](mailto:sales@nedlandsgroup.com.au)



# POWER-LITE®

Certainty at The Speed of Light

## DIMENSIONS (mm)

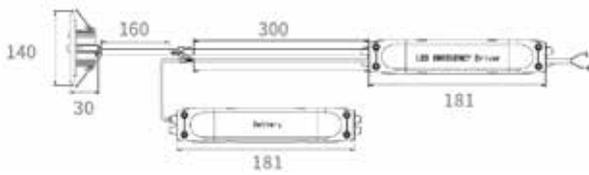

Cut-out: 42-50mm  
140mm ring cut-out: 85-105mm

## Notes:

- Includes 140mm retrofit ring

LED Chip  
SMD 3535

Working Temp.  
0°C to +45°C

Protection Class  
Class II

Classification  
AS2293:  
C0:D63 / C90:D63

CRI  
>70

Battery Type  
6.4V 1500mAh  
LiFePO4

Connection  
1.5m wire with SAA plug

Emergency Duration  
120 mins

Emergency Watt Output  
3W Max

Emergency LM Output  
280lm

Emergency Mode  
Non-Maintained


Emergency Classification  
C0:A50, C90:E63

Material  
Aluminium & PC

Carton Qty  
6

## SPACING TABLE

Maximum spacings between luminaires for 0.2 lux (Australia)



MOUNTING HEIGHT (m)	2.4	2.7	3.0	3.3	3.6	4.0
A	13.2	14.8	16.5	18.1	19.8	22.0
B	13.2	14.8	16.5	18.1	19.8	22.0

As per AS/NZS 2293:2018



3W



5000K



AC200-240V  
50/60Hz



White



IP20

## PRODUCT

LED EMERGENCY LIGHT  
Product includes self-test function. Please refer to installation manual for details.

## CODE

LED3W-ENM-W

## ACCESSORIES

SURFACE MOUNT BOX



## CODE

ENM-SMB-W



1800 909 306

nedlandsgroup.com.au

sales@nedlandsgroup.com.au