



POWER-LITE®

Certainty at The Speed of Light



LED

BATTEN

E-B20W-CC, E-B40W-CC, E-B40W-CC-E

The POWER-LITE® LED Batten is a premium grade internal batten designed to create excellent light levels for commercial, education and healthcare applications. This batten includes the elimination of UV therefore insects will not be attracted to this light.



APPLICATIONS

Office
Healthcare
Retail
Commercial



☎ 1800 909 306
🌐 nedlandsgroup.com.au
✉ sales@nedlandsgroup.com.au




POWER-LITE®

Certainty at The Speed of Light


DIMENSIONS (L x W x H mm)

E-B20W-CC	603 x 68.5 x 64
E-B40W-CC	1203 x 71 x 64

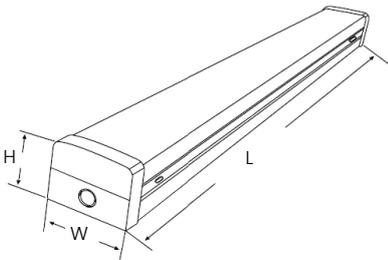

SENSOR FACTORY SETTINGS

Detection Area	Hold Time	Daylight Sensor
100%	5S	Disable

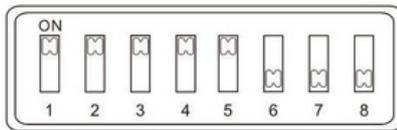

DIP	1	2	3	4	5	6	7	8
Detection Area	ON	ON	100%	ON	ON	ON	5S	ON
Hold Time	ON	ON	75%	ON	ON	30S	ON	ON
Daylight Sensor	ON	-	50%	ON	-	30S	-	ON
	-	-	25%	-	-	30min	-	-
	-	-	-	-	-	30min	-	Disable

LED Chip
Epistar SMD

Efficacy
Up to 119lm/W

Life Expectancy
50,000 hrs TM-21

Cable Entry
Rear or end entry

Working Temp
-20°C to +45°C

LED Driver
Non-dimmable
Built In

CRI
80

Connection
Hardwire

SCDM
<6 MacAdam Steps

Carton Qty
12

Power Factor
0.9

20W
40W

3CCT

AC200-240V

White Frame
Colour

PRODUCT

SPECIFICATIONS

CODE

LED BATTEN

20W

Replaces 36W
Fluorescent

3000K
1827lm

4000K
2068lm

5700K
1961lm

E-B20W-CC

40W

Replaces 72W
Fluorescent

3000K
4079lm

4000K
4487lm

5700K
4167lm

E-B40W-CC

E-B40W-CC-MS
(Microwave Sensor)

LED 3W EMERGENCY BATTEN

EM Mode
291-306lm

EM Watt Output
3W

EM Classification
C0:D80, C90:C80

3000K
291lm

4000K
301lm

5700K
306lm

E-B40W-CC-E

IP20

IK08

120°
Beam Angle




POWER-LITE®


Certainty at The Speed of Light

PHOTOMETRICS


E-B20W-CC | 3000K

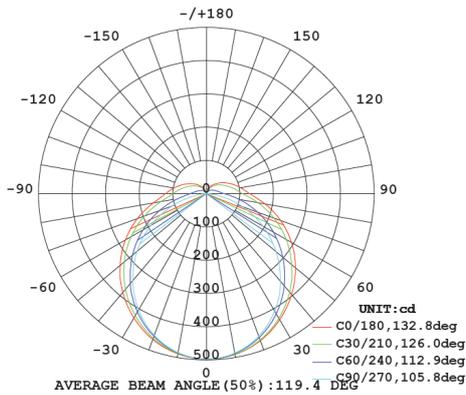


E-B20W-CC | 4000K

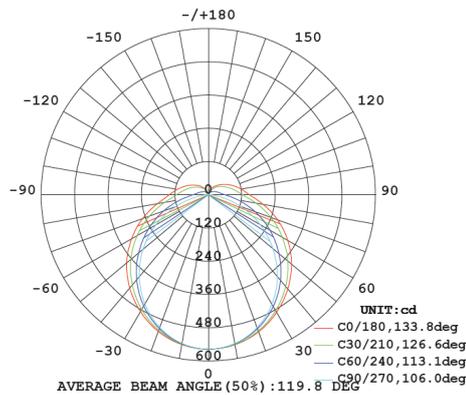


E-B20W-CC | 5700K

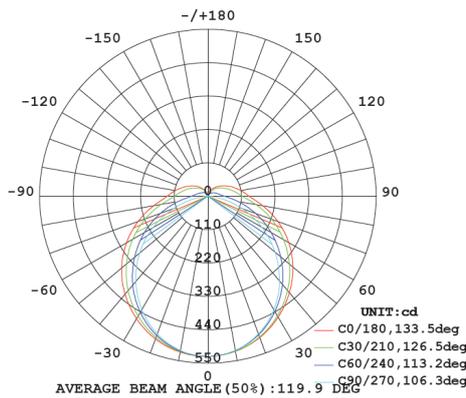


E-B40W-CC | 3000K

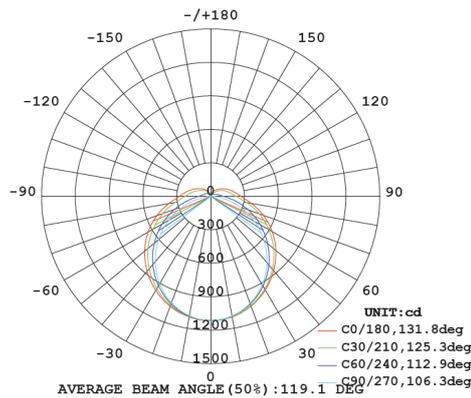

E-B40W-CC | 4000K

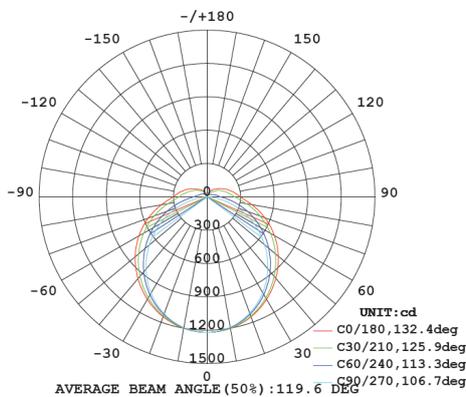

E-B40W-CC | 5700K

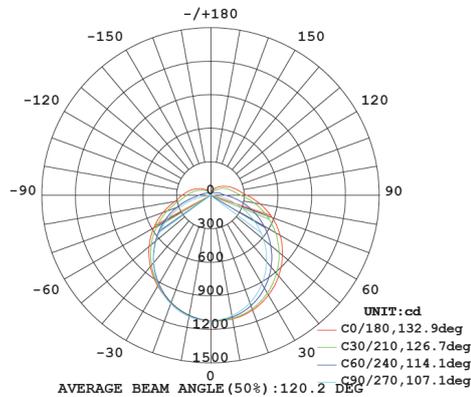




POWER-LITE®


Certainty at The Speed of Light

PHOTOMETRICS

E-B40W-CC-E | 3000K

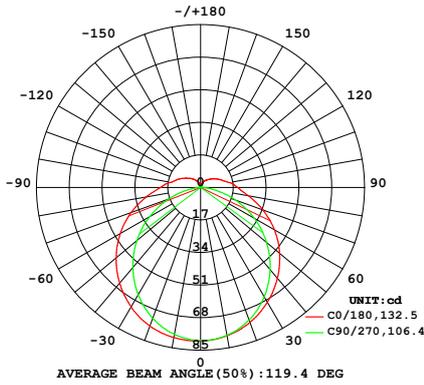

E-B40W-CC-E | 4000K

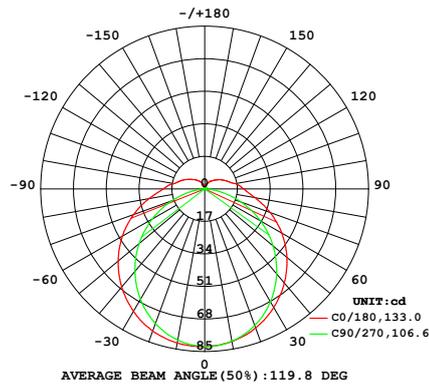

E-B40W-CC-E | 5700K

