


LED Bollard Light

Instruction Manual

| Packing List | | |
|---|----------------------|------|
|  | Base plate templates | 1PC |
|  | Screw fixing plate | 1PC |
|  | Screw M5x16 | 5PCS |
|  | Screw M8 | 3PCS |
|  | Nut M8 | 3PCS |






0.5m




0.9m




Physical Dimensions(mm/inch)

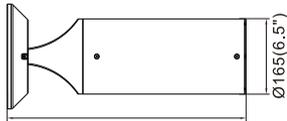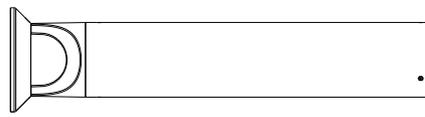


520(20.47")
0.5m

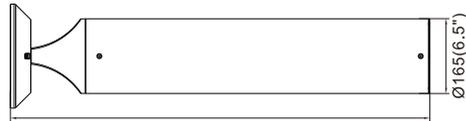


920(36.22")
0.9m




Ø230
(9.06")

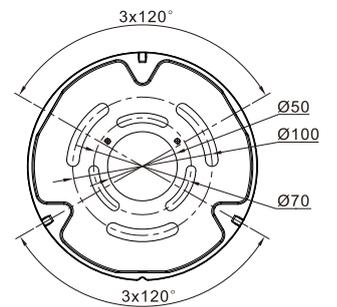



Installation

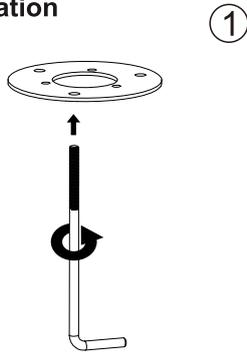

①

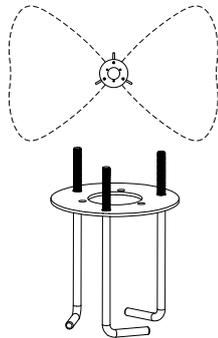


②

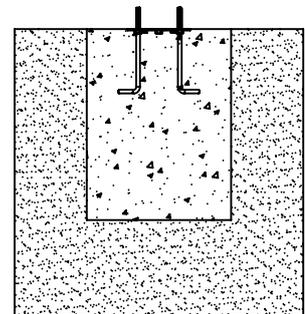
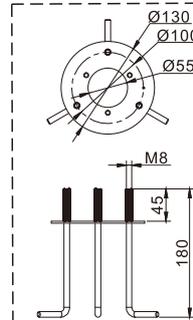


③



Suggested cement column size:

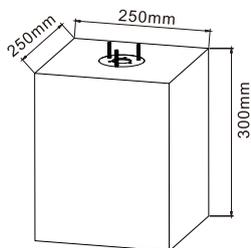


④

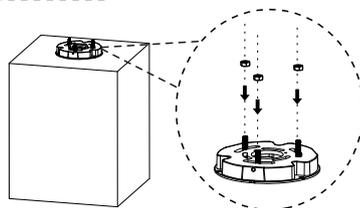

⑤

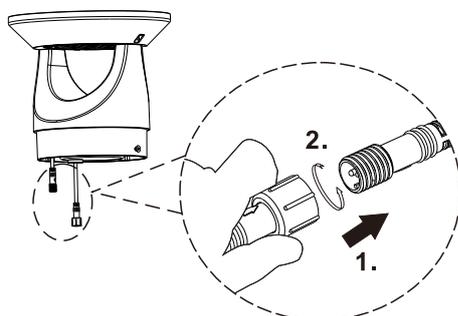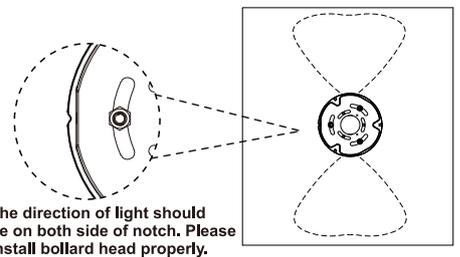

⑥

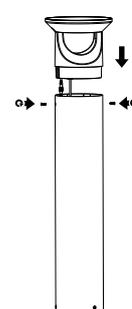


⑦




LED Bollard Light

Instruction Manual

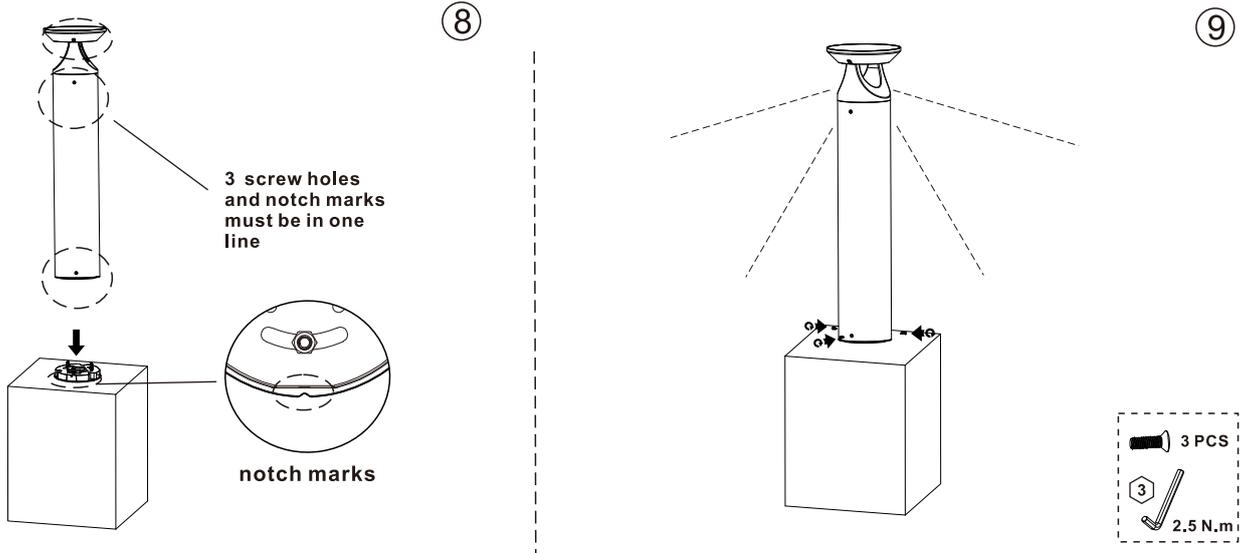

Five-stage Night Mode

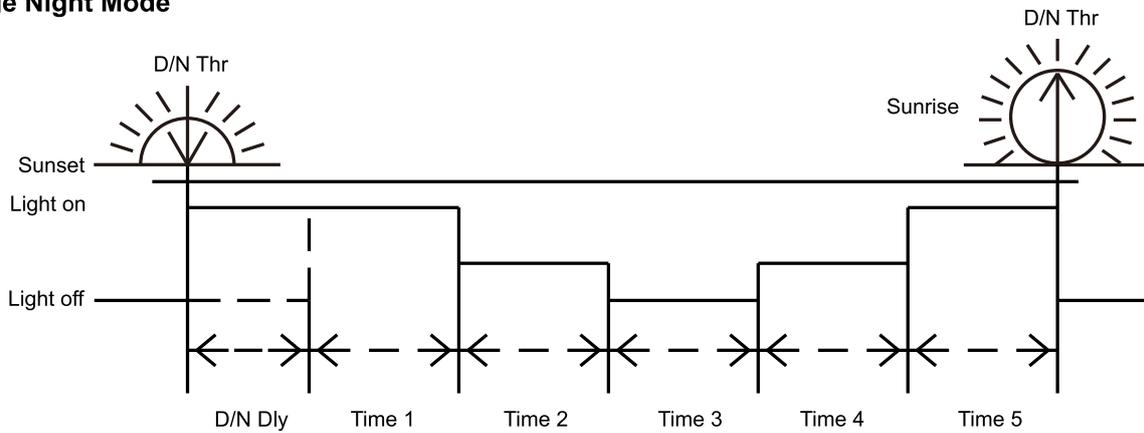

- * Set the modes Time 1-5 and lighting levels by remote control.
- * Avoid being shaded by trees and buildings, or battery charging will be affected.

* Recommended lighting settings

| Lighting scheme | Time 1 | Time 2 | Time 3 | Time 4 | Time 5 | Energy consumption | Working hours in rainy days |
|------------------------|---------|---------|---------|---------|---------|--------------------|-----------------------------|
| 1 (Factory default) | 6Hx30% | 0Hx100% | 0Hx100% | TOTx0% | 1Hx30% | 7.4Wh | 4-5 Days |
| 2 | 6Hx30% | 6Hx30% | 0Hx100% | 0Hx0% | 0Hx100% | 12.6Wh | 3-4 Days |
| 3 | 6Hx50% | 6Hx30% | 0Hx100% | 0Hx0% | 0Hx100% | 16.8Wh | 2-3 Days |
| 4 | 4Hx70% | 4Hx30% | 4Hx30% | 0Hx0% | 0Hx100% | 18.2Wh | 1-2 Days |
| 5 | 4Hx100% | 2Hx50% | 0Hx100% | 0Hx0% | 0Hx100% | 17.5Wh | 2-3 Days |
| 6 | 2Hx50% | 4Hx30% | 0Hx100% | TOTx20% | 1Hx30% | 12.3Wh | 3-4 Days |
| 7 | 4Hx80% | 2Hx30% | 0Hx100% | TOTx0% | 1Hx80% | 16.1Wh | 2-3 Days |

* The table of rainy days is for reference only, the actual working days is subject to the local sunshine conditions.

| Product Specifications | 3W | |
|------------------------|---------------------------------|---------------------------|
| Outlook Dimensions | Ø230x520mm(Ø9.06"x20.47") | Ø230x920mm(Ø9.06"x36.22") |
| Net Weight | 5.1±0.3kg(11.24±0.66Lbs) | 6.6±0.3kg(14.55±0.66Lbs) |
| Working Temperature | 0°C to + 50°C(32°F to +122°F) | |
| Storing Temperature | -10°C to + 50°C(14°F to +122°F) | |

- For other than portable PV luminaire systems, the installation shall recommend that installation be performed by an appropriately qualified professional, and that the installation shall comply with any local rules and regulations
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.