
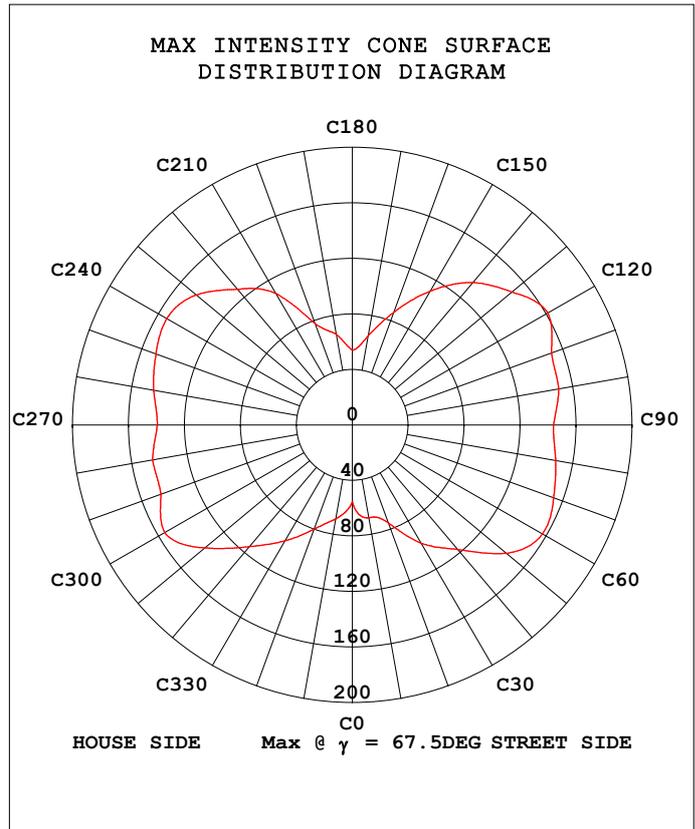


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:2.8780V I:1.1000A P:3.1659W PF:1.0000 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.35x1 lm		
NAME: BL04-003-4080-R03201	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 109.71 lm/W			
MODEL	/	I _{max} (cd)	161.5	η street_up (%)	0.0
NOMINAL POWER (W)	/	LOR (%)	100.0	η street_down (%)	50.6
RATED VOLTAGE (V)	/	TOTAL FLUX (lm)	347.3	η house_up (%)	0.0
NOMINAL FLUX (lm)	347.35	MAXIMUM @ (C, γ)	120,67.5	η house_down (%)	49.4
LAMPS INSIDE	1	η up (%)	0.0	76 FLASHAREA (m2)	
TEST VOLTAGE (V)	/	η down (%)	100.0	SLI	

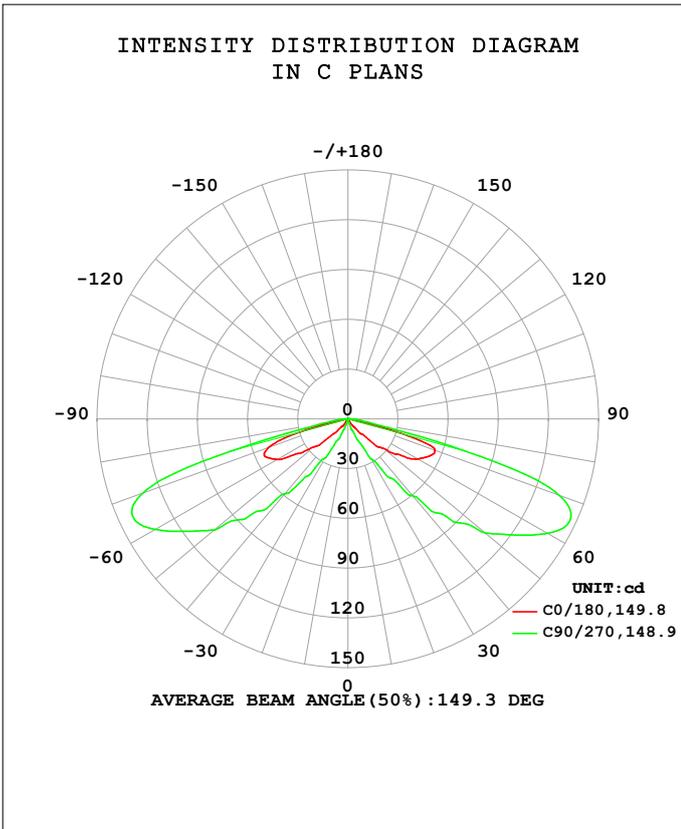


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: LYJ
 Test Date: 2021-10-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 1.900m [K=0.6108]
 Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:2.8780V I:1.1000A P:3.1659W PF:1.0000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.35x1 lm		
NAME: BL04-003-4080-R03201	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

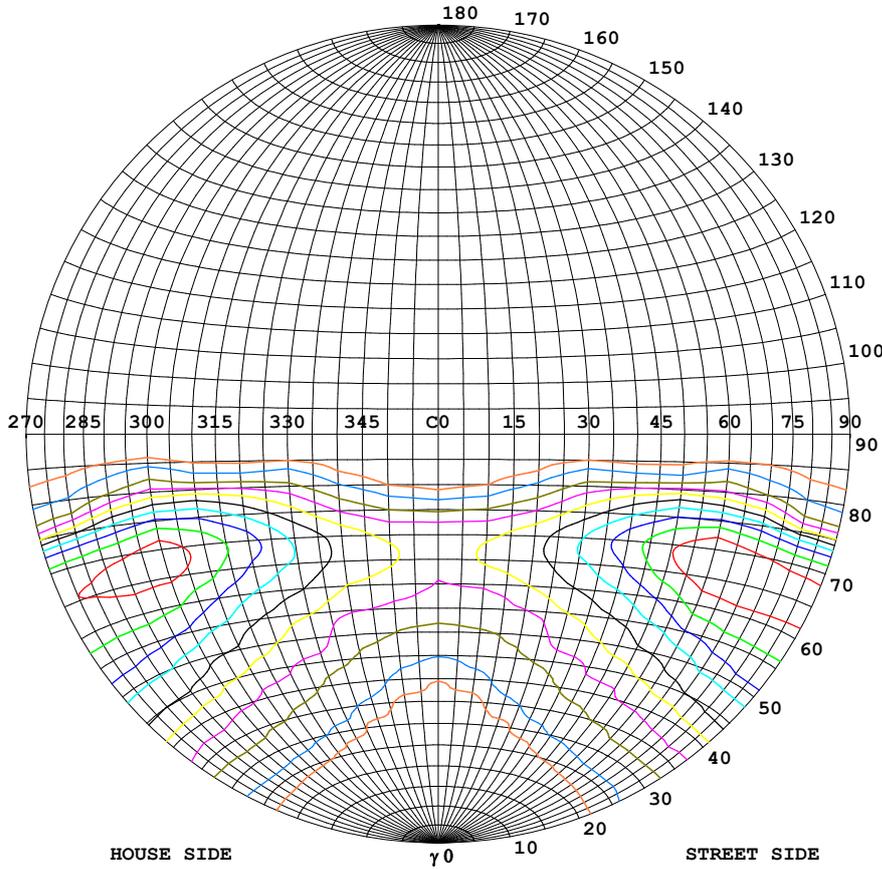

Classification:



IES:Type IV - Short
 CIE:Broad - Intermediate
 IES:Semi cut-off
 CIE:Non-cut-off
 Max.At80:178.1cd/klm
 Max.At90:0cd/klm
 Max.80-90:178.1cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	161
90%	145
80%	129
70%	113
60%	97
50%	81
40%	65
30%	48
20%	32
10%	16
5%	8

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:LYJ
 Test Date:2021-10-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:1.900m [K=0.6108]
 Remarks:

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

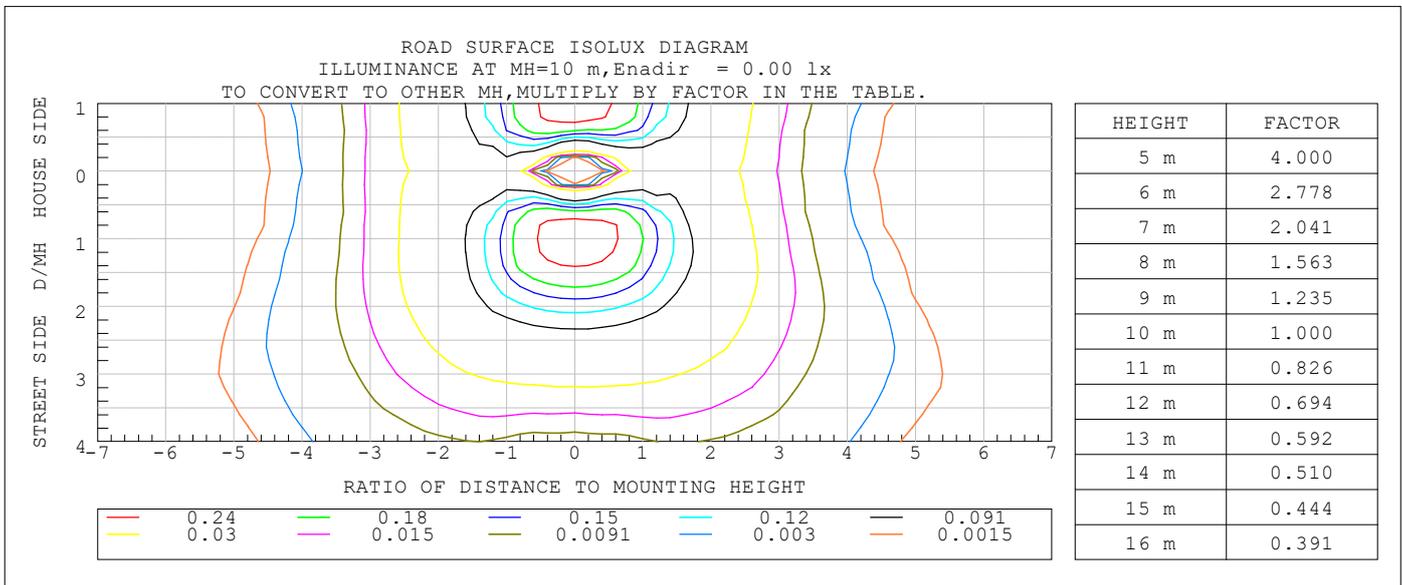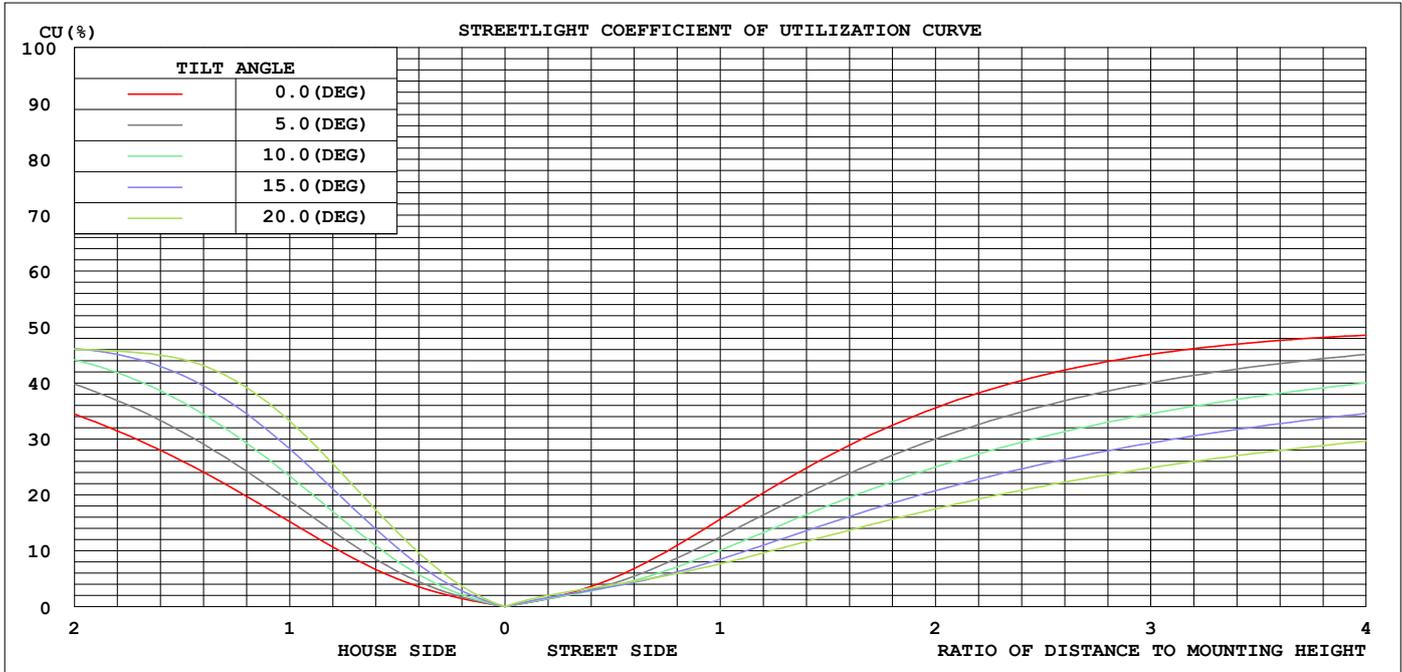

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: LYJ
Test Date: 2021-10-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 1.900m [K=0.6108]
Remarks:

ZONAL FLUX DIAGRAM

Test:U:2.8780V I:1.1000A P:3.1659W PF:1.0000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.35x1 lm		
NAME: BL04-003-4080-R03201	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	0.0053	0.0275	0.0929	0.0210	0.0057	0.0159	0.0730	0.0208	0- 10	0.0010	0.0010	0.00,0.00
20	0.0567	2.868	7.240	2.114	0.0288	1.918	6.552	2.578	10- 20	0.2426	0.2437	0.07,0.07
30	0.7445	18.27	28.14	16.76	0.5164	14.53	27.18	17.88	20- 30	3.827	4.071	1.17,1.17
40	10.06	42.35	60.70	41.94	6.624	38.34	59.17	41.71	30- 40	16.72	20.79	5.99,5.99
50	27.63	70.58	107.1	76.95	26.12	71.61	104.1	70.39	40- 50	42.06	62.86	18.1,18.1
60	48.36	103.9	137.9	114.2	48.96	108.5	133.2	101.6	50- 60	77.25	140.1	40.3,40.3
70	55.36	131.2	134.4	142.3	50.36	138.8	130.5	126.3	60- 70	113.6	253.7	73,73
80	6.223	49.02	12.14	57.27	6.270	59.51	13.57	48.62	70- 80	82.94	336.7	96.9,96.9
90	0	0	0	0	0	0	0	0	80- 90	10.68	347.3	100,100
100	0	0	0	0	0	0	0	0	90-100	0	347.3	100,100
110	0	0	0	0	0	0	0	0	100-110	0	347.3	100,100
120	0	0	0	0	0	0	0	0	110-120	0	347.3	100,100
130	0	0	0	0	0	0	0	0	120-130	0	347.3	100,100
140	0	0	0	0	0	0	0	0	130-140	0	347.3	100,100
150	0	0	0	0	0	0	0	0	140-150	0	347.3	100,100
160	0	0	0	0	0	0	0	0	150-160	0	347.3	100,100
170	0	0	0	0	0	0	0	0	160-170	0	347.3	100,100
180	0	0	0	0	0	0	0	0	170-180	0	347.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:LYJ
 Test Date:2021-10-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:1.900m [K=0.6108]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:2.8780V I:1.1000A P:3.1659W PF:1.0000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.35x1 lm		
NAME: BL04-003-4080-R03201	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

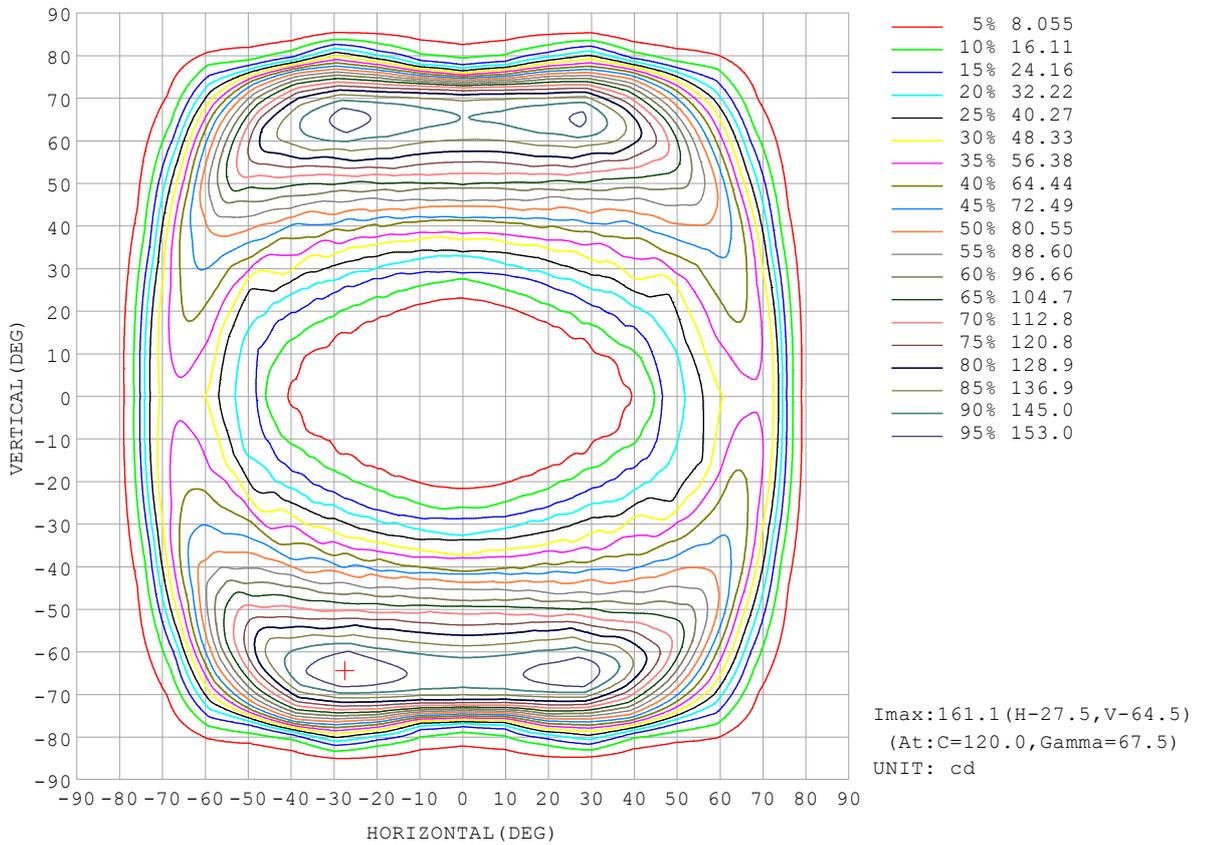

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:LYJ
 Test Date:2021-10-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:1.900m [K=0.6108]
 Remarks:

Planar Illuminance Curve

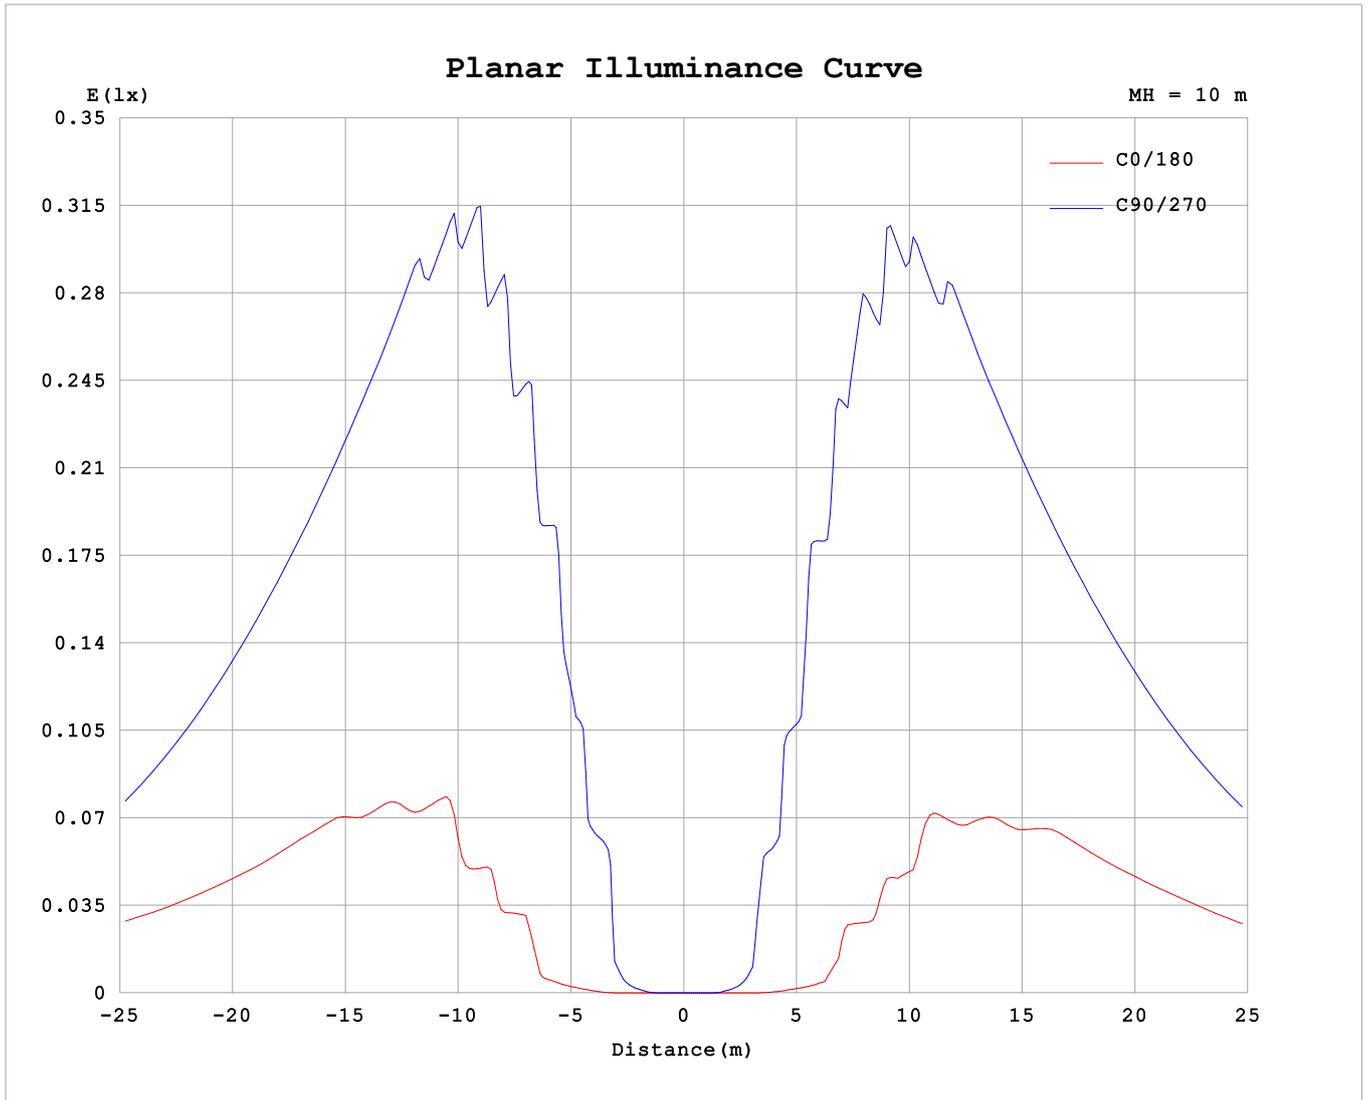


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: LYJ
Test Date: 2021-10-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 1.900m [K=0.6108]
Remarks:

LCS REPORT

Test:U:2.8780V I:1.1000A P:3.1659W PF:1.0000 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.35x1 lm		
NAME: BL04-003-4080-R03201	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

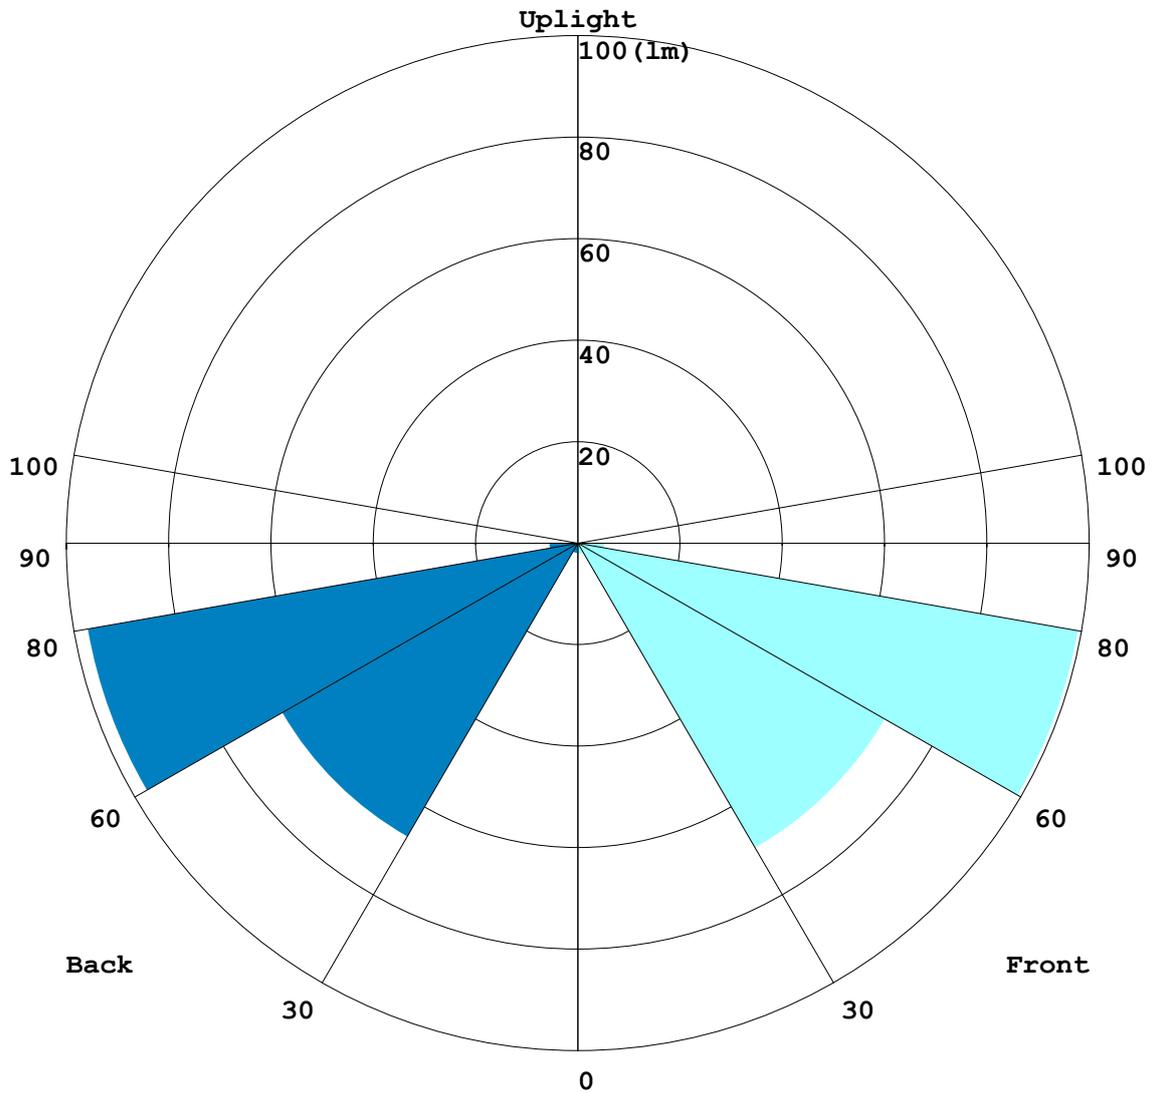

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:LYJ
 Test Date:2021-10-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:1.900m [K=0.6108]
 Remarks:

BUG REPORT

Test:U:2.8780V I:1.1000A P:3.1659W PF:1.0000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.35x1 lm		
NAME: BL04-003-4080-R03201	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	2.1334	0.6
FM - Front-Medium(30-60)	69.284	19.9
FH - Front-High(60-80)	99.283	28.6
FVH - Front-Very High(80-90)	5.1681	1.5
Total Forward Light	175.87	50.6

BL - Back-Low(0-30)	1.9375	0.6
BM - Back-Medium(30-60)	66.754	19.2
BH - Back-High(60-80)	97.279	28.0
BVH - Back-Very High(80-90)	5.5101	1.6
Total Back Light	171.48	49.4

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B0-U0-G0
----------------------------------	-----------------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	171.48	0	171.48
Street Side	175.87	0	175.87


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:LYJ
 Test Date:2021-10-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:1.900m [K=0.6108]
 Remarks:

ROAD ISOCANDELA REPORT

Test:U:2.8780V I:1.1000A P:3.1659W PF:1.0000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.35x1 lm		
NAME: BL04-003-4080-R03201	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

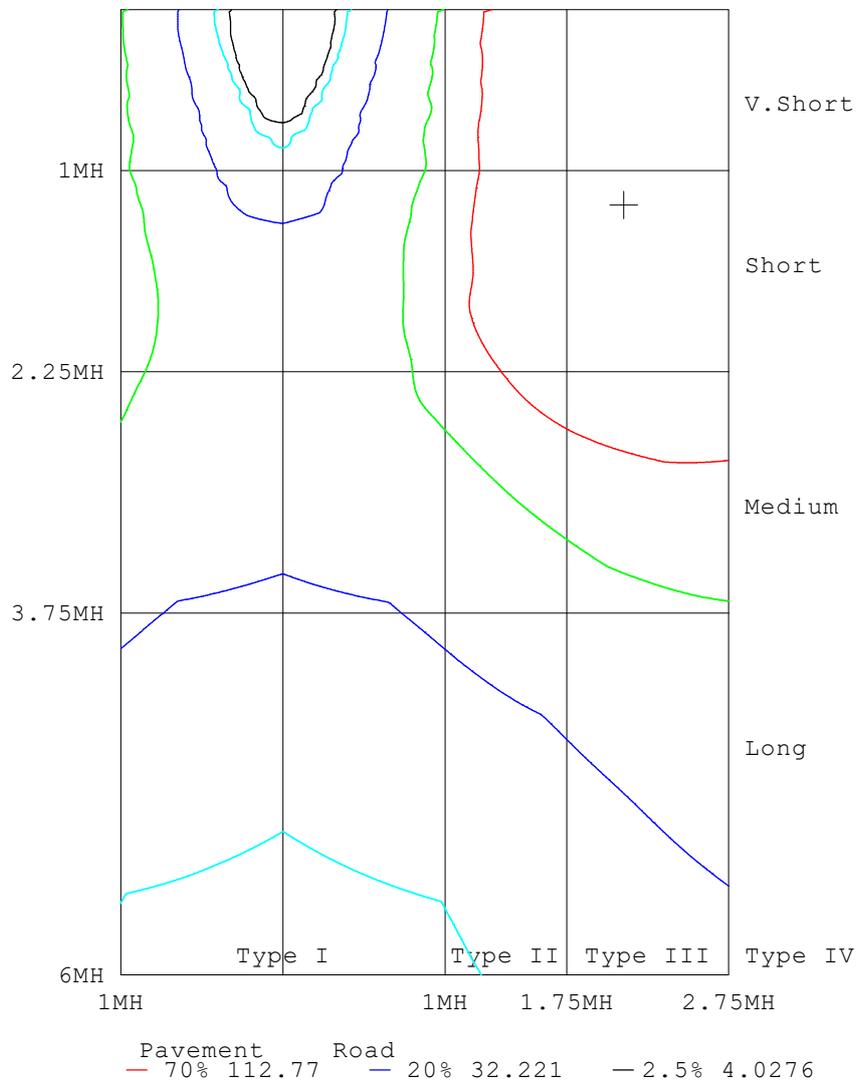

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:LYJ
 Test Date:2021-10-27

— 50% 80.553 — 5% 8.0553

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:1.900m [K=0.6108]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:2.8780V I:1.1000A P:3.1659W PF:1.0000 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.35x1 lm		
NAME: BL04-003-4080-R03201	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
5	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
10	0.01	0.01	0.01	0.01	0.02	0.03	0.06	0.08	0.10	0.09	0.09	0.07	0.05	0.03	0.02	0.01	0.01	0.01	0.01
15	0.01	0.02	0.05	0.14	0.23	0.32	0.43	0.53	0.62	0.60	0.60	0.47	0.39	0.28	0.19	0.10	0.04	0.01	0.01
20	0.06	0.13	0.29	0.92	2.48	3.26	6.00	7.06	7.30	7.24	7.41	7.00	5.52	2.90	1.33	0.46	0.25	0.10	0.03
25	0.27	0.44	2.70	4.47	7.70	10.1	11.0	13.5	14.5	14.4	14.7	13.1	10.9	9.26	7.58	3.42	2.30	0.34	0.18
30	0.74	3.11	5.76	10.8	16.6	20.0	21.9	24.6	28.4	28.1	28.8	22.3	20.6	18.7	14.9	10.8	6.05	2.91	0.52
35	5.74	6.23	11.5	20.3	25.4	33.2	36.2	39.7	43.7	43.3	44.9	38.2	36.1	30.7	23.4	19.1	12.4	6.25	3.80
40	10.06	12.2	21.0	27.5	38.6	46.1	52.8	59.8	61.1	60.7	62.7	60.2	53.8	46.3	37.7	26.3	21.6	12.7	6.62
45	17.8	20.4	28.3	38.6	49.3	61.0	68.4	79.3	81.8	83.0	84.0	80.8	73.9	65.4	51.0	42.0	29.3	20.5	14.0
50	27.6	30.8	36.3	53.6	63.1	78.2	84.5	98.4	105	107	108	98.5	93.8	84.4	69.6	56.9	41.5	30.3	26.1
55	37.8	36.8	47.2	64.4	77.2	93.2	109	121	123	122	126	121	117	101	87.3	73.5	61.2	43.8	36.4
60	48.4	52.7	63.6	79.9	93.1	115	133	139	140	138	142	138	138	122	107	90.0	73.5	58.0	49.0
65	53.5	68.5	73.5	92.6	111	138	151	152	149	146	152	151	158	143	125	108	83.8	65.8	54.3
70	55.4	62.4	72.4	96.2	119	143	154	146	139	134	141	145	157	151	134	110	83.4	59.1	50.4
75	28.5	34.8	48.1	72.0	93.7	113	113	102	71.7	63.7	75.8	103	121	127	108	87.3	57.2	33.8	26.0
80	6.22	8.29	17.8	38.7	45.9	52.2	49.3	32.5	15.6	12.1	16.8	35.1	57.0	61.1	53.4	46.4	19.9	8.24	6.27
85	1.85	2.74	4.76	8.11	6.25	6.81	10.1	7.74	5.05	4.38	5.15	7.72	12.1	7.43	6.72	8.60	5.39	3.04	2.10
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:LYJ
 Test Date:2021-10-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:1.900m [K=0.6108]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:2.8780V I:1.1000A P:3.1659W PF:1.0000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.35x1 lm		
NAME: BL04-003-4080-R03201	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C (DEG) γ (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01		
5	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01		
10	0.01	0.01	0.01	0.01	0.02	0.03	0.05	0.06	0.07	0.07	0.06	0.04	0.03	0.01	0.01	0.01	0.01		
15	0.01	0.03	0.08	0.15	0.24	0.30	0.41	0.47	0.52	0.50	0.45	0.37	0.29	0.19	0.12	0.05	0.02		
20	0.07	0.18	0.39	1.35	2.49	3.87	5.66	6.48	6.55	6.67	6.40	4.86	3.28	1.89	0.53	0.27	0.13		
25	0.28	1.36	2.80	5.54	7.89	9.25	11.8	13.5	13.7	14.0	12.8	10.5	9.80	7.08	4.07	2.70	0.43		
30	2.38	4.75	9.36	12.2	16.9	18.4	20.9	26.9	27.2	27.7	23.5	22.0	19.5	16.3	10.8	5.98	3.07		
35	4.93	9.86	16.9	20.5	27.6	32.1	36.1	42.0	42.1	43.0	38.9	36.9	33.0	24.9	20.9	12.5	6.33		
40	10.7	17.1	23.9	34.6	42.2	47.7	57.9	59.5	59.2	60.4	58.4	53.4	45.0	38.4	28.7	23.4	12.7		
45	17.6	24.6	35.7	47.6	61.5	64.5	78.5	79.7	80.8	80.8	78.0	69.0	60.5	48.8	42.8	30.9	24.8		
50	26.3	35.3	52.7	63.9	79.5	84.2	96.1	101	104	102	94.4	85.2	77.8	63.1	54.5	39.9	33.4		
55	39.8	43.1	65.7	80.9	95.6	106	119	120	118	120	116	109	92.7	75.8	66.2	53.7	46.5		
60	59.6	64.8	84.5	99.4	118	130	136	135	133	136	133	131	112	91.5	81.3	67.7	60.5		
65	68.3	76.9	100	119	140	149	149	145	142	146	145	149	132	108	93.2	78.7	69.4		
70	59.3	75.8	107	131	146	151	143	137	131	137	140	153	137	116	93.2	77.6	62.3		
75	33.2	53.1	84.6	109	125	119	103	80.1	62.7	77.9	98.1	116	110	90.7	70.8	49.8	33.6		
80	7.92	19.2	45.2	57.2	61.9	60.3	37.9	17.7	13.6	17.2	33.8	54.5	51.8	45.5	37.1	18.1	8.25		
85	2.86	5.26	9.71	7.38	7.99	12.5	9.05	5.85	4.65	5.95	8.50	11.8	7.40	6.86	7.94	5.13	2.71		
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:LYJ
 Test Date:2021-10-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:1.900m [K=0.6108]
 Remarks: