



# POWER-LITE®

Certainty at The Speed of Light



## LED SLIMLINE 3CCT

### FLOOD LIGHT

DFL30W-B-CC, DFL50W-B-CC, DFL-S-IP65

The POWER-LITE® LED Slimline Flood Light combines sleek, modern design with high performance and durability. Built with a robust die-cast aluminium housing, it delivers excellent heat dissipation and long-lasting reliability in both indoor and outdoor environments. Offering IP65 protection, this versatile floodlight is ideal for domestic and light commercial applications. It features CCT interchangeable options for flexible colour temperature selection and is available in 30W and 50W models with high lumen efficiency. An optional PIR sensor module provides energy-saving motion control, with a matching IP65-rated interface.

#### APPLICATIONS

Domestic



1800 909 306

[nedlandsgroup.com.au](http://nedlandsgroup.com.au)

[sales@nedlandsgroup.com.au](mailto:sales@nedlandsgroup.com.au)




# POWER-LITE®

Certainty at The Speed of Light

## DIMENSIONS (L x W x D mm)

DFL30W-B-CC 160 (A) x 110 (B) x 31 (C)  
DFL50W-B-CC 200 (A) x 145 (B) x 32 (C)

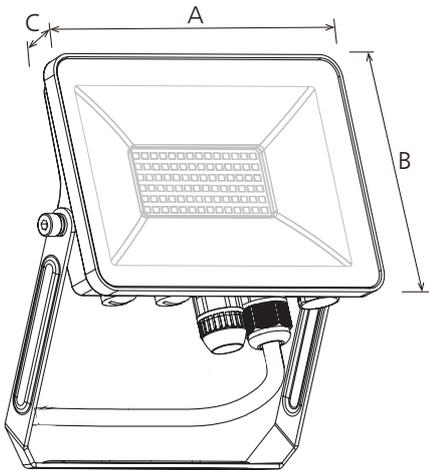

**LED Chip**  
SMD

**CRI**  
80

**Life Expectancy**  
50,000 hrs

**Material**  
Die Cast Aluminium body  
PC / Glass Optics

**Working Temp**  
-20°C to +50°C

**LED Driver**  
Non-Dimmable, Built-in

**SCDM**  
<6 Macadam steps

**Connection**  
0.6M Power Cable

**Power Factor**  
>0.9

**Factory Setting**  
DFL30W: is set to 30W and 3000K  
DFL50W: is set to 50W and 3000K

 15/20/30W  
30/40/50W

 3CCT

 AC220-240V

 Black Frame Colour

## PRODUCT

## CODE

LED SLIMLINE FLOOD LIGHT	15W	20W	30W	DFL30W-B-CC
15/20/30W ADJUSTABLE	 3000K 1,755lm	 3000K 2,233lm	 3000K 2,987lm	
	 4000K 1,941lm	 4000K 2,496lm	 4000K 3,649lm	
	 5700K 1,905lm	 5700K 2,428lm	 5700K 3,380lm	
LED SLIMLINE FLOOD LIGHT	30W	40W	50W	DFL50W-B-CC
30/40/50W ADJUSTABLE	 3000K 3,540lm	 3000K 4,537lm	 3000K 5,459lm	
	 4000K 3,931lm	 4000K 4,887lm	 4000K 6,199lm	
	 5700K 3,842lm	 5700K 4,644lm	 5700K 5,879lm	
PLUG-IN PIR SENSOR				DFL-S-IP65

 IP65

 IK06

 100°  
Beam Angle




# POWER-LITE®


Certainty at The Speed of Light

## PHOTOMETRICS


DFL30W-B-CC | 3000K | 15W

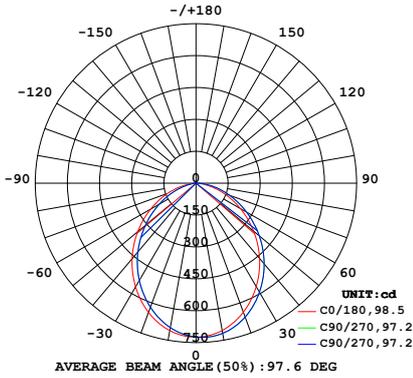


DFL30W-B-CC | 4000K | 15W

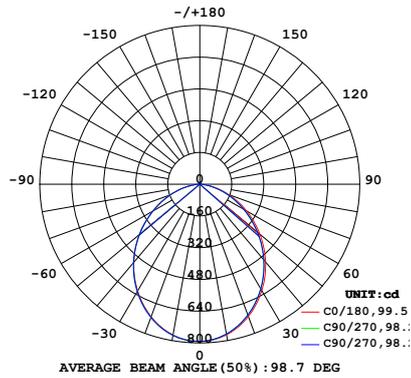


DFL30W-B-CC | 5700K | 15W

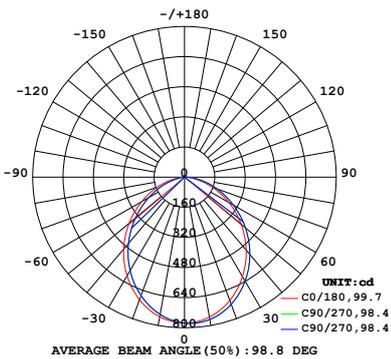


DFL30W-B-CC | 3000K | 30W

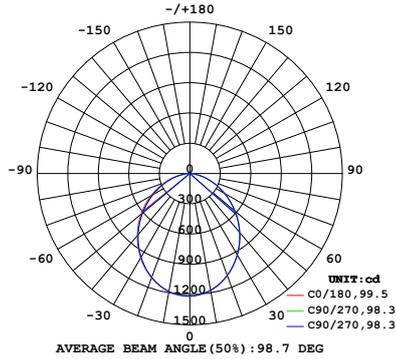

DFL30W-B-CC | 4000K | 30W

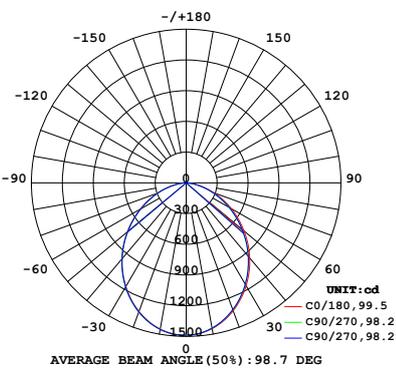

DFL30W-B-CC | 5700K | 30W

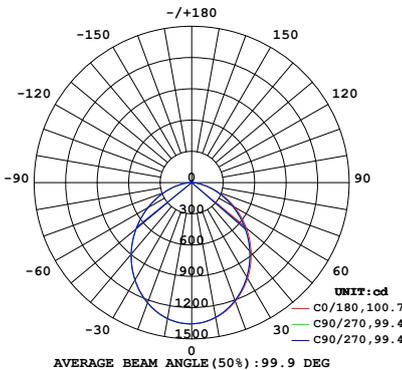




# POWER-LITE®


Certainty at The Speed of Light

## PHOTOMETRICS


DFL50W-B-CC | 3000K | 30W

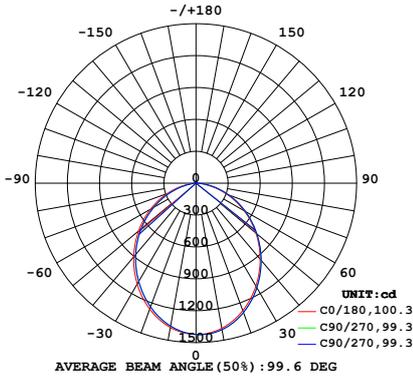


DFL50W-B-CC | 4000K | 30W

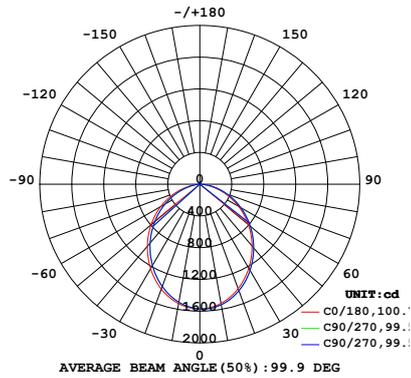


DFL50W-B-CC | 5700K | 30W

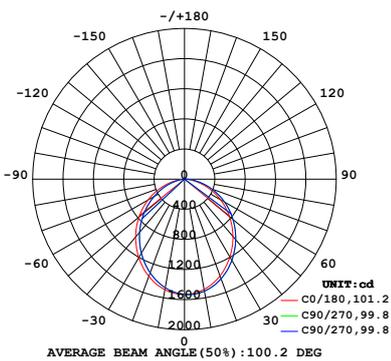

DFL50W-B-CC | 3000K | 50W

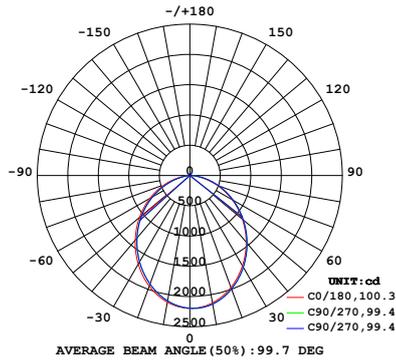

DFL50W-B-CC | 4000K | 50W

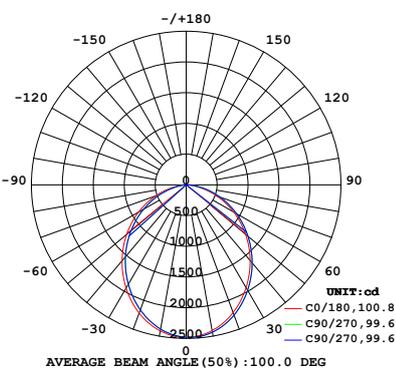

DFL50W-B-CC | 5700K | 50W

