


INSTALLATION MANUAL





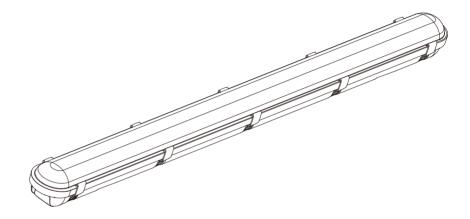

L 1800 909 306



nedlandsgroup.com.au




sales@nedlandsgroup.com.au

LED WEATHERPROOF



WP18W-CW WP36W-CW



Please read the following instructions carefully to ensure that the installation is carried out correctly. These instructions should be retained for future reference.

Specifications

Model no.	WP12W	WP18W	WP24W	WP36W	WP30W	WP48W
Rated voltage	220-240V~					
Frequency	50/60Hz					
Rated power	12W	18W	24W	36W	30W	48W
Lumens	1000lm	1500lm	2000lm	3000lm	2500lm	4000lm
Protection class	II					
Protection	IP65					

Safety Instructions

- 1. Use H07RN-F, 2 x 1.0mm² rubber cable.
- 2. Luminaire should be installed by a registered electrician only, in accordance with national wiring codes. If the external flexible cable of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or their service agent in order to avoid a hazard.
- 3. The power supply must be isolated prior to installation, maintenance, exchanging the LED chips or cleaning.
- 4. Picture 1: Un-screw the gland.
- 5. Use a screw driver to open the terminal box.
- 6. Connect brown wire (L) to terminal L, blue wire (N) to terminal N and earth in accordance with wiring codes.
- 7. Replace the terminal box cover.

